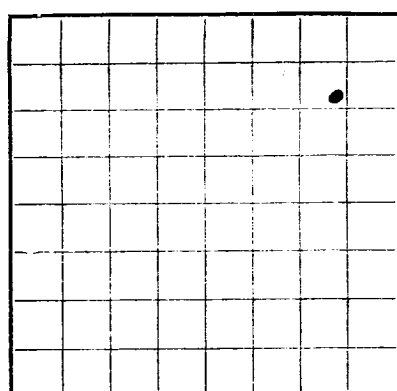


U. S. LAND OFFICE Santa Fe
SERIAL NUMBER 078507
LEASE OR PERMIT TO PROSPECT C. Lester Linder

LOCATE WELL CORRECTLY

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

Company Three States Natural Gas Co. Address Farmington, New Mexico
Lessor or Tract C. Lester Linder Field Blanco Pool (Ext) State New Mexico
Well No. 1 Sec. NE 1 T 31N R. 10W Meridian N.M.P.M. County San Juan
Location 1190 ft. 24 of N Line and 820 ft. 12 of E Line of Sec. 1 Elevation 6704 DF
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed W.D. BellmonDate June 16, 1953Title Field Supt.

The summary on this page is for the condition of the well at above date.

Commenced drilling April 24, 1953 Finished drilling May 23, 1953

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 5400' to 5485' G No. 4, from _____ to _____
No. 2, from 5485' to 5815' G No. 5, from _____ to _____
No. 3, from 5815' to 6000' G No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
10 3/4"	40.5#	8rd.	E.L.	212.21'	Larkin				Surface
7"	23#	8rd.	E.L.	5301.15'	Baker				Production
2 3/8"	9.7#	11.5rd.	E.L.	5301.15'	Baker				Production
HISTORY OF OIL OR GAS WELL									

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
10 3/4"	227'	115 Reg. Ideal	Howco		
7"	5260'	100 Reg. & 110 Bridget	Howco		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
	Completed Natural					

TOOLS USED

Rotary tools were used from Surface feet to 6005' feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

_____ June 5, 1953 Put to producing _____, 19____

The production for the first 24 hours was _____ barrels of fluid of which _____% was oil; _____% emulsion; _____% water; and _____% sediment. Gravity, °Bé. _____

If gas well, cu. ft. per 24 hours 5,056,000 Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

_____Paul Brown_____, Driller _____G. W. Robinson_____, Driller
_____Cecil Pearce_____, Driller _____G. K. Briscoe_____, Driller
_____XXXX_____, Pusher

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
Surface	2785'	2785'	Sand & Shale
2785'	3107'	322'	Shale with Sand Streaks
			Top Fruitland 3107'
3107'	3545'	438'	Shale, Sand & Coal
			Top Picture Cliffs 3545'
3545'	3680'	135'	Sand & Shale
			Top Lewis 3680'
3680'	5090'	1410'	Shale & Silt
5090'	5260'	170'	Shale with Sand Streaks
No log or samples from	5260' to 6005'		
TD 6005'			

FROM TO TOTAL FEET (OVER) FORMATION 16-43094-2

FORMATION RECORD—Continued