




U. S. LAND OFFICE Santa Fe
SERIAL NUMBER 11-20-60-122
LEASE OR PERMIT TO PROSPECT _____

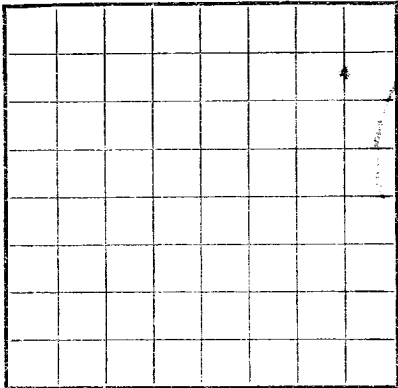

LOCATE WELL CORRECTLY



UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY



U. S. GEOLOGICAL SURVEY
DEPT. OF THE INTERIOR
WASHINGTON, D. C.

LOG OF OIL OR GAS WELL

Company Standard Oil Co. of Texas Address Box 1531, Santa Fe, New Mexico
Lessor or Tract Ute Mtn. Tribal 2-29 Field Narde Gallup State New Mexico
Well No. 10 Sec. 29 T. 31N R. 14W Meridian NMP County San Juan
Location 270 ft. S. of N. Line and 660 ft. E. of N. Line of Sec. 29 Elevation 5623
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.
Signed [Signature]

Date July 6, 1960 Title Field Log

The summary on this page is for the condition of the well at above date.

Commenced drilling 1/22, 1960 Finished drilling 5/3, 1960

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 3470 to 3672 No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
8 5/8	24	8	J-55	131	Guide	-	0	0	Surface
5 1/2	14	8	J-55	3470	Float	-	-	-	Oil string
4"	11.6	Hydril	J-55	217	Guide	-	3547	3672	Liner

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
8 5/8	131	125	Plug	9.0	
5 1/2	3470	200	Two stage	9.2	

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out

TOOLS USED

Rotary tools were used from 0 feet to 3672 feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

July 6, 1960 Put to producing July 1, 1960

The production for the first 24 hours was 120 barrels of fluid of which 100% was oil; 0% emulsion; 0% water; and 0% sediment. Gravity, °Bé. _____

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

Gurham, Driller Triscoe, Driller
Sinos, Driller _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
TOPS			Cliffhouse
1083			
1274			Sanefee
1990			Point Lookout
2344			Sancoe
2752			Ute Sand
3405			Upper Gallup

