

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well gas ☒ well other ☐
2. NAME OF OPERATOR
Southland Royalty Company
3. ADDRESS OF OPERATOR
P.O. Drawer 570, Farmington, New Mexico 87401
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 790' FNL & 950' FWL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐

SUBSEQUENT REPORT OF:

☐
☐
☐
☐
☐
☐
☐
☐
☐


(other) Perforation & Stimulation X
Production Tubing Report X

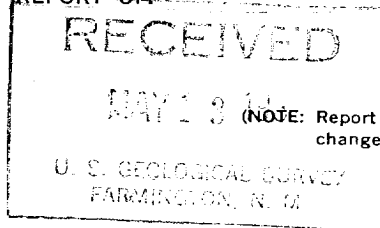

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

5-09-81 Perforate the Pictured Cliffs at 3498', 3508', 3518', 3528', 3538', 3570', 3580', 3590', 3600', 3610' & 3620'. Total of 11 holes. Frac'd Pictured
5-10-81 Cliffs with 124,572 gallons of fresh water and 117,138# of 20/40 sand. ATP 2300 psi, AIR 23 BPM, ISIP 900 psi. Ran 116 joints (3596.90') of 1-1/2", 2.90#, CSR-55, EUE tubing set at 3608'.



Subsurface Safety Valve: Manu. and Type _____

18. I hereby certify that the foregoing is true and correct

SIGNED Arthur G. [Signature] TITLE Drilling Clerk DATE May 12, 1981

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

ACCEPTED FOR RECORD

NMOCC

MAY 15 1981

*See Instructions on Reverse Side

FARMINGTON DISTRICT
BY [Signature]