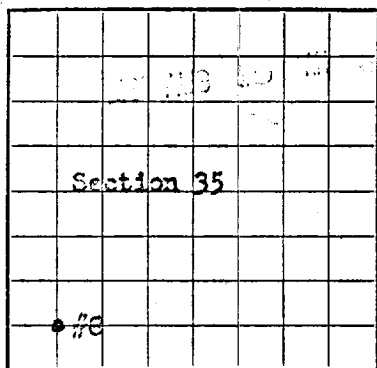


Form 9-330

Form approved,
Budget Bureau No. 42-R355.4.

LOCATE WELL CORRECTLY

U. S. LAND OFFICE Window Rock
SERIAL NUMBER 14-20-600-3510
LEASE OR PERMIT TO PROSPECT Navajo "P"UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

Company Skelly Oil Company Address Box 730 - Hobbs, New Mexico
 Lessor or Tract Navajo "P" Field Many Rocks Gallup State New Mexico
 Well No. 8 Sec. 35 T. 32N R. 17W Meridian N.M.P.M. County San Juan
 Location 660 ft. [N.] of S. Line and 660 ft. [E.] of W. Line of Section 35 Elevation 5474' DF
 (Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon
 so far as can be determined from all available records.

Signed

(ORIGINAL)
(Name) H. E. AabDate August 7, 1963Title Dist. Supt.

The summary on this page is for the condition of the well at above date.

Commenced drilling July 6, 1963 Finished drilling July 9, 1963

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 1712' to 1718' No. 4, from _____ to _____
 No. 2, from _____ to _____ No. 5, from _____ to _____
 No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
 No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
<u>7-5/8"</u>	<u>17.7</u>	<u>3</u>	<u>8-B</u>	<u>1760'</u>	<u>Guide</u>	<u>1713' - 1718'</u>			<u>Surface</u>
<u>4-1/2"</u>	<u>9.5</u>	<u>3</u>	<u>8-B</u>	<u>1760'</u>	<u>Float</u>	<u>1713' - 1718'</u>			<u>Production</u>

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
<u>7-5/8"</u>	<u>28'</u>	<u>8</u>	<u>By Hand</u>	<u>---</u>	<u>---</u>
<u>4-1/2"</u>	<u>1766'</u>	<u>100</u>	<u>Pump & Plug</u>	<u>---</u>	<u>---</u>

118K