

(SUBMIT IN TRIPLICATE)

Indian Agency

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Navajo Ute

Allottee Mountain Tribal

Lease No. 14-20-600-9540

Sec. 35		

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	XX
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO REDRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF REDRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....	Perforate & Fracture	XX

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Hobbs, New Mexico August 1, 1963Well No. 7 is located 1900 ft. from XX line and 1900 ft. from E line of sec. 35NM/A SE/A
(1/4 Sec. and Sec. No.)32N
(Twp.)17W
(Range)N.M.P.M.
(Meridian)Undesignated Gallup
(Field)San Juan
(County or Subdivision)New Mexico
(State or Territory)

RECEIVED

AUG 5 1963

The elevation of the derrick floor above sea level is 5459 ft. **KB**

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Well spudded June 27, 1963. Set 7-5/8" OD casing at 29' and cemented with 75 sacks of cement by hand. W.O.C. Drilled to 1353'.

CORE NO. 1 - 1353' - 1373' - Recovered 12.2'

Top - 2'.0 - Gray shale with thin sand laminations

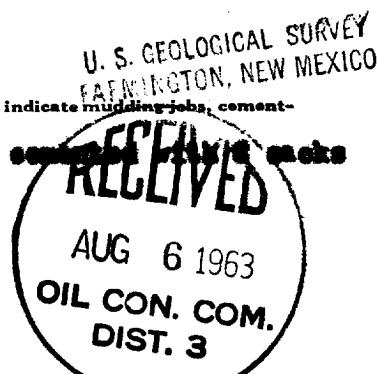
Next - 7'.0 - Fine grain gray sand with good stain and odor

Next - 7'.0 - Black Shale

Last - 3'.2 - Shale with thin lime laminations

Reached total depth of 1416' on July 1, 1963. Set 7-5/8" OD casing at 1413' and cemented with 75 sacks of cement. W.O.C. 24hrs. Shut off tested OK. Did not drill out cement plug at 1400' P.B.T.D. 1400'. Perforated 7-5/8" OD casing from 1353' - 1361' for a total of 8' and 32 holes. Treated through 7-5/8" OD casing perfs. 1353' - 1361' with 31,000 gallons lease oil and 30,000# 20/40 sand and 6 - 7/8" ball sealers. After recovering all lease oil well pumped 136 bbls of oil in 24 hours.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Shelly Oil CompanyAddress Box 730Hobbs, New MexicoBy J E GaltTitle Dist. Supt.

1000
1000

1000
1000

1000

1000

1000
1000

1000
1000

1000
1000

1000

1000
1000

1000
1000

1000
1000

1000
1000

1000
1000

1000
1000

1000
1000

1000
1000