

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
Sundry Notices and Reports on Wells

1. Type of Well
Oil
2. Name of Operator
Texas Pacific Oil & Gas Co., C/O Joseph E. Seagrams & Sons, Inc.
3. Address & Phone No. of Operator
800 3rd Ave., New York City, NY 10022-7699
4. Location of Well, Footage, Sec., T, R, M
1850' FSL and 990' FEL Sec. 27, T-32-N, R-17-W, NMPM
L
5. Lease Number
14-20-603-5012
6. If Indian, All. or Tribe Name
Navajo
7. Unit Agreement Name
N/A
8. Well Name & Number
Navajo #7
9. API Well No.
30-045-1125400
10. Field and Pool
Many Rocks
11. County & State
San Juan County, NM

12. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OTHER DATA

Type of Submission

Type of Action

☒ Notice of Intent

☒ Abandonment

☐ Change of Plans

☐ Subsequent Report

☐ Recompletion

☐ New Construction

☐ Final Abandonment

☐ Plugging Back

☐ Non-Routine Fracturing

☐ Casing Repair

☐ Water Shut off

☐ Altering Casing

☐ Conversion to Injection

☐ Other -

13. Describe Proposed or Completed Operations

Texas Pacific Oil and Gas Co., proposes to Plug and Abandon this well per the attached procedure and diagram.

RECEIVED
MAR - 3 1997

OIL CON. DIV.
DIST. 3

070 INMOC
97 FEB 25 AM 8:14

14. I hereby certify that the foregoing is true and correct.

Signed William F. Clark Title Contractor Date 2/24/97
William F. Clark, A-Plus Well Service

(This space for Federal or State Office use)

APPROVED BY IS/Duane W. Spencer Title _____ Date FEB 27 1997

CONDITION OF APPROVAL, if any:

INMOC

Navajo #7

Proposed P&A

Many Rocks Gallup

1850'S, 990'E Sec 27, T-32-N, R-17-W, San Juan County, NM

Today's Date: 2/20/97

Spud: 8/9/63


Completed: 8/30/63

Mancos @ Surface

Gallup @ 952'

Sanostee @ 1308'

6-3/4" Hole

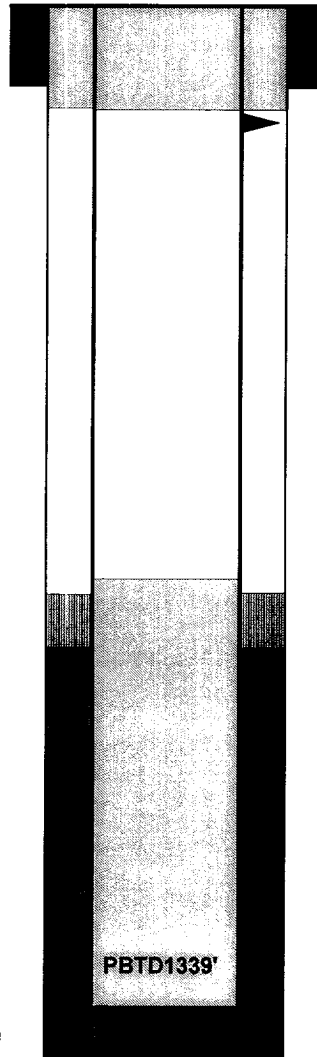

7-5/8" Casing Set @ 32'
Cmt with 10 sxs (Circulated to Surface)

Perforate at 82'

Plug #2 82' - Surface
Cmt with 17 sxs Class B.

TOC @ 977' (Calc, 100%)

TOC @ 1067' (Calc, 75%)

Plug #1 1339' - 902'
Cmt with 50 sxs Class B
(50% excess, long plug)

Gallup Perforations:
1283' - 1292'

4-1/2" Casing Set @ 1339'
Cemented with 35 sxs (50 cf)

Well History:

7-5/8" Surface Casing set at 32' cemented to surface

4-1/2" Casing set at 1339' with 35 sxs cement with
12.5# gilsonite (assumed).

Gallup zone perforated 1283' - 1292' with 4 SPF .

May have been converted to water injection well.

Proposed Plugging Procedure:

1. RIH with tubing work string. Plug #1 from 1339' to 902' with 51 sxs Class B cement. POH with tubing.
2. WOC and then tag cement. Pressure test casing to 300#. POH with tubing.
3. Perforate 2 squeeze holes at 82'. Establish circulation out bradenhead. Mix and pump 17 sxs Class B cement from 82' to surface, circulate good cement out bradenhead.
4. WOC then cut off wellhead and install P&A marker.