

January 16, 1978

United States Geological Survey P. O. Box 959 Farmington, New Mexico 87410

Attention: Mr. P. T. McGrath

Dear Sir:

Enclosed please find a map showing existing roads and planned access roads to Southland Royalty Company's Hubbard #2A well. The locations of tank batteries and flow lines will be on location with well. A burn pit will be provided for disposal of trash. Cuttings, drilling fluid and produced fluids will be put into the reserve pit and properly disposed of depending on amount and type of fluids.

There will be no camps or air strips.

Also, enclosed is location layout showing approximate location of rig, pits and pipe racks.

Water supply will be Farmer's Ditch

The location will be restored according to Bureau of Land Management standards. This work will begin when all related construction is finished.


Mr. Max Larson will be Southland Royalty Company's field representative supervising these operations.

Yours truly,

SOUTHLAND ROYALTY COMPANY

L. O. Van Ryan District Production Manager

LOVR/dg

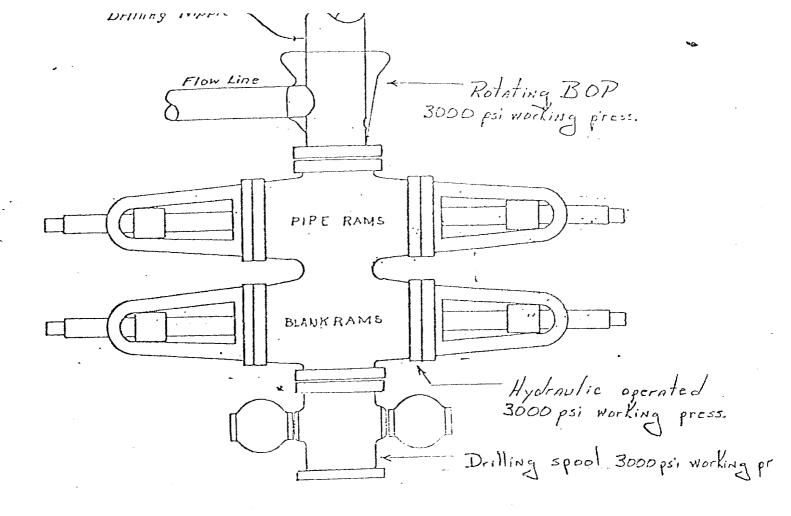

Preventers and spools are to have through bore of 6" - 3000# PSI or larger.



January 16, 1978

United States Geological Survey P. O. Box 959 Farmington, New Mexico

Attention: Mr. P. T. McGrath

Re: Blowout Preventer Plan

Dear Sir:

All drilling and completion rigs will be equipped with 6" or larger double gate hydraulic blowout preventers and a Hydraulic operated closing unit with steel lines.

The preventer is 3000# working pressure and 6000# test.


All crews will be thoroughly trained in the operation of this preventer. The preventer will be tested at the beginning of every tower change to insure proper operation.

Yours truly

L. O. Van Ryan

District Production Manager

LOVR/dg

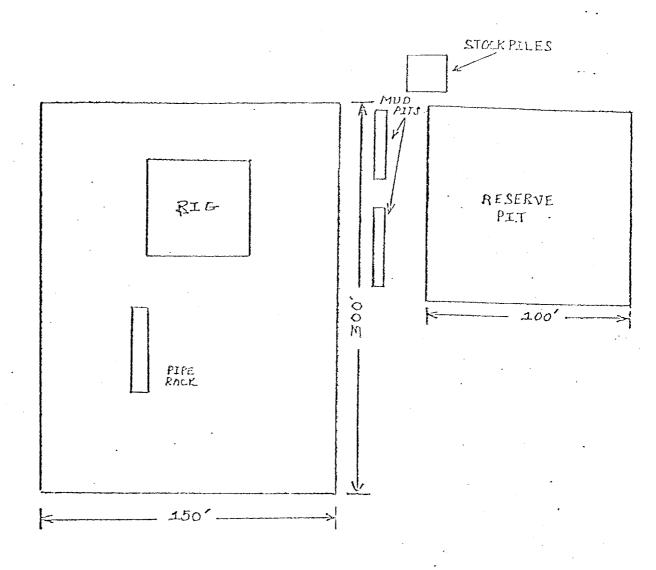

TRAILER

PARKING AREA

CUT REQUIRED FOR Above LOCATION: 6'

