

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well gas well other

2. NAME OF OPERATOR

Supron Energy Corp. % John H. Hill, et al
3. ADDRESS OF OPERATOR Suite 020, Kysar Building
300 W. Arrington, Farmington, New Mexico 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)

AT SURFACE: 930' FSL & 830' FEL (SE SE)

AT TOP PROD. INTERVAL:


AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

SUBSEQUENT REPORT OF:

- TEST WATER SHUT-OFF
- FRACTURE TREAT
- SHOOT OR ACIDIZE
- REPAIR WELL
- PULL OR ALTER CASING
- MULTIPLE COMPLETE
- CHANGE ZONES
- ABANDON*
- (other) Pictured Cliffs

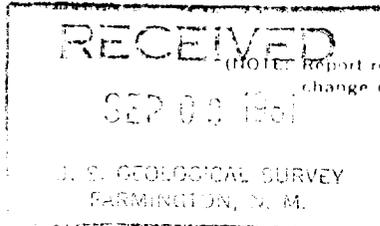

5. LEASE SF-078818A
 6. IF INDIAN, ALLOTTEE OR TRIBE NAME N/A
 7. UNIT AGREEMENT NAME N/A
 8. FARM OR LEASE NAME USA
 9. WELL NO. #3
 10. FIELD OR WILDCAT NAME Ballard Pictured Cliffs
 11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec 23 T 32N R 13W
 12. COUNTY OR PARISH San Juan 13. STATE New Mexico
 14. API NO.
 15. ELEVATIONS (SHOW DF, KDB, AND WD) 5986' GR

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

We respectfully request permission to set cast iron bridge plug #1 at 1764. (Base of Pictured Cliff Formation). Place 5 sx class "B" cement on top of bridge plug with wireline bailer for 60' fill up to 1710'. Set cast iron bridge plug #2 at 1606'(top of Pictured Cliffs Formation). Place 10 sx class "B" cement with wireline bailer on top of bridge plug for 100' fill up to 1506'. Place cast iron bridge plug #3 at 382' (bottom of 8 5/8" surface pipe). Place 10 sx class "B" cement with wireline bailer on top of bridge plug for 100' fill up to 282'. Spot cement plug from 50' to surface. Plugging operation to be commenced by displacing 4 1/2" casing with 9.5# mud. Plugged well to be marked per CFR 221.22.

VERBAL approval granted by Mr. Richard Bell, U.S.G.S., 10:30 a.m. MST, 8-31-81.
Call U.S.G.S. (325-4572) 1 hour prior to plugging- representative needs to be present.

Subsurface Safety Valve: Manu. and Type

Set @

18. I hereby certify that the foregoing is true and correct

SIGNED *Thomas V. Wallis*

DATE

(This space for Federal or State office use)

APPROVED BY
CONDITIONS OF APPROVAL, IF ANY.

TITLE

DATE

NMOCC

*See Instructions on Reverse Side

