

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir  
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

RECEIVED  
BLM

070 FARMINGTON, NM

5. Lease Designation and Serial No.  
14-20-603-5013

6. If Indian, Allottee or Tribe Name  
Navajo

7. If Unit or A.A. Agreement Designation  
Navajo "M"

8. Well Name and No.  
M# 13

9. API Well No.  
30045254410051

10. Field and Pool, or Exploratory Area  
Many Rocks

11. County or Parish, State  
San Juan N.M.

1. Type of Well  
☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator  
A.P.A. Development, Inc.

3. Address and Telephone No.  
P.O. Box 215 Cortez, CO. 81321 (303) 565-2458

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
350' FNL 1650' FEL Sec 34 T32N R17W

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION
<input checked="" type="checkbox"/> Notice of Interest	<input type="checkbox"/> Abandonment
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Plugging Back
	<input type="checkbox"/> Casing Repair
	<input type="checkbox"/> Altering Casing
	<input type="checkbox"/> Other
	<input type="checkbox"/> Change of Plans
	<input type="checkbox"/> New Construction
	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Conversion to Injection
	<input type="checkbox"/> Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

RECEIVED  
NOV - 1 1994  
OIL CON. DIV.  
DIST. 3

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Plan to Plug well as follows:

1. equalize cement plug from 1830' to 1716'
2. pick up to 1715' circulate inhibited fluid to 50'
3. circulate cement plug 50' to surface
4. Weld on dry hole marker, clean and remediate location.

SEE ATTACHED FOR  
CONDITIONS OF APPROVAL

14. I hereby certify that the foregoing is true and correct

Signed Leland Wiley Title \_\_\_\_\_ Date 10/14/94

(This space for Federal or State office use)

Approved by \_\_\_\_\_ Title \_\_\_\_\_

Conditions of approval, if any:

APPROVED

OCT 25 1994

DEPT. MANAGER

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false statements or representations as to any matter within its jurisdiction


\*See Instruction on Reverse Side

NMOOD

Navajo M-13


Lease # 14-20-603-5013

existing Conditions.

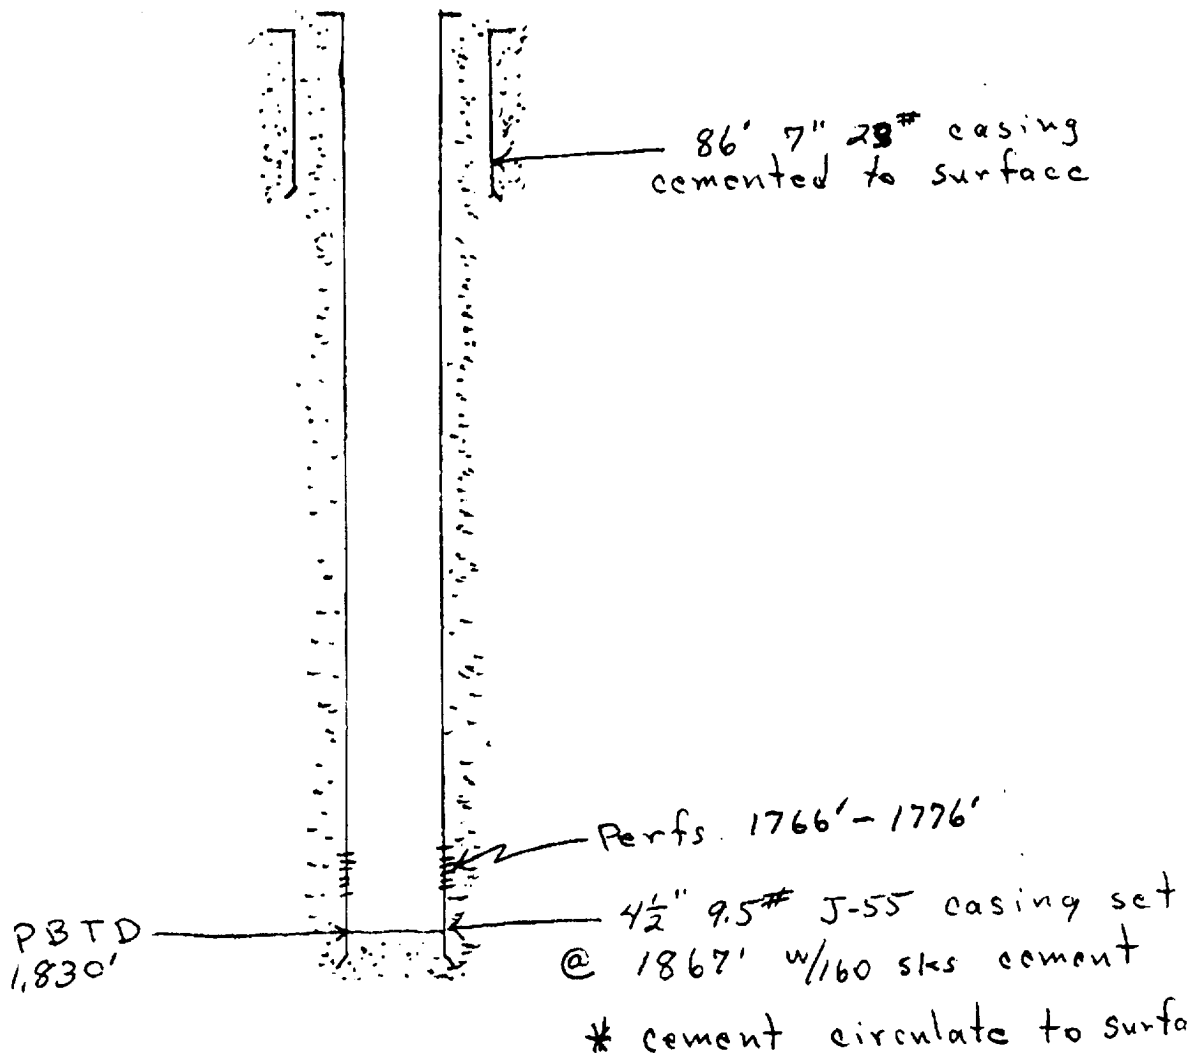

Navajo M-13

Lease # 14-20-603-5013

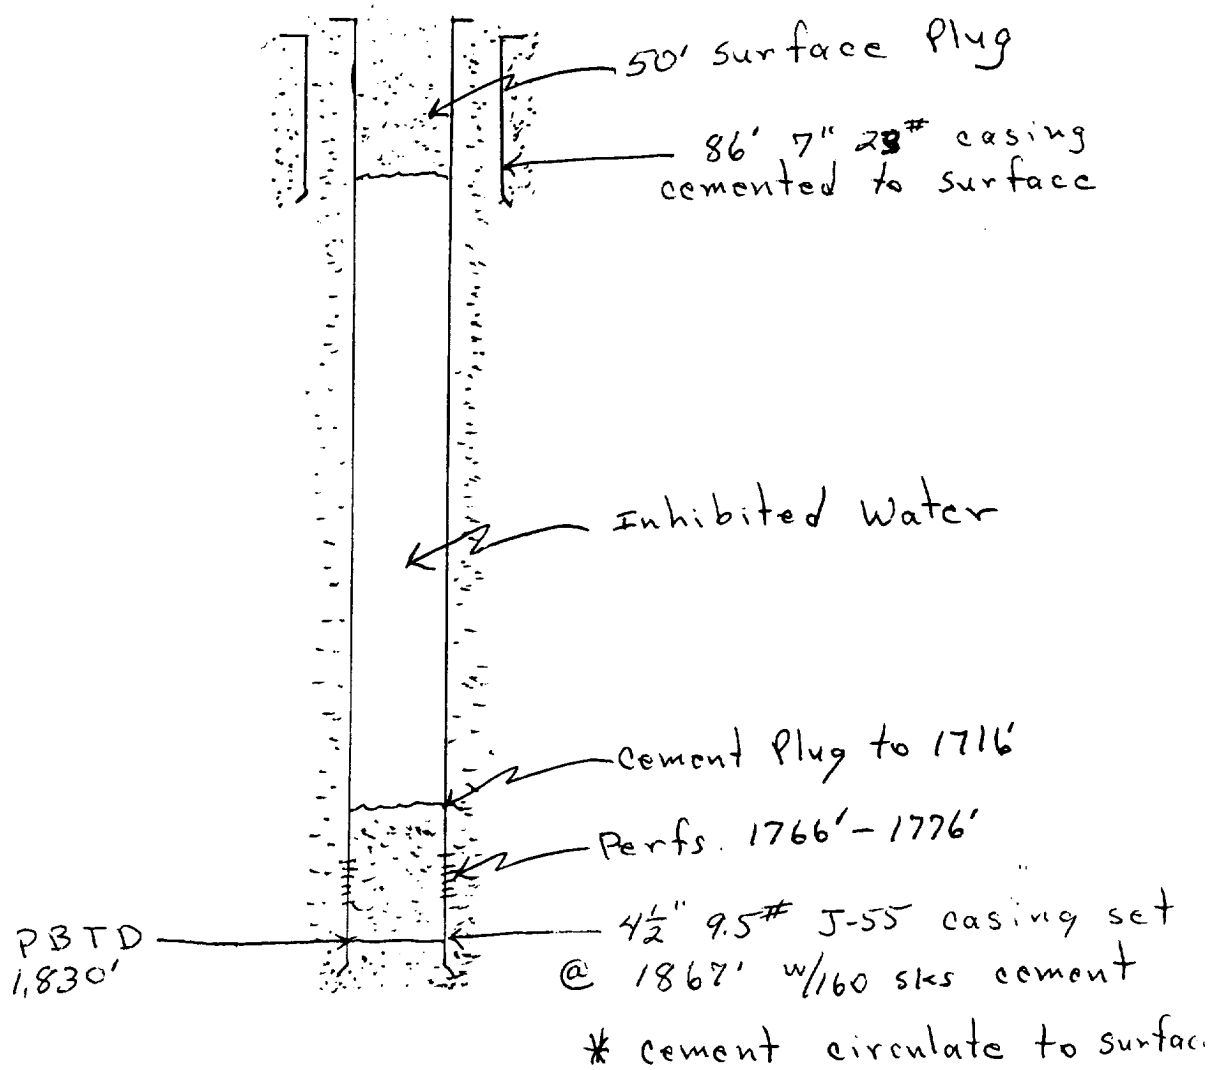

**UNITED STATES DEPARTMENT OF THE INTERIOR**

**BUREAU OF LAND MANAGEMENT  
FARMINGTON DISTRICT OFFICE**

1235 La Plata Highway  
Farmington, New Mexico 87401

Attachment to Notice of

Re: Permanent Abandonment

Intention to Abandon

Well: **13 Navajo M**

**CONDITIONS OF APPROVAL**

1. Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal and Indian Leases."

2. **Mike Flaniken** with the Farmington Office is to be notified at least 24 hours before the plugging operations commence (505) 599-8907.

3. The following modifications to your plugging program are to be made (when applicable):

1. **Tag top of cement plug @ 1716'.**

2. Spot a cement plug from 1489' to 1389' inside the casing plus 50 linear feet excess. (top of Gallup @ 1439')

3. Spot a cement plug from 380' to 280' inside the casing plus 50 linear feet excess. (bottom of Point Lookout @ 330')

4. Extend surface plug from 136' to the surface. (surface casing @ 86')

**Note:** The above modifications are minimum standards. It is acceptable to pump additional cement and combine plugs.