

30-045-05725

Land Office Santa Fe  
 Lease No. 081028-A  
 Unit Flood #1

STATE OF NEW MEXICO  
**OIL CONSERVATION  
 COMMISSION**

DISTRICT NO. 3  
 Phone 99 P. O. Box 697  
 AZTEC, NEW MEXICO

(SUBMIT IN TRIPLICATE)  
**UNITED STATES  
 DEPARTMENT OF THE INTERIOR  
 GEOLOGICAL SURVEY**

**SUNDRY NOTICES AND REPORTS ON WELLS**

NOTICE OF INTENTION TO DRILL	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL		SUBSEQUENT REPORT OF REDRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

June 13, 1951

Sullivan & Hill  
 Well No. 1 Flood is located 990 ft. from S line and 990 ft. from E line of sec. 24  
SE SE Sec. 24 26N 13 W N.M.P.M.  
 (1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)  
Wildcat San Juan County New Mexico  
 (Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 6111 ft.

**DETAILS OF WORK**

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

The objective sand is the Pictured Cliffs. The top is expected at about 1311 ft. The producing string will be 5 $\frac{1}{8}$ " O.D. casing which will be cemented. Surface casing, drilling casing and producing string will be set if and where needed approximately as follows:

100' - 8-5/8" O.D. - cement will be circulated  
 1311' - 5 $\frac{1}{8}$ " O.D. cemented with approximately 100 sacks.

Surface pipe will be set with cable tools. Remainder of hole will be cut with rotary. Well will then be shot with approximately 150 qts. of Nitro Glycerine from bottom of hole to within 10 feet of casing seat. Well will be cleaned out with cable tools.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company SULLIVAN & HILL  
JACK SULLIVAN, OPERATOR  
 Address 341 Foothill Road  
Beverly Hills, Calif.

By R. D. Young  
 Title Agent

DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY  
UNITED STATES  
(SUBMIT IN TRIPLICATE)

STATIONER  
OIL CONSERVATION  
COMMISSION  
STREET NO. 8  
P.O. Box 601  
ATLANTA, NEW MEXICO

SUNDRY NOTICES AND REPORTS ON WELLS

INDICATE ABOVE BY CHECKING		INDICATE BELOW BY CHECKING
NOTICE OF INTENTION TO ABANDON WELL		SUBSEQUENT REPORT OF WATER SHUT-OFF
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ALTERING CASING
NOTICE OF INTENTION TO RE-DRILL OR REAM WELL		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ABANDONMENT
NOTICE OF INTENTION TO CHANGE PLANS		SUPPLEMENTARY WELL HISTORY
NOTICE OF INTENTION TO DRILL	X	

(INDICATE ABOVE BY CHECKING)

(INDICATE BELOW BY CHECKING)

NOTICE OF INTENTION TO ABANDON WELL

NOTICE OF INTENTION TO PULL OR ALTER CASING

NOTICE OF INTENTION TO SHOOT OR ACIDIZE

NOTICE OF INTENTION TO RE-DRILL OR REAM WELL

NOTICE OF INTENTION TO TEST WATER SHUT-OFF

NOTICE OF INTENTION TO CHANGE PLANS

SUBSEQUENT REPORT OF WATER SHUT-OFF

SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING

SUBSEQUENT REPORT OF ALTERING CASING

SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR

SUBSEQUENT REPORT OF ABANDONMENT

SUPPLEMENTARY WELL HISTORY

Page 1 of 1

[illegible]

The elevation of the derrick floor above sea level is 6111 ft.

## DETAILS OF WORK

DETAILED OF WORK

The objective is to line with the required lifts. The top is expected to about 131 ft. The existing lining will be 130 ft. 0 in. casing which will be cemented. Surface casing, drilling casing and production casing will be set in and where needed approximately as follows:

1901 - 1908 U.S.D. - cement will be eliminated  
1911 - 1918 U.S.D. cemented with approximately 100 sacks.


150 lbs. of Nitro Glycerine from bottom of hole to within 10 feet  
surface pipe will be set with cable tools. Well will then be shot with dynamite  
remainder of hole.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be conducted.

Address \_\_\_\_\_  
 311 Footprint Road \_\_\_\_\_  
 3000, Bayview Ave. \_\_\_\_\_  
 Scarborough, Ontario \_\_\_\_\_  
 Canada \_\_\_\_\_

By \_\_\_\_\_  
Agent \_\_\_\_\_

**ELEVATION (ONLY)**




Company .....

Lease ..... Well No. ....

Sec. **24** T. **28** N., R. **15** W., N.M.P.M.

Location **990' from the S. line & 990' from the E. line**

**SAN JUAN** County New Mexico

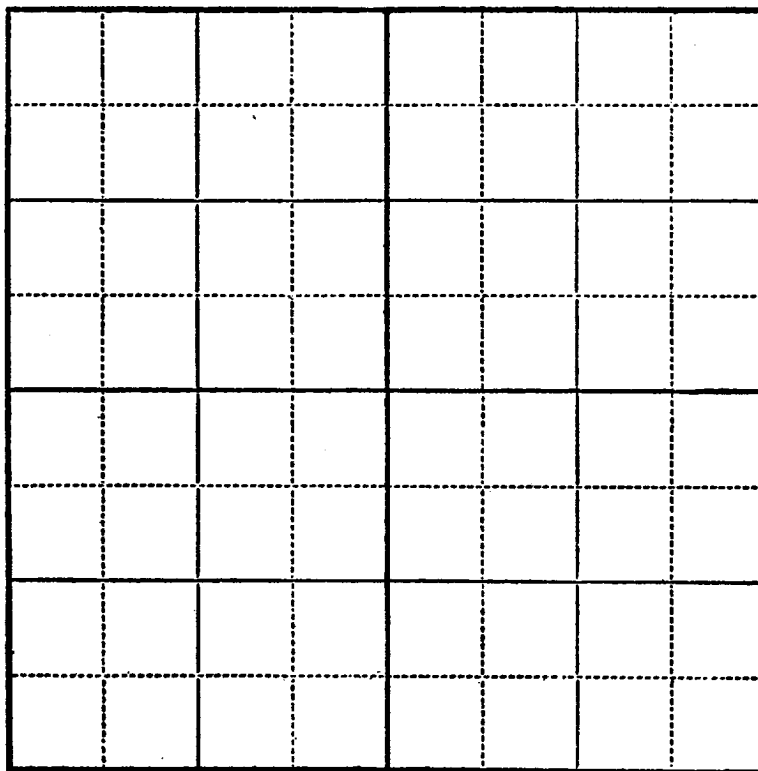

N

Scale—4 inches equals 1 mile.

REMARKS:

**GROUND ELEVATION = 6106.6 Ft.**

This is to certify that the above plat was prepared from field notes of actual surveys made by me or under my supervision and that the same are true and correct to the best of my knowledge and belief.

Seal:

*[Signature]*  
Registered Professional  
Engineer and Land Surveyor.

Farmington, New Mexico

Surveyed **on the 2nd of March of** **1**, 195