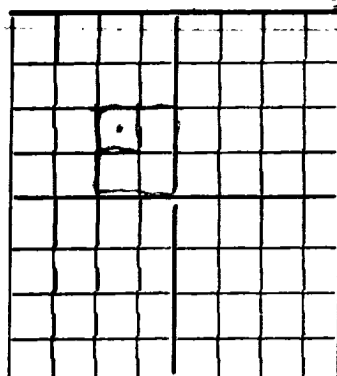


DUPLICATE
FORM C-105RECEIVED
JUL 27 1942
HOBBS OFFICE

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

1650/N - 1650/W

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

D. W. Stiles Farmington, New Mexico
Company or Operator
D. W. Stiles Well No. 1 of Sec. 15, T. 31 N
R. 13 W, N. M. P. M., Field, San Juan County.
Well is 330 feet south of the North line and 330 feet west of the East line of
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is D. W. Stiles, Address Farmington, New Mexico
If Government land the permittee is, Address
The Lessee is, Address
Drilling commenced June 27, 1940 Drilling was completed Sept. 15, 41
Name of drilling contractor D. W. Stiles, Address Farmington, N.M.
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing, 19.
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

, Driller, Driller
, Driller, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 20th day of July, 1942
Notary Public.
My Commission expires July 1, 1945
Name D. W. Stiles
Position
Representing
Company or Operator
Address

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	20	20	Boulders
20	95	75	Shale
95	100	5	Dry oil sand
100	200	100	Shale
200	413	213	Shale with small show oil
413	473	60	Dry oil sand
473	500	27	Lime and oil sand