




(SUBMIT IN TRIPLICATE)  
UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SANTA FE  
Land Office 070572-4  
Lease 1000 Section 4 to the  
Designated Delta State  
Unit

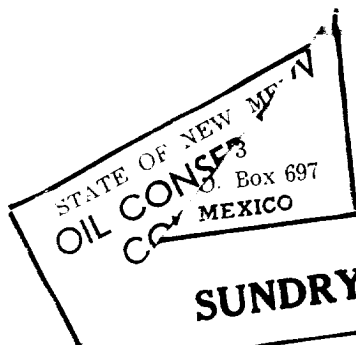

# SUNDRY NOTICES AND REPORTS ON WELLS

|                                                |  |                                            |  |
|------------------------------------------------|--|--------------------------------------------|--|
| NOTICE OF INTENTION TO DRILL                   |  | SUBSEQUENT REPORT OF WATER SHUT-OFF        |  |
| NOTICE OF INTENTION TO CHANGE PLANS            |  | SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING |  |
| NOTICE OF INTENTION TO TEST WATER SHUT-OFF     |  | SUBSEQUENT REPORT OF ALTERING CASING       |  |
| NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL |  | SUBSEQUENT REPORT OF REDRILLING OR REPAIR  |  |
| NOTICE OF INTENTION TO SHOOT OR ACIDIZE        |  | SUBSEQUENT REPORT OF ABANDONMENT           |  |
| NOTICE OF INTENTION TO PULL OR ALTER CASING    |  | SUPPLEMENTARY WELL HISTORY                 |  |
| NOTICE OF INTENTION TO ABANDON WELL            |  |                                            |  |

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Blank #10  
C 34 H2 H2

Well No. 10 is located 2055 ft. from 27N line and 990 ft. from EAT line of sec. 4  
San Juan (Twp.) (Range) (Meridian) New Mexico  
NOT INTERESTED (State or Territory)  
(Field) (County or Subdivision)

The elevation of the derrick floor above sea level is \_\_\_\_\_ ft.

## DETAILS OF WORK

- (State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)
1. Drill surface hole and run and set approximately 100' 8-5/8" surface casing and cement to surface.
  2. Test surface casing, cement plug and drill to base of Pictured Cliffs sandstone at approximately 2000'.
  3. Run electric log to total depth.
  4. Run and set approximately 1900' of 5 1/2" 4-40 lbf casing on top of Pictured Cliffs sandstone and cement with 150 sacks of cement.
  5. Move off safety tools, test production string cement plug, drill cement plug, clean out to bottom and shoot with nitro shot.
  6. Clean out after shot and complete well ready for production.

I understand that the above work is being done by the Geological Survey before operations may be commenced.

Company THE PICTURED CLIFFS OIL FIELD  
Address SAVIA, COLORADO

By [Signature]  
Title Geologist

NOTED

*[Faint handwritten notes at the bottom of the page]*

“होल”

RECEIVED  
JAN 10 1964  
U.S. DEPARTMENT OF JUSTICE  
FEDERAL BUREAU OF INVESTIGATION  
WASHINGTON, D.C.

40

10.

544

428

100

100

24-111

*[The page contains faint, illegible markings.]*

44

127

*Journal of Management Education* 30(6)


1000

132

100



Company The Frontier Refining Co.  
Lease Bolack-Government Well No. 10  
Sec. 4 T. 27 N., R. 11 W., N.M.P.M.  
Location 1055' from the North line and 990' from the East line.

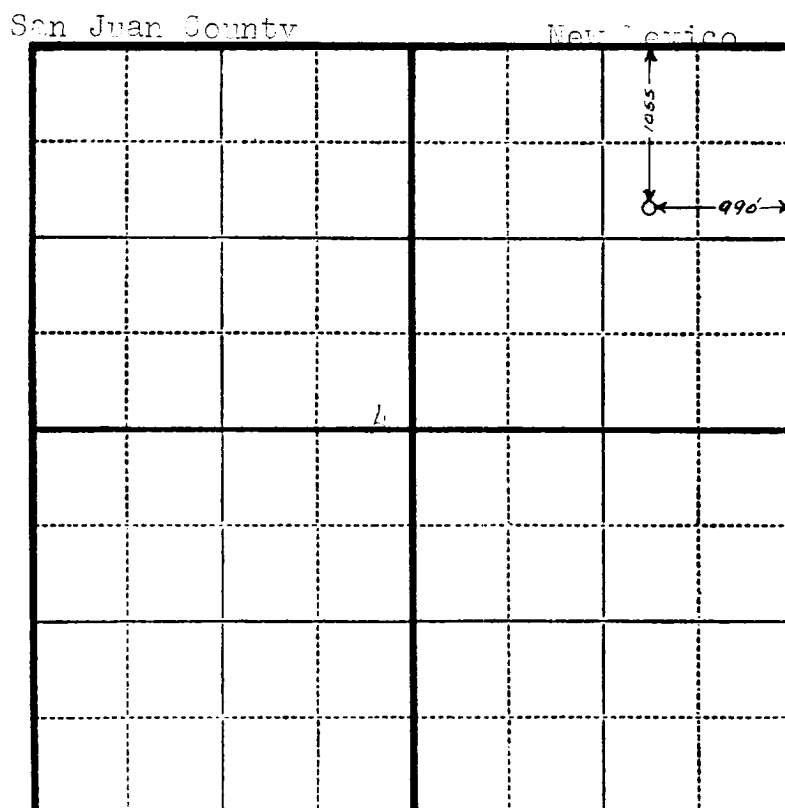

Scale—4 inches equals 1 mile.

This is to certify that the above plat was prepared from field notes of actual surveys made by me or under my supervision and that the same are true and correct to the best of my knowledge and belief.

Seal:

*Charles J. Finkler*  
Registered Professional Engineer and Land Surveyor. N. Mex. Reg. No. 1302

Surveyed October 26, 1951