

**PECOS DISTRICT
DRILLING CONDITIONS OF APPROVAL**

HOBBS OCD

APR 03 2018

OPERATOR'S NAME:	COG OPERATING LLC.
LEASE NO.:	NMNM120365
WELL NAME & NO.:	12H -HENNIN FEDERAL
SURFACE HOLE FOOTAGE:	210'/N & 2132'/E
BOTTOM HOLE FOOTAGE:	200'/S & 1980'/E
LOCATION:	Section 3., T26S., R.35E., NMP
COUNTY:	LEA County, New Mexico

RECEIVED

Potash	<input checked="" type="radio"/> None	<input type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave/Karst Potential	<input checked="" type="radio"/> Low	<input type="radio"/> Medium	<input type="radio"/> High
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input checked="" type="radio"/> Conventional	<input type="radio"/> Multibowl	
Other	<input type="checkbox"/> 4 String Area	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP

A. Hydrogen Sulfide

1. Hydrogen Sulfide (H₂S) monitors shall be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

1. The **10 3/4** inch surface casing shall be set at approximately **975** feet (a minimum of 25 feet into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.

d. If cement falls back, remedial cementing will be done prior to drilling out that string.

2. The minimum required fill of cement behind the 7 5/8 inch intermediate casing is:

- Cement to surface. If cement does not circulate see B.1.a, c-d above.

3. The minimum required fill of cement behind the 5 1/2 X 5 inch production casing is:

- Cement should tie-back at least **200** feet into previous casing string. Operator shall provide method of verification.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).
2. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M)** psi.
3. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the 7 5/8 inch intermediate casing shoe shall be **10,000 (10M)** psi. **Variance approved to use a 5M annular. The annular must be tested to full working pressure (5000 psi.)**

MHH 03142018

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Chaves and Roosevelt Counties
Call the Roswell Field Office, 2909 West Second St., Roswell NM 88201.
During office hours call (575) 627-0272.
After office hours call (575)

☒ Eddy County
Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

☒ Lea County
Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.

3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Operator shall perform the intermediate casing integrity test to 70% of the casing burst. This will test the multi-bowl seals.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after

installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time.
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

**PECOS DISTRICT
SURFACE USE
CONDITIONS OF APPROVAL**

OPERATOR'S NAME:	COG OPERATING LLC.
LEASE NO.:	NMNM120365
WELL NAME & NO.:	12H -HENNIN FEDERAL
SURFACE HOLE FOOTAGE:	210'/N & 2132'/E
BOTTOM HOLE FOOTAGE:	200'/S & 1980'/E
LOCATION:	Section 3., T26S., R.35E., NMP
COUNTY:	LEA County, New Mexico

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
 - Lesser Prairie-Chicken Timing Stipulations
 - Below Ground-level Abandoned Well Marker
 - Range
 - Tank Battery
- ☐ **Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- ☐ **Road Section Diagram**
- ☐ **Production (Post Drilling)**
 - Well Structures & Facilities
- ☐ **Interim Reclamation**
- ☐ **Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Timing Limitation Stipulation / Condition of Approval for lesser prairie-chicken:

Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 feet from the source of the noise.

Below Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well. For more installation details, contact the Carlsbad Field Office at 575-234-5972.

Tank Battery:

Tank battery locations will be lined and bermed. A 20 mil permanent liner will be installed with a 4 oz. felt backing to prevent tears or punctures. Tank battery berms must be large enough to contain 1 ½ times the content of the largest tank or 24 hour production, whichever is greater. Automatic shut off, check valves, or similar systems will be installed for tanks to minimize the effects of catastrophic line failures used in production or drilling.

Range

The allotment fence shall not be damaged during construction of this location. If fence is damaged then construction will be halted till the blm has been contacted and the fence has been repaired.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS**Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outsloping and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

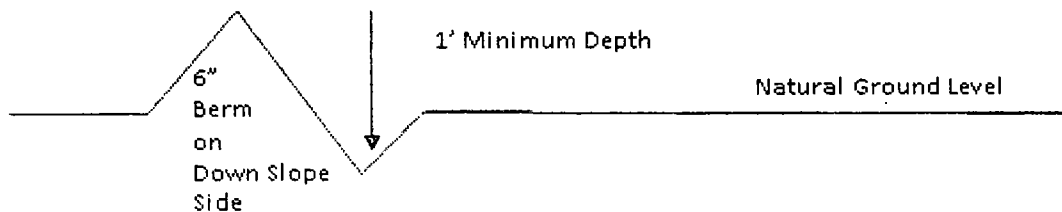

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattle guards

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

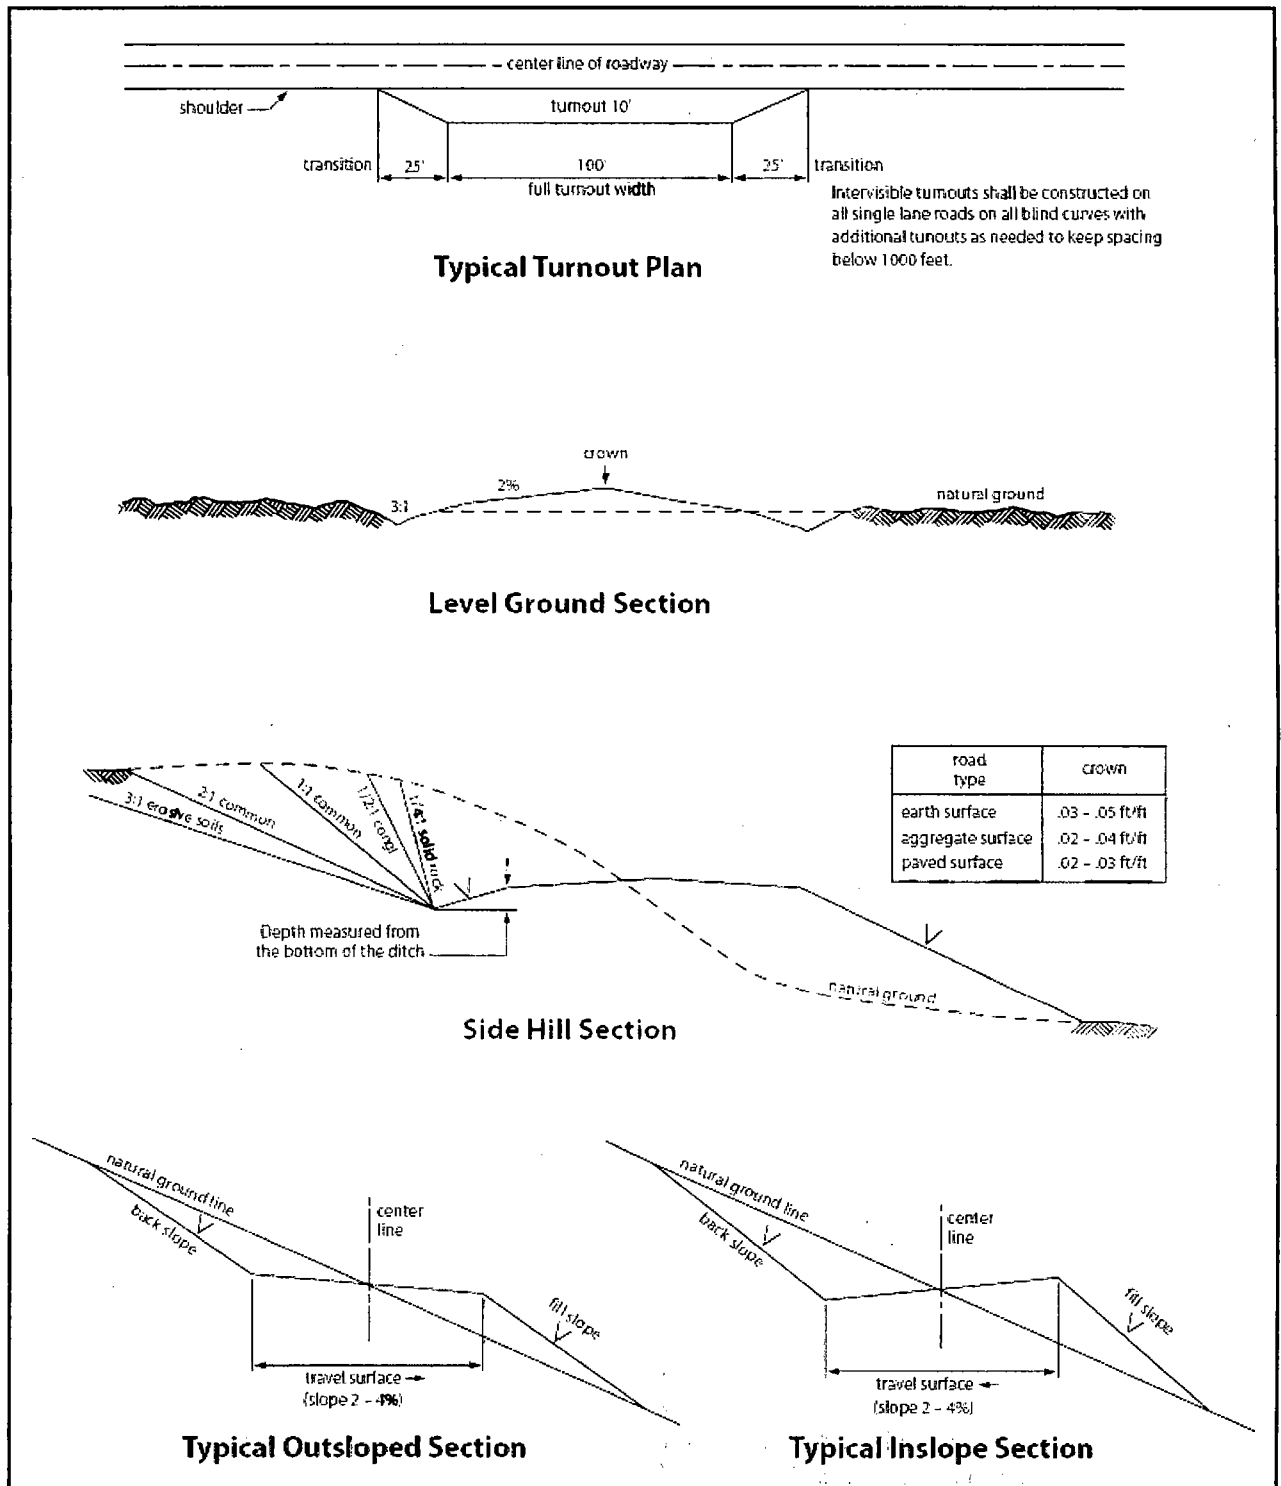


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

VIII. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

IX. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Below Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well.

Seed Mixture for LPC Sand/Shinnery Sites

Holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed shall be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed shall be either certified or registered seed. The seed container shall be tagged in accordance with State law(s) and available for inspection by the Authorized Officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). Holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. Seeding shall be repeated until a satisfactory stand is established as determined by the Authorized Officer. Evaluation of growth may not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Plains Bristlegrass	5lbs/A
Sand Bluestem	5lbs/A
Little Bluestem	3lbs/A
Big Bluestem	6lbs/A
Plains Coreopsis	2lbs/A
Sand Dropseed	1lbs/A

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed

COG OPERATING LLC
HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

1. HYDROGEN SULFIDE TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

- a. The hazards and characteristics of hydrogen sulfide (H₂S).
- b. The proper use and maintenance of personal protective equipment and life support systems.
- c. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
- d. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

- a. The effects of H₂S on metal components. If high tensile tubulars are to be used, personnel will be trained in their special maintenance requirements.
- b. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
- c. The contents and requirements of the H₂S Drilling Operations Plan and the Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500 feet) and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received the proper training.

2. H₂S SAFETY EQUIPMENT AND SYSTEMS

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H₂S. If H₂S greater than 100 ppm is encountered in the gas stream we will shut in and install H₂S equipment.

- a. Well Control Equipment:
 - Flare line.
 - Choke manifold with remotely operated choke.
 - Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit.
 - Auxiliary equipment to include: annular preventer, mud-gas separator, rotating head.

Casing Program

Hole Size	Casing Interval		Csg. Size.	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Body
	From	To							
13.5"	0	975	10.75"	45.5	N80	BTC	5.54	1.20	23.44
9.875"	0	11750	7.625"	29.7	P110	BTC	1.29	1.11	3.11
6.75"	0	11250	5.5"	23	P110	BTC	1.95	2.04	3.25
6.75"	11250	17,212	5"	18	P110	BTC	1.95	2.04	3.25
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Surface burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface and
All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

The 5" casing will be run back 500' into the intermediate casing to ensure the coupling OD clearance is greater than .422" for the cement bond tie in.

- b. Protective equipment for essential personnel:
Mark II Surviveair 30-minute units located in the dog house and at briefing areas.
- c. H2S detection and monitoring equipment:
2 - portable H2S monitor positioned on location for best coverage and response. These units have warning lights and audible sirens when H2S levels of 20 ppm are reached.
- d. Visual warning systems:
Caution/Danger signs shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used, when appropriate. See example attached.
- e. Mud Program:
The mud program has been designed to minimize the volume of H2S circulated to the surface.
- f. Metallurgy:
All drill strings, casings, tubing, wellhead, blowout preventers, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service.
- g. Communication:
Company vehicles equipped with cellular telephone.

COG OPERATING LLC has conducted a review to determine if an H2S contingency plan is required for the above referenced well. We were able to conclude that any potential hazardous volume would be minimal. H2S concentrations of wells in this area from surface to TD are low enough; therefore, we do not believe that an H2S contingency plan is necessary.

W A R N I N G

**YOU ARE ENTERING AN H₂S AREA
AUTHORIZED PERSONNEL ONLY**

- 1. BEARDS OR CONTACT LENSES NOT ALLOWED***
- 2. HARD HATS REQUIRED***
- 3. SMOKING IN DESIGNATED AREAS ONLY***
- 4. BE WIND CONSCIOUS AT ALL TIMES***
- 5. CK WITH COG OPERATING LLC FOREMAN AT MAIN OFFICE***

COG OPERATING LLC

1-575-748-6940

EMERGENCY CALL LIST

	<u>OFFICE</u>	<u>MOBILE</u>
COG OPERATING LLC OFFICE	575-748-6940	
SETH WILD	432-683-7443	432-528-3633
WALTER ROYE	575-748-6940	432-934-1886

EMERGENCY RESPONSE NUMBERS

	<u>OFFICE</u>
STATE POLICE	575-748-9718
EDDY COUNTY SHERIFF	575-746-2701
EMERGENCY MEDICAL SERVICES (AMBULANCE)	911 or 575-746-2701
EDDY COUNTY EMERGENCY MANAGEMENT (HARRY BURGESS)	575-887-9511
STATE EMERGENCY RESPONSE CENTER (SERC)	575-476-9620
CARLSBAD POLICE DEPARTMENT	575-885-2111
CARLSBAD FIRE DEPARTMENT	575-885-3125
NEW MEXICO OIL CONSERVATION DIVISION	575-748-1283
INDIAN FIRE & SAFETY	800-530-8693
HALLIBURTON SERVICES	800-844-8451



C O N C H O

COG Operating L L C

Lea County, NM (NAD27 NME)

Sec. 3, T 26 S. , R 35 E

Hennin Federal 12H

Wellbore #1

Plan #1

Anticollision Report

15 August, 2017





Integrity Directional Services, LLC

Anticollision Report



Company:	COG Operating LLC	Local Co-ordinate Reference:	Well Hennin Federal 12H
Project:	Lea County, NM (NAD27 NME)	TVD Reference:	KB=26 @ 3196.00ft
Reference Site:	Sec. 3, T 26 S., R 35 E	MD Reference:	KB=26 @ 3196.00ft
Site Error:	0.00 ft	North Reference:	Grid
Reference Well:	Hennin Federal 12H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at:	2.00 sigma
Reference Wellbore:	Wellbore #1	Database:	EDM 5000.1 Multi User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Reference:	Plan #1		
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria		
Interpolation Method:	MD + Stations Interval 100.00ft	Error Model:	ISCWSA
Depth Range:	Unlimited	Scan Method:	Closest Approach 3D
Results Limited by:	Maximum center-center distance of 10,000.00 ft	Error Surface:	Circular Conic
Warning Levels Evaluated at:	2.00 Sigma	Casing Method:	Not applied

Survey Tool Program		Date: 8/15/2017		
From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description
0.00	17,212.07	Plan #1 (Wellbore #1)	MWD	MWD - Standard

Site Name	Reference Measured Depth (ft)	Offset Measured Depth (ft)	Distance Between Centres (ft)	Distance Between Ellipses (ft)	Separation Factor	Warning
Sec. 3, T 26 S., R 35 E						
Hennin Federal 24H - Wellbore #1 - Plan #1	6,466.43	6,467.13	30.10	1.31	1.046	Level 2, CC
Hennin Federal 24H - Wellbore #1 - Plan #1	6,500.00	6,500.70	30.10	1.16	1.040	Level 2, ES, SF

Sec. 3, T 26 S., R 35 E - Hennin Federal 24H - Wellbore #1 - Plan #1												Offset Site Error	2.000
Survey Program: 0-MWD												Offset Well Error	0.000
Reference		Offset		Semi-Major Axis		Highside Toolface	Offset Wellbore Centre		Distance		Minimum Separation	Separation Factor	Warning
Measured Vertical Depth (ft)	Vertical Depth (ft)	Measured Vertical Depth (ft)	Vertical Depth (ft)	Reference	Offset		N/S	E/W	Between Centres (ft)	Ellipses (ft)			
0.00	0.00	0.70	0.70	0.00	0.00	-90.57	-0.30	-30.10	30.10				
100.00	100.00	100.70	100.70	0.08	0.08	-90.57	-0.30	-30.10	30.10	29.93	0.17	179.282	
200.00	200.00	200.70	200.70	0.31	0.31	-90.57	-0.30	-30.10	30.10	29.48	0.62	48.753	
300.00	300.00	300.70	300.70	0.53	0.53	-90.57	-0.30	-30.10	30.10	29.03	1.07	28.212	
400.00	400.00	400.70	400.70	0.76	0.76	-90.57	-0.30	-30.10	30.10	28.59	1.52	19.849	
500.00	500.00	500.70	500.70	0.98	0.98	-90.57	-0.30	-30.10	30.10	28.14	1.97	15.311	
600.00	600.00	600.70	600.70	1.21	1.21	-90.57	-0.30	-30.10	30.10	27.69	2.42	12.462	
700.00	700.00	700.70	700.70	1.43	1.43	-90.57	-0.30	-30.10	30.10	27.24	2.87	10.506	
800.00	800.00	800.70	800.70	1.66	1.66	-90.57	-0.30	-30.10	30.10	26.79	3.31	9.081	
900.00	900.00	900.70	900.70	1.88	1.88	-90.57	-0.30	-30.10	30.10	26.34	3.76	7.997	
1,000.00	1,000.00	1,000.70	1,000.70	2.11	2.11	-90.57	-0.30	-30.10	30.10	25.89	4.21	7.144	
1,100.00	1,100.00	1,100.70	1,100.70	2.33	2.33	-90.57	-0.30	-30.10	30.10	25.44	4.66	6.455	
1,200.00	1,200.00	1,200.70	1,200.70	2.56	2.56	-90.57	-0.30	-30.10	30.10	24.99	5.11	5.888	
1,300.00	1,300.00	1,300.70	1,300.70	2.78	2.78	-90.57	-0.30	-30.10	30.10	24.54	5.56	5.412	
1,400.00	1,400.00	1,400.70	1,400.70	3.01	3.01	-90.57	-0.30	-30.10	30.10	24.09	6.01	5.007	
1,500.00	1,500.00	1,500.70	1,500.70	3.23	3.23	-90.57	-0.30	-30.10	30.10	23.64	6.46	4.659	
1,600.00	1,600.00	1,600.70	1,600.70	3.45	3.46	-90.57	-0.30	-30.10	30.10	23.19	6.91	4.356	
1,700.00	1,700.00	1,700.70	1,700.70	3.68	3.68	-90.57	-0.30	-30.10	30.10	22.74	7.36	4.090	
1,800.00	1,800.00	1,800.70	1,800.70	3.90	3.91	-90.57	-0.30	-30.10	30.10	22.29	7.81	3.854	
1,900.00	1,900.00	1,900.70	1,900.70	4.13	4.13	-90.57	-0.30	-30.10	30.10	21.84	8.26	3.644	
2,000.00	2,000.00	2,000.70	2,000.70	4.35	4.36	-90.57	-0.30	-30.10	30.10	21.39	8.71	3.456	
2,100.00	2,100.00	2,100.70	2,100.70	4.58	4.58	-90.57	-0.30	-30.10	30.10	20.94	9.16	3.287	
2,200.00	2,200.00	2,200.70	2,200.70	4.80	4.80	-90.57	-0.30	-30.10	30.10	20.49	9.61	3.133	
2,300.00	2,300.00	2,300.70	2,300.70	5.03	5.03	-90.57	-0.30	-30.10	30.10	20.04	10.06	2.993	
2,400.00	2,400.00	2,400.70	2,400.70	5.25	5.25	-90.57	-0.30	-30.10	30.10	19.59	10.51	2.865	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Integrity Directional Services, LLC
Anticollision Report



Company:	COG Operating L L C	Local Co-ordinate Reference:	Well Hennin Federal 12H
Project:	Lea County, NM (NAD27 NME)	TVDR eference:	KB=26 @ 3196.00ft
Reference Site:	Sec. 3, T 26 S., R 35 E	MD Reference:	KB=26 @ 3196.00ft
Site Error:	0.00 ft	North Reference:	Grid
Reference Well:	Hennin Federal 12H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at:	2.00 sigma
Reference Wellbore:	Wellbore #1	Database:	EDM 5000.1 Multi User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Offset Design: Sec. 3, T 26 S., R 35 E - Hennin Federal 24H - Wellbore #1 - Plan #1													Offset Site Error: 0.00 ft	
Survey Program: 0-MWD													Offset Well Error: 0.00 ft	
Reference		Offset		Semi-Major Axis		Highside Toolface	Offset Wellbore Centre		Distance		Minimum Separation	Warning		
Measured Depth	Vertical Depth	Measured Depth	Vertical Depth	Reference	Offset		N/S	E/W	Between Centres	Between Ellipses				
(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)	(ft)			
2,500.00	2,500.00	2,500.70	2,500.70	5.48	5.48	-90.57	-0.30	-30.10	30.10	19.14	10.96	2.747		
2,600.00	2,600.00	2,600.70	2,600.70	5.70	5.70	-90.57	-0.30	-30.10	30.10	18.70	11.41	2.639		
2,700.00	2,700.00	2,700.70	2,700.70	5.93	5.93	-90.57	-0.30	-30.10	30.10	18.25	11.86	2.539		
2,800.00	2,800.00	2,800.70	2,800.70	6.15	6.15	-90.57	-0.30	-30.10	30.10	17.80	12.31	2.446		
2,900.00	2,900.00	2,900.70	2,900.70	6.38	6.38	-90.57	-0.30	-30.10	30.10	17.35	12.75	2.360		
3,000.00	3,000.00	3,000.70	3,000.70	6.60	6.60	-90.57	-0.30	-30.10	30.10	16.90	13.20	2.280		
3,100.00	3,100.00	3,100.70	3,100.70	6.83	6.83	-90.57	-0.30	-30.10	30.10	16.45	13.65	2.205		
3,200.00	3,200.00	3,200.70	3,200.70	7.05	7.05	-90.57	-0.30	-30.10	30.10	16.00	14.10	2.134		
3,300.00	3,300.00	3,300.70	3,300.70	7.28	7.28	-90.57	-0.30	-30.10	30.10	15.55	14.55	2.068		
3,400.00	3,400.00	3,400.70	3,400.70	7.50	7.50	-90.57	-0.30	-30.10	30.10	15.10	15.00	2.006		
3,500.00	3,500.00	3,500.70	3,500.70	7.73	7.73	-90.57	-0.30	-30.10	30.10	14.65	15.45	1.948		
3,600.00	3,600.00	3,600.70	3,600.70	7.95	7.95	-90.57	-0.30	-30.10	30.10	14.20	15.90	1.893		
3,700.00	3,700.00	3,700.70	3,700.70	8.17	8.18	-90.57	-0.30	-30.10	30.10	13.75	16.35	1.841		
3,800.00	3,800.00	3,800.70	3,800.70	8.40	8.40	-90.57	-0.30	-30.10	30.10	13.30	16.80	1.792		
3,900.00	3,900.00	3,900.70	3,900.70	8.62	8.63	-90.57	-0.30	-30.10	30.10	12.85	17.25	1.745		
4,000.00	4,000.00	4,000.70	4,000.70	8.85	8.85	-90.57	-0.30	-30.10	30.10	12.40	17.70	1.701		
4,100.00	4,100.00	4,100.70	4,100.70	9.07	9.08	-90.57	-0.30	-30.10	30.10	11.95	18.15	1.659		
4,200.00	4,200.00	4,200.70	4,200.70	9.30	9.30	-90.57	-0.30	-30.10	30.10	11.50	18.60	1.618		
4,300.00	4,300.00	4,300.70	4,300.70	9.52	9.52	-90.57	-0.30	-30.10	30.10	11.05	19.05	1.580		
4,400.00	4,400.00	4,400.70	4,400.70	9.75	9.75	-90.57	-0.30	-30.10	30.10	10.60	19.50	1.544		
4,500.00	4,500.00	4,500.70	4,500.70	9.97	9.97	-90.57	-0.30	-30.10	30.10	10.15	19.95	1.509		
4,600.00	4,600.00	4,600.70	4,600.70	10.20	10.20	-90.57	-0.30	-30.10	30.10	9.70	20.40	1.476 Level 3		
4,700.00	4,700.00	4,700.70	4,700.70	10.42	10.42	-90.57	-0.30	-30.10	30.10	9.26	20.85	1.444 Level 3		
4,800.00	4,800.00	4,800.70	4,800.70	10.65	10.65	-90.57	-0.30	-30.10	30.10	8.81	21.30	1.413 Level 3		
4,900.00	4,900.00	4,900.70	4,900.70	10.87	10.87	-90.57	-0.30	-30.10	30.10	8.36	21.75	1.384 Level 3		
5,000.00	5,000.00	5,000.70	5,000.70	11.10	11.10	-90.57	-0.30	-30.10	30.10	7.91	22.19	1.356 Level 3		
5,100.00	5,100.00	5,100.70	5,100.70	11.32	11.32	-90.57	-0.30	-30.10	30.10	7.46	22.64	1.329 Level 3		
5,200.00	5,200.00	5,200.70	5,200.70	11.55	11.55	-90.57	-0.30	-30.10	30.10	7.01	23.09	1.303 Level 3		
5,300.00	5,300.00	5,300.70	5,300.70	11.77	11.77	-90.57	-0.30	-30.10	30.10	6.56	23.54	1.279 Level 3		
5,400.00	5,400.00	5,400.70	5,400.70	12.00	12.00	-90.57	-0.30	-30.10	30.10	6.11	23.99	1.255 Level 3		
5,500.00	5,500.00	5,500.70	5,500.70	12.22	12.22	-90.57	-0.30	-30.10	30.10	5.66	24.44	1.232 Level 2		
5,600.00	5,600.00	5,600.70	5,600.70	12.45	12.45	-90.57	-0.30	-30.10	30.10	5.21	24.89	1.209 Level 2		
5,700.00	5,700.00	5,700.70	5,700.70	12.67	12.67	-90.57	-0.30	-30.10	30.10	4.76	25.34	1.188 Level 2		
5,800.00	5,800.00	5,800.70	5,800.70	12.89	12.90	-90.57	-0.30	-30.10	30.10	4.31	25.79	1.167 Level 2		
5,900.00	5,900.00	5,900.70	5,900.70	13.12	13.12	-90.57	-0.30	-30.10	30.10	3.86	26.24	1.147 Level 2		
6,000.00	6,000.00	6,000.70	6,000.70	13.34	13.35	-90.57	-0.30	-30.10	30.10	3.41	26.69	1.128 Level 2		
6,100.00	6,100.00	6,100.70	6,100.70	13.57	13.57	-90.57	-0.30	-30.10	30.10	2.96	27.14	1.109 Level 2		
6,200.00	6,200.00	6,200.70	6,200.70	13.79	13.80	-90.57	-0.30	-30.10	30.10	2.51	27.59	1.091 Level 2		
6,300.00	6,300.00	6,300.70	6,300.70	14.02	14.02	-90.57	-0.30	-30.10	30.10	2.06	28.04	1.074 Level 2		
6,400.00	6,400.00	6,400.70	6,400.70	14.24	14.24	-90.57	-0.30	-30.10	30.10	1.61	28.49	1.057 Level 2		
6,466.43	6,466.43	6,467.13	6,467.13	14.39	14.39	-90.57	-0.30	-30.10	30.10	1.31	28.79	1.046 Level 2, CC		
6,500.00	6,500.00	6,500.70	6,500.70	14.47	14.47	-90.57	-0.30	-30.10	30.10	1.16	28.94	1.040 Level 2, ES, SF		
6,600.00	6,599.98	6,599.97	6,599.95	14.69	14.69	-131.27	1.02	-31.24	32.39	3.02	29.38	1.103 Level 2		
6,613.66	6,613.63	6,613.56	6,613.53	14.72	14.72	-131.26	1.39	-31.57	33.06	3.62	29.44	1.123 Level 2		
6,700.00	6,699.90	6,699.79	6,699.70	14.91	14.91	-131.44	3.83	-33.69	37.41	7.60	29.82	1.255 Level 3		
6,800.00	6,799.82	6,799.66	6,799.50	15.13	15.13	-131.60	6.65	-36.15	42.46	12.21	30.25	1.404 Level 3		
6,900.00	6,899.74	6,899.53	6,899.30	15.35	15.35	-131.73	9.47	-38.60	47.51	16.82	30.69	1.548		
7,000.00	6,999.67	6,999.40	6,999.10	15.57	15.57	-131.83	12.29	-41.05	52.56	21.43	31.13	1.688		
7,100.00	7,099.59	7,099.28	7,098.91	15.79	15.78	-131.92	15.10	-43.51	57.61	26.04	31.57	1.825		
7,200.00	7,199.51	7,199.15	7,198.71	16.01	16.00	-131.99	17.92	-45.96	62.66	30.65	32.01	1.957		
7,300.00	7,299.43	7,299.02	7,298.51	16.23	16.23	-132.05	20.74	-48.41	67.70	35.25	32.45	2.086		
7,400.00	7,399.35	7,398.89	7,398.31	16.45	16.45	-132.10	23.56	-50.87	72.75	39.86	32.89	2.212		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



CONCHO

Integrity Directional Services, LLC

Anticollision Report



Company:	COG Operating L L C	Local Co-ordinate Reference:	Well Hennin Federal 12H
Project:	Lea County, NM (NAD27 NME)	TVD Reference:	KB=26 @ 3196.00ft
Reference Site:	Sec. 3, T 26 S., R 35 E	MD Reference:	KB=26 @ 3196.00ft
Site Error:	0.00 ft	North Reference:	Grid
Reference Well:	Hennin Federal 12H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at:	2.00 sigma
Reference Wellbore:	Wellbore #1	Database:	EDM 5000.1 Multi User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Offset Design: Sec. 3, T 26 S., R 35 E - Hennin Federal 24H - Wellbore #1 - Plan #1														Offset Site Error:
Survey Program: 0-MWD														Offset Well Error:
Reference	Offset	Reference	Offset	Reference	Offset	Reference	Offset	Reference	Offset	Reference	Offset	Reference	Offset	
Measured Depth (ft)	Vertical Depth (ft)	Measured Depth (ft)	Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (ft)	Offset Wellbore Centre (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning		
7,500.00	7,499.27	7,498.77	7,498.12	16.67	16.67	-132.15	26.38	-53.32	77.80	44.47	33.34	2.334		
7,600.00	7,599.19	7,598.64	7,597.92	16.89	16.89	-132.19	29.20	-55.77	82.85	49.07	33.78	2.453		
7,700.00	7,699.12	7,698.51	7,697.72	17.11	17.11	-132.22	32.02	-58.23	87.90	53.68	34.22	2.569		
7,800.00	7,799.04	7,798.38	7,797.52	17.33	17.33	-132.26	34.84	-60.68	92.95	58.28	34.67	2.681		
7,900.00	7,898.96	7,898.26	7,897.33	17.56	17.55	-132.28	37.66	-63.14	98.00	62.89	35.11	2.791		
8,000.00	7,998.88	7,998.13	7,997.13	17.78	17.78	-132.31	40.48	-65.59	103.05	67.49	35.56	2.898		
8,100.00	8,098.80	8,098.00	8,096.93	18.00	18.00	-132.33	43.30	-68.04	108.10	72.09	36.00	3.003		
8,200.00	8,198.72	8,197.87	8,196.73	18.23	18.22	-132.35	46.12	-70.50	113.14	76.70	36.45	3.104		
8,300.00	8,298.64	8,297.75	8,296.54	18.45	18.45	-132.37	48.94	-72.95	118.19	81.30	36.89	3.204		
8,400.00	8,398.56	8,397.62	8,396.34	18.67	18.67	-132.39	51.76	-75.40	123.24	85.90	37.34	3.300		
8,500.00	8,498.49	8,497.49	8,496.14	18.90	18.89	-132.41	54.58	-77.86	128.29	90.50	37.79	3.395		
8,600.00	8,598.41	8,597.36	8,595.94	19.12	19.12	-132.42	57.40	-80.31	133.34	95.10	38.24	3.487		
8,700.00	8,698.33	8,697.24	8,695.75	19.35	19.34	-132.44	60.22	-82.77	138.39	99.70	38.69	3.577		
8,800.00	8,798.25	8,797.11	8,795.55	19.57	19.57	-132.45	63.04	-85.22	143.44	104.30	39.14	3.665		
8,900.00	8,898.17	8,896.98	8,895.35	19.80	19.79	-132.46	65.86	-87.67	148.49	108.90	39.58	3.751		
9,000.00	8,998.09	8,996.85	8,995.15	20.02	20.01	-132.47	68.68	-90.13	153.54	113.50	40.03	3.835		
9,100.00	9,098.01	9,096.72	9,094.96	20.25	20.24	-132.48	71.50	-92.58	158.59	118.10	40.49	3.917		
9,200.00	9,197.94	9,196.60	9,194.76	20.47	20.46	-132.49	74.32	-95.03	163.63	122.70	40.94	3.997		
9,300.00	9,297.86	9,296.47	9,294.56	20.70	20.69	-132.50	77.14	-97.49	168.68	127.30	41.39	4.076		
9,400.00	9,397.78	9,396.34	9,394.36	20.92	20.92	-132.51	79.96	-99.94	173.73	131.89	41.84	4.152		
9,500.00	9,497.70	9,496.21	9,494.17	21.15	21.14	-132.52	82.77	-102.40	178.78	136.49	42.29	4.228		
9,600.00	9,597.62	9,596.09	9,593.97	21.38	21.37	-132.53	85.59	-104.85	183.83	141.09	42.74	4.301		
9,700.00	9,697.54	9,695.96	9,693.77	21.60	21.59	-132.54	88.41	-107.30	188.88	145.69	43.19	4.373		
9,800.00	9,797.46	9,795.83	9,793.57	21.83	21.82	-132.54	91.23	-109.76	193.93	150.28	43.65	4.443		
9,900.00	9,897.38	9,895.70	9,893.38	22.06	22.05	-132.55	94.05	-112.21	198.98	154.88	44.10	4.512		
10,000.00	9,997.31	9,995.58	9,993.18	22.28	22.27	-132.56	96.87	-114.66	204.03	159.47	44.55	4.579		
10,100.00	10,097.23	10,095.45	10,092.98	22.51	22.50	-132.56	99.69	-117.12	209.08	164.07	45.01	4.645		
10,200.00	10,197.15	10,195.32	10,192.78	22.74	22.72	-132.57	102.51	-119.57	214.13	168.66	45.46	4.710		
10,300.00	10,297.07	10,295.19	10,292.59	22.96	22.95	-132.57	105.33	-122.03	219.17	173.26	45.92	4.773		
10,400.00	10,396.99	10,395.07	10,392.39	23.19	23.18	-132.58	108.15	-124.48	224.22	177.85	46.37	4.836		
10,500.00	10,496.91	10,494.94	10,492.19	23.42	23.41	-132.58	110.97	-126.93	229.27	182.45	46.82	4.896		
10,600.00	10,596.83	10,594.81	10,591.99	23.65	23.63	-132.59	113.79	-129.39	234.32	187.04	47.28	4.956		
10,700.00	10,696.75	10,694.68	10,691.80	23.88	23.86	-132.59	116.61	-131.84	239.37	191.64	47.74	5.015		
10,800.00	10,796.68	10,794.56	10,791.60	24.10	24.09	-132.60	119.43	-134.29	244.42	196.23	48.19	5.072		
10,900.00	10,896.60	10,894.43	10,891.40	24.33	24.31	-132.60	122.25	-136.75	249.47	200.82	48.65	5.128		
11,000.00	10,996.52	10,994.30	10,991.20	24.56	24.54	-132.60	125.07	-139.20	254.52	205.42	49.10	5.183		
11,100.00	11,096.44	11,094.17	11,091.01	24.79	24.77	-132.61	127.89	-141.66	259.57	210.01	49.56	5.238		
11,200.00	11,196.36	11,194.05	11,190.81	25.02	25.00	-132.61	130.71	-144.11	264.62	214.60	50.01	5.291		
11,300.00	11,296.28	11,293.92	11,290.61	25.25	25.23	-132.62	133.53	-146.56	269.67	219.19	50.47	5.343		
11,400.00	11,396.20	11,393.79	11,390.41	25.47	25.45	-132.62	136.35	-149.02	274.71	223.79	50.93	5.394		
11,500.00	11,496.13	11,493.66	11,490.22	25.70	25.68	-132.62	139.17	-151.47	279.76	228.38	51.38	5.444		
11,600.00	11,596.05	11,593.54	11,590.02	25.93	25.91	-132.63	141.99	-153.92	284.81	232.97	51.84	5.494		
11,700.00	11,695.97	11,693.41	11,689.82	26.16	26.14	-132.63	144.81	-156.38	289.86	237.56	52.30	5.542		
11,800.00	11,795.89	11,793.28	11,789.62	26.39	26.37	-132.63	147.62	-158.83	294.91	242.15	52.76	5.590		
11,883.71	11,879.53	11,876.88	11,873.16	26.58	26.56	-132.63	149.98	-160.89	299.14	246.00	53.14	5.629		
11,900.00	11,895.82	11,893.15	11,889.42	26.61	26.60	169.27	150.44	-161.29	299.95	246.74	53.21	5.637		
11,925.00	11,920.79	11,918.07	11,914.33	26.66	26.65	113.57	151.15	-161.90	301.18	247.87	53.31	5.650		
11,950.00	11,945.70	11,942.88	11,939.12	26.70	26.71	102.67	151.85	-162.51	302.40	248.99	53.41	5.662		
11,975.00	11,970.46	11,967.52	11,963.73	26.74	26.77	99.00	152.54	-163.11	303.64	250.14	53.50	5.675		
12,000.00	11,995.01	11,991.90	11,988.10	26.77	26.82	97.61	153.23	-163.71	304.95	251.35	53.60	5.690		
12,025.00	12,019.28	12,015.97	12,012.16	26.81	26.88	97.28	153.91	-164.30	306.39	252.70	53.69	5.707		
12,050.00	12,043.21	12,039.66	12,035.83	26.84	26.93	97.56	154.58	-164.89	308.03	254.26	53.77	5.728		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Integrity Directional Services, LLC

Anticollision Report



Company:	COG Operating L L C	Local Co-ordinate Reference:	Well Hennin Federal 12H
Project:	Lea County, NM (NAD27 NME)	TVD Reference:	KB=26 @ 3196.00ft
Reference Site:	Sec. 3, T 26 S., R 35 E	MD Reference:	KB=26 @ 3196.00ft
Site Error:	0.00 ft	North Reference:	Grid
Reference Well:	Hennin Federal 12H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at:	2.00 sigma
Reference Wellbore:	Wellbore #1	Database:	EDM 5000.1 Multi User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Offset Design: Sec. 3, T 26 S., R 35 E - Hennin Federal 24H - Wellbore #1 - Plan #1														Offset Site Error:	0.00 ft
Survey Program: 0-MWD														Offset Well Error:	0.00 ft
Reference	Offset	Semi-Major Axis	Distance	Measured Vertical	Measured Vertical	Reference	Offset	Highside	Offset Wellbore Centre	Between	Between	Minimum	Separation	(Warning)	
Depth	Depth	Depth	Depth	Depth	Depth	Depth	Depth	Footcandle	N/S	E/W	Centres	Ellipses	Separation	Factor	
(m)	(m)	(m)	(m)	(m)	(m)	(m)	(m)	(m)	(m)	(m)	(m)	(m)	(m)		
12,075.00	12,066.73	12,062.91	12,059.06	26.88	26.98	98.24	155.24	-165.46	309.97	256.11	53.86	5.755			
12,100.00	12,089.77	12,085.65	12,081.79	26.91	27.04	99.18	155.88	-166.02	312.29	258.35	53.94	5.789			
12,125.00	12,112.28	12,107.82	12,103.94	26.94	27.09	100.31	156.50	-166.56	315.11	261.09	54.02	5.833			
12,150.00	12,134.19	12,129.36	12,125.46	26.97	27.14	101.54	157.11	-167.09	318.52	264.42	54.10	5.887			
12,175.00	12,155.44	12,150.21	12,146.30	26.99	27.18	102.82	157.70	-167.60	322.63	268.46	54.18	5.955			
12,200.00	12,175.97	12,175.18	12,171.27	27.02	27.23	104.52	157.75	-168.21	327.39	273.14	54.26	6.034			
12,225.00	12,195.73	12,201.12	12,197.16	27.05	27.28	106.24	156.42	-168.83	332.66	278.33	54.33	6.123			
12,250.00	12,214.66	12,228.14	12,224.01	27.08	27.32	107.96	153.54	-169.45	338.39	283.99	54.39	6.221			
12,275.00	12,232.71	12,256.35	12,251.83	27.10	27.36	109.68	148.92	-170.08	344.52	290.06	54.46	6.326			
12,300.00	12,249.84	12,285.92	12,280.64	27.13	27.40	111.39	142.32	-170.72	351.01	296.48	54.53	6.437			
12,325.00	12,265.98	12,316.99	12,310.41	27.15	27.45	113.11	133.48	-171.36	357.77	303.17	54.60	6.553			
12,350.00	12,281.11	12,349.74	12,341.10	27.18	27.49	114.81	122.08	-171.99	364.73	310.06	54.67	6.672			
12,375.00	12,295.17	12,384.35	12,372.61	27.21	27.53	116.50	107.78	-172.62	371.80	317.06	54.74	6.792			
12,400.00	12,308.14	12,421.02	12,404.76	27.24	27.57	118.17	90.19	-173.23	378.89	324.08	54.81	6.912			
12,425.00	12,319.97	12,459.94	12,437.31	27.27	27.62	119.81	68.87	-173.81	385.88	330.99	54.89	7.030			
12,450.00	12,330.63	12,501.30	12,469.87	27.32	27.66	121.39	43.39	-174.36	392.66	337.69	54.97	7.143			
12,475.00	12,340.09	12,545.26	12,501.93	27.36	27.70	122.90	13.34	-174.84	399.10	344.04	55.06	7.248			
12,500.00	12,348.33	12,591.92	12,532.77	27.42	27.74	124.32	-21.64	-175.25	405.07	349.91	55.16	7.344			
12,525.00	12,355.32	12,641.30	12,561.54	27.48	27.79	125.60	-61.75	-175.56	410.42	355.16	55.27	7.426			
12,550.00	12,361.05	12,693.30	12,587.18	27.54	27.85	126.72	-106.96	-175.75	415.02	359.62	55.39	7.492			
12,575.00	12,365.50	12,747.68	12,608.58	27.62	27.94	127.63	-156.92	-175.78	418.72	363.16	55.55	7.537			
12,600.00	12,368.66	12,804.02	12,624.61	27.70	28.06	128.30	-210.89	-175.64	421.40	365.64	55.76	7.557			
12,625.00	12,370.51	12,861.73	12,634.33	27.78	28.23	128.70	-267.75	-175.33	422.99	366.97	56.01	7.552			
12,640.42	12,371.00	12,897.72	12,636.90	27.84	28.35	128.80	-303.64	-175.04	423.38	367.19	56.19	7.535			
12,700.00	12,371.94	12,959.31	12,638.52	28.08	28.60	128.87	-365.20	-174.48	423.78	367.10	56.68	7.477			
12,800.00	12,373.51	13,059.30	12,641.14	28.57	29.07	128.98	-465.16	-173.57	424.44	366.79	57.65	7.363			
12,900.00	12,375.09	13,159.30	12,643.76	29.17	29.65	129.09	-565.11	-172.67	425.09	366.27	58.83	7.226			
13,000.00	12,376.66	13,259.29	12,646.38	29.87	30.33	129.20	-665.07	-171.76	425.76	365.55	60.20	7.072			
13,100.00	12,378.24	13,359.29	12,649.00	30.66	31.10	129.31	-765.02	-170.85	426.42	364.65	61.77	6.904			
13,200.00	12,379.81	13,459.28	12,651.62	31.54	31.96	129.42	-864.98	-169.94	427.08	363.58	63.50	6.726			
13,300.00	12,381.39	13,559.28	12,654.24	32.50	32.89	129.53	-964.94	-169.03	427.75	362.35	65.39	6.541			
13,400.00	12,382.96	13,659.27	12,656.86	33.53	33.90	129.64	-1,064.89	-168.12	428.41	360.99	67.43	6.354			
13,500.00	12,384.54	13,759.27	12,659.48	34.62	34.97	129.74	-1,164.85	-167.21	429.08	359.49	69.59	6.166			
13,600.00	12,386.11	13,859.26	12,662.10	35.78	36.10	129.85	-1,264.80	-166.31	429.75	357.87	71.88	5.979			
13,700.00	12,387.69	13,959.26	12,664.72	36.99	37.29	129.96	-1,364.76	-165.40	430.42	356.14	74.28	5.795			
13,800.00	12,389.26	14,059.25	12,667.34	38.24	38.53	130.06	-1,464.72	-164.49	431.09	354.32	76.77	5.615			
13,900.00	12,390.84	14,159.24	12,669.96	39.54	39.81	130.17	-1,564.67	-163.58	431.77	352.41	79.36	5.441			
14,000.00	12,392.41	14,259.24	12,672.58	40.88	41.14	130.28	-1,664.63	-162.67	432.44	350.42	82.02	5.272			
14,100.00	12,393.99	14,359.23	12,675.20	42.26	42.50	130.38	-1,764.59	-161.76	433.12	348.36	84.76	5.110			
14,200.00	12,395.56	14,459.23	12,677.82	43.67	43.89	130.49	-1,864.54	-160.85	433.80	346.23	87.56	4.954			
14,300.00	12,397.14	14,559.22	12,680.44	45.11	45.32	130.59	-1,964.50	-159.95	434.48	344.05	90.43	4.805			
14,400.00	12,398.71	14,659.22	12,683.06	46.58	46.77	130.70	-2,064.45	-159.04	435.16	341.81	93.35	4.662			
14,500.00	12,400.29	14,759.21	12,685.68	48.07	48.25	130.80	-2,164.41	-158.13	435.84	339.53	96.31	4.525			
14,600.00	12,401.86	14,859.21	12,688.30	49.58	49.75	130.90	-2,264.37	-157.22	436.52	337.20	99.33	4.395			
14,700.00	12,403.44	14,959.20	12,690.92	51.12	51.27	131.01	-2,364.32	-156.31	437.21	334.83	102.38	4.270			
14,800.00	12,405.01	15,059.20	12,693.54	52.67	52.81	131.11	-2,464.28	-155.40	437.90	332.42	105.48	4.152			
14,900.00	12,406.59	15,159.19	12,696.16	54.24	54.37	131.21	-2,564.23	-154.50	438.58	329.98	108.60	4.038			
15,000.00	12,408.16	15,259.18	12,698.78	55.82	55.94	131.32	-2,664.19	-153.59	439.27	327.51	111.76	3.930			
15,100.00	12,409.74	15,359.18	12,701.40	57.42	57.53	131.42	-2,764.15	-152.68	439.97	325.01	114.95	3.827			
15,200.00	12,411.31	15,459.17	12,704.02	59.03	59.13	131.52	-2,864.10	-151.77	440.66	322.49	118.17	3.729			
15,300.00	12,412.89	15,559.17	12,706.64	60.66	60.75	131.62	-2,964.06	-150.86	441.35	319.95	121.40	3.635			
15,400.00	12,414.46	15,659.16	12,709.26	62.29	62.37	131.72	-3,064.01	-149.95	442.05	317.38	124.67	3.546			

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation


Company:	COG Operating L L C	Local Co-ordinate Reference:	Well Hennin Federal 12H
Project:	Lea County, NM (NAD27 NME)	TVD Reference:	KB=26 @ 3196.00ft
Reference Site:	Sec. 3, T 26 S., R 35 E	MD Reference:	KB=26 @ 3196.00ft
Site Error:	0.00 ft	North Reference:	Grid
Reference Well:	Hennin Federal 12H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at:	2.00 sigma
Reference Wellbore:	Wellbore #1	Database:	EDM 5000.1 Multi User Db
Reference Design:	Plan #1	Offset TVD Reference:	Offset Datum

Offset Design: Sec. 3, T 26 S., R 35 E - Hennin Federal 24H - Wellbore #1 - Plan #1												Offset Site Error: 0.00 ft
Survey Program: 0-MWD												Offset Well Error: 0.00 ft
Reference:	Offset:	Semi-Major Axis:	Distance:									
Measured Vertical Depth (ft)	Measured Vertical Depth (ft)	Measured Vertical Depth (ft)	Measured Vertical Depth (ft)	Reference (ft)	Offset (ft)	Highside Toolface (ft)	Offset Wellbore Centre (ft)	Between Centres (ft)	Between Ellipses (ft)	Minimum Separation (ft)	Separation Factor	Warning
15,500.00	12,416.04	15,759.16	12,711.88	63.94	64.01	131.82	-3,163.97	-149.04	442.74	314.80	127.95	3.460
15,600.00	12,417.61	15,859.15	12,714.50	65.59	65.66	131.92	-3,263.93	-148.14	443.44	312.19	131.25	3.379
15,700.00	12,419.19	15,959.15	12,717.12	67.25	67.31	132.02	-3,363.88	-147.23	444.14	309.57	134.57	3.300
15,800.00	12,420.76	16,059.14	12,719.74	68.93	68.98	132.12	-3,463.84	-146.32	444.84	306.94	137.91	3.226
15,900.00	12,422.34	16,159.13	12,722.36	70.61	70.65	132.22	-3,563.79	-145.41	445.54	304.29	141.26	3.154
16,000.00	12,423.91	16,259.13	12,724.98	72.29	72.33	132.32	-3,663.75	-144.50	446.25	301.63	144.62	3.086
16,100.00	12,425.49	16,359.12	12,727.60	73.98	74.02	132.42	-3,763.71	-143.59	446.95	298.95	148.00	3.020
16,200.00	12,427.06	16,459.12	12,730.22	75.68	75.71	132.52	-3,863.66	-142.68	447.66	296.27	151.39	2.957
16,300.00	12,428.63	16,559.11	12,732.84	77.39	77.41	132.62	-3,963.62	-141.78	448.37	293.57	154.80	2.896
16,400.00	12,430.21	16,659.11	12,735.46	79.10	79.11	132.72	-4,063.58	-140.87	449.08	290.87	158.21	2.838
16,500.00	12,431.78	16,759.10	12,738.08	80.81	80.82	132.82	-4,163.53	-139.96	449.79	288.15	161.63	2.783
16,600.00	12,433.36	16,859.10	12,740.70	82.53	82.54	132.91	-4,263.49	-139.05	450.50	285.43	165.07	2.729
16,700.00	12,434.93	16,959.09	12,743.32	84.25	84.26	133.01	-4,363.44	-138.14	451.21	282.70	168.51	2.678
16,800.00	12,436.51	17,059.09	12,745.94	85.98	85.98	133.11	-4,463.40	-137.23	451.92	279.96	171.96	2.628
16,900.00	12,438.08	17,159.08	12,748.56	87.71	87.71	133.20	-4,563.36	-136.33	452.64	277.22	175.42	2.580
17,000.00	12,439.66	17,259.07	12,751.18	89.45	89.44	133.30	-4,663.31	-135.42	453.36	274.47	178.89	2.534
17,100.00	12,441.23	17,359.07	12,753.80	91.19	91.17	133.40	-4,763.27	-134.51	454.07	271.71	182.36	2.490
17,200.00	12,442.81	17,459.06	12,756.42	92.93	92.91	133.49	-4,863.22	-133.60	454.79	268.95	185.84	2.447
17,212.19	12,443.00	17,471.25	12,756.74	93.14	93.12	133.50	-4,875.40	-133.49	454.88	268.61	186.27	2.442
17,212.92	12,443.01	17,471.98	12,756.76	93.16	93.14	133.50	-4,876.14	-133.48	454.89	268.59	186.30	2.442

Company:	COG Operating L L C	Local Co-ordinate Reference:	Well Hennin Federal 12H
Project:	Lea County, NM (NAD27 NME)	I/V D Reference:	KB=26 @ 3196.00ft
Reference Site:	Sec. 3, T 26 S., R 35 E	MD Reference:	KB=26 @ 3196.00ft
Site Error:	0.00 ft	North Reference:	Grid
Reference Well:	Hennin Federal 12H	Survey/Calculation Method:	Minimum Curvature
Well Error:	0.00 ft	Output errors are at:	2.00 sigma
Reference Wellbore:	Wellbore #1	Database:	EDM 5000.1 Multi User Db
Reference Design:	Plan #1	Offset I/V D Reference:	Offset Datum

Reference Depths are relative to KB=26 @ 3196.00ft
 Offset Depths are relative to Offset Datum
 Central Meridian is -104.333334

Coordinates are relative to: Hennin Federal 12H
 Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 30
 Grid Convergence at Surface is: 0.52°

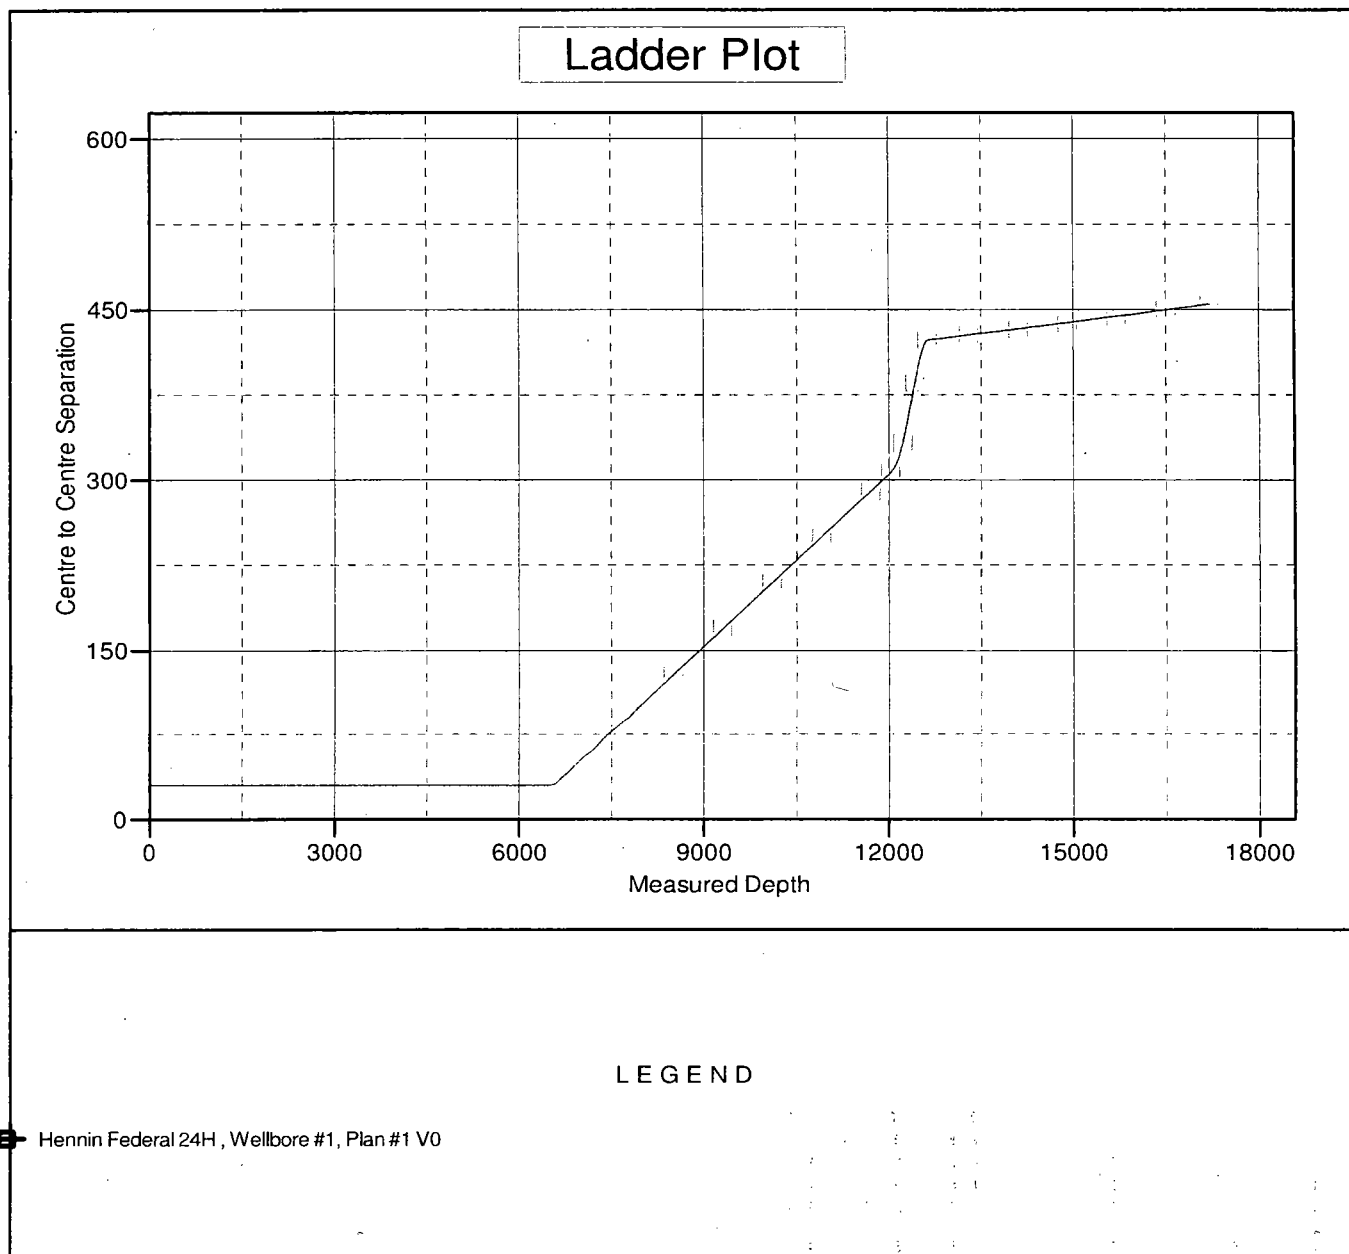


Company: COG Operating L L C
Project: Lea County, NM (NAD27 NME)
Reference Site: Sec. 3, T 26 S. , R 35 E
Site Error: 0.00 ft
Reference Well: Hennin Federal 12H
Well Error: 0.00 ft
Reference Wellbore: Wellbore #1
Reference Design: Plan #1

Local Co-ordinate Reference: Well Hennin Federal 12H
TVD Reference: KB=26 @ 3196.00ft
MD Reference: KB=26 @ 3196.00ft
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Multi User Db
Offset TVD Reference: Offset Datum


Reference Depths are relative to KB=26 @ 3196.00ft
 Offset Depths are relative to Offset Datum
 Central Meridian is -104.333334

Coordinates are relative to: Hennin Federal 12H
 Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 30
 Grid Convergence at Surface is: 0.52°

Separation Factor Plot

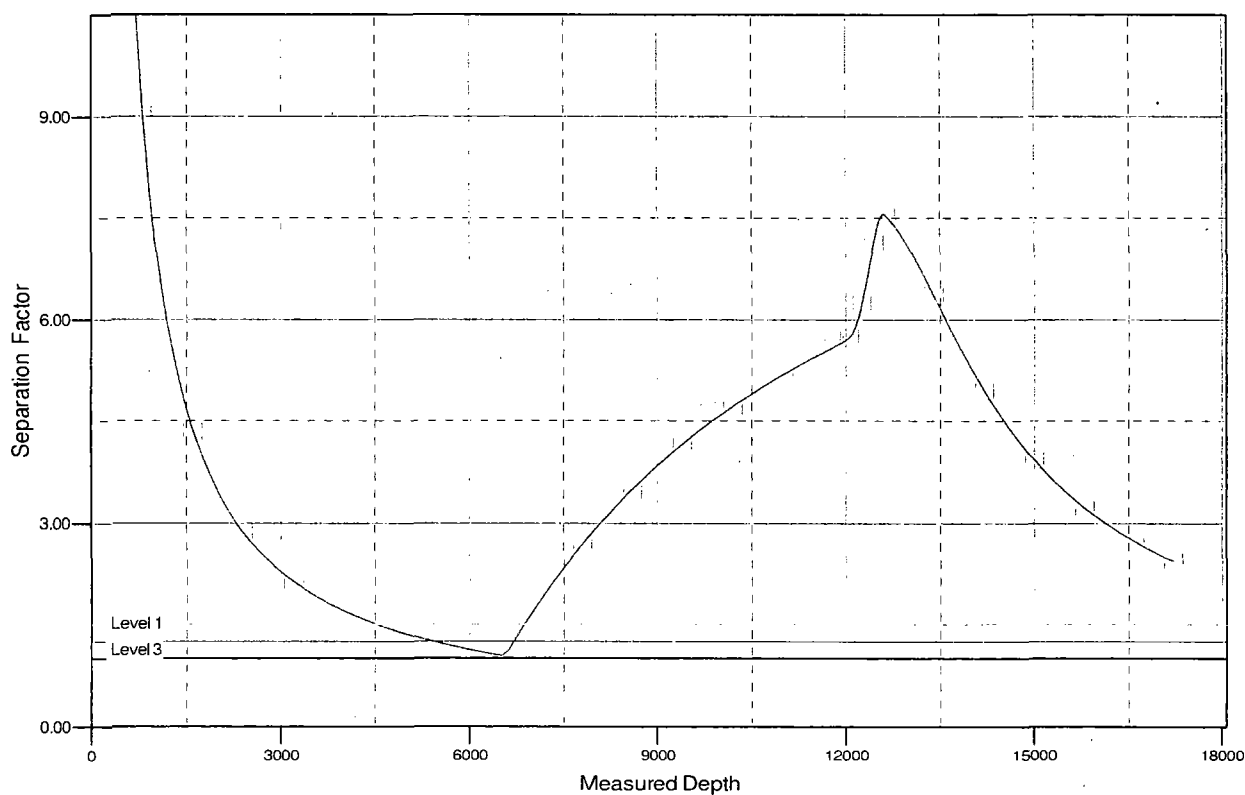

LEGEND

 Hennin Federal 24H , Wellbore #1, Plan #1 V0



COG Operating L L C
 Project: Lea County, NM (NAD27 NME)
 Site: Sec. 3, T 26 S., R 35 E
 Well: Hennin Federal 12H
 Wellbore: Wellbore #1
 Plan: Plan #1 (Hennin Federal 12H / Wellbore #1)









WELL DETAILS: Hennin Federal 12H

Ground Elevation:: 3170.00
 RKB Elevation: KB=26 @ 3196.00ft
 Rig Name:

Northing	Easting	Latitude	Longitude
393796.4000	803558.8000	32.078871	-103.353276

Planned Section Details

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2	6500.00	0.00	0.00	6500.00	0.00	0.00	0.00	0.00	0.00
3	6613.66	2.27	40.78	6613.63	1.71	1.47	2.00	40.78	-1.65
4	11883.71	2.27	40.78	11879.53	160.00	138.00	0.00	0.00	-154.32
5	12640.42	89.10	179.48	12371.00	-309.60	154.95	12.00	138.70	315.58
6	17212.19	89.10	179.48	12443.00	-4880.61	196.50	0.00	0.00	4884.56

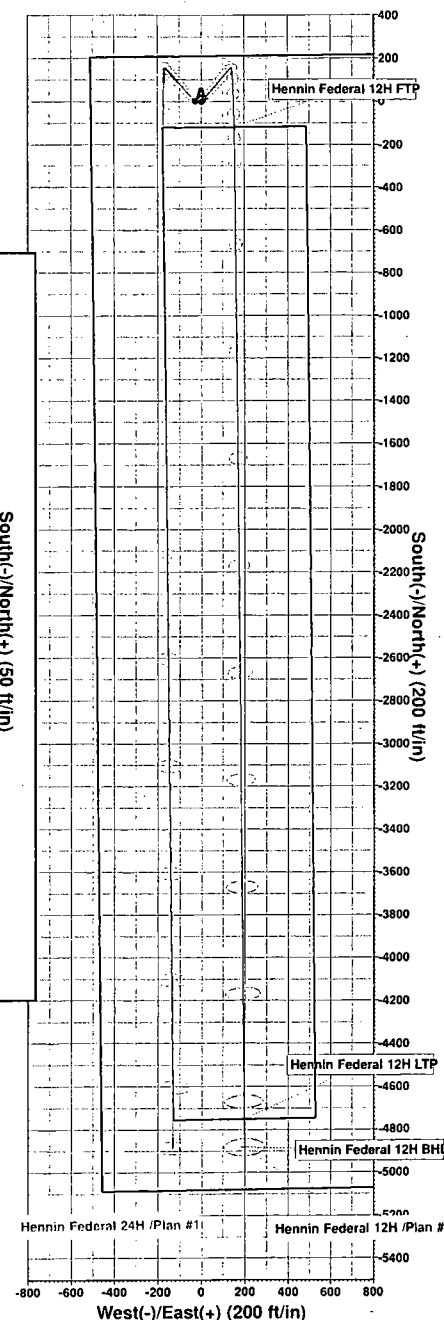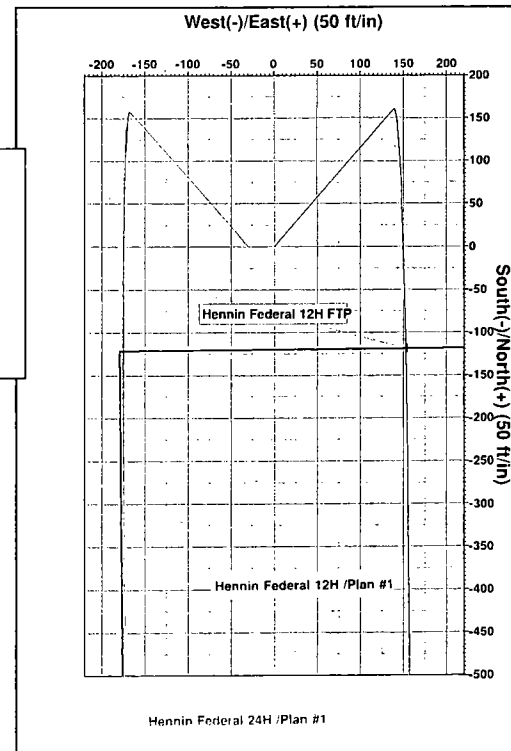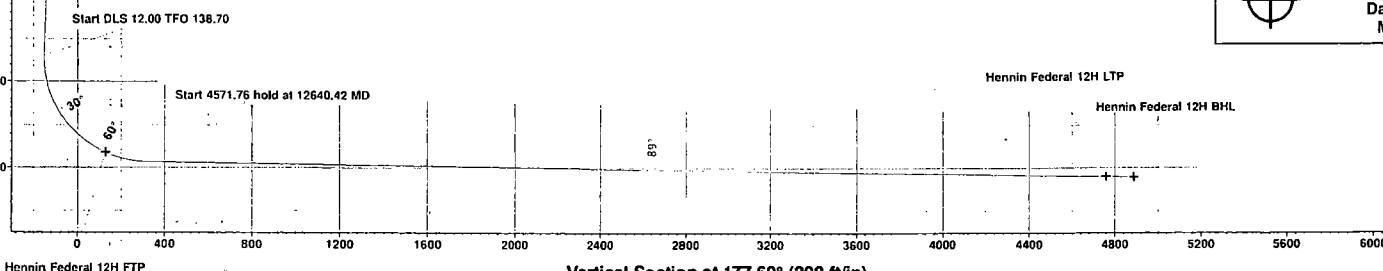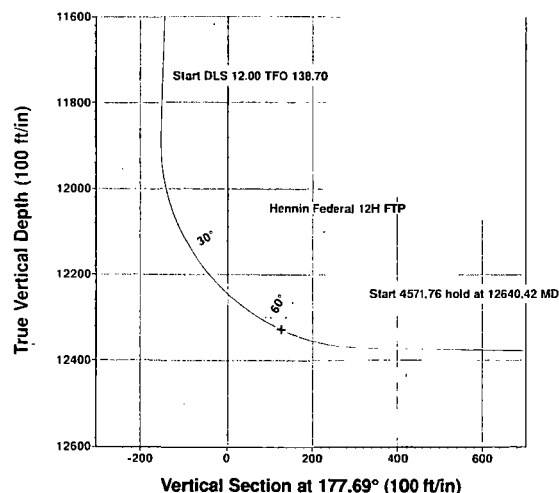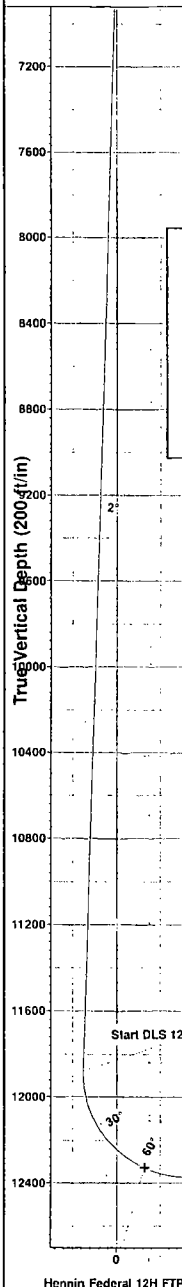

PROJECT DETAILS: Lea County, NM (NAD27 NME)
 Geodetic System: US State Plane 1927 (Exact solution)
 Datum: NAD 1927 (NADCON CONUS)
 Ellipsoid: Clarke 1866
 Zone: New Mexico East 3001
 System Datum: Mean Sea Level
 Local North: Grid



CONCHO

COG Operating L L C

Lea County, NM (NAD27 NME)

Sec. 3, T 26 S. , R 35 E

Hennin Federal 12H

Wellbore #1

Plan: Plan #1

Standard Survey Report

15 August, 2017





Integrity Directional Services, LLC

Survey Report



Company:	COG Operating L L C	Local Co-ordinate Reference:	Well Hennin Federal 12H
Project:	Lea County, NM (NAD27 NME)	TVD Reference:	KB=26 @ 3196.00ft
Site:	Sec. 3, T 26 S. , R 35 E	MD Reference:	KB=26 @ 3196.00ft
Well:	Hennin Federal 12H	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Plan #1	Database:	EDM 5000.1 Multi User Db

Project:	Lea County, NM (NAD27 NME)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site:	Sec. 3, T 26 S. , R 35 E		
Site Position:		Northing:	393,796.4000 usft
From:	Map	Easting:	803,558.8000 usft
Position Uncertainty:	0.00 ft	Slot Radius:	13-3/16 "
		Latitude:	32.078871
		Longitude:	-103.353276
		Grid Convergence:	0.52 °

Well:	Hennin Federal 12H		
Well Position	+N/-S	0.00 ft	Northing:
	+E/-W	0.00 ft	Easting:
Position Uncertainty	0.00 ft	Wellhead Elevation:	0.00 ft
		Latitude:	32.078871
		Longitude:	-103.353276
		Ground Level:	3,170.00 ft

Wellbore:	Wellbore #1		
Magnetics:	Model Name	Sample Date	Declination
	HDGM	8/15/2017	6.75
			Dip/Angle
			59.77
			Field Strength
			47,921

Design:	Plan #1		
Audit Notes:			
Version:	Phase:	PLAN	Tie On Depth:
			0.00
Vertical Section:	Depth From (TVD)	N/S	E/W
	(ft)	(ft)	(ft)
	0.00	0.00	0.00
			177.69

Survey Tool Program Date 8/15/2017

From	To	Survey (Wellbore)	Tool Name	Description
(ft)	(ft)			
0.00	17,212.07	Plan #1 (Wellbore #1)	MWD	MWD - Standard

Planned Survey									
Measured Depth	Inclination	Azimuth	Vertical Depth	N/S	E/W	Vertical Section	Dogleg Rate	Build Rate	Turn Rate
(ft)	(°)	(°)	(ft)	(ft)	(ft)	(ft)	(%/100usft)	(%/100usft)	(%/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00




Integrity Directional Services, LLC

Survey Report



Company:	COG Operating L L C	Local Co-ordinate Reference:	Well Hennin Federal 12H
Project:	Lea County, NM (NAD27 NME)	TVD Reference:	KB=26 @ 3196.00ft
Site:	Sec. 3, T 26 S., R 35 E	MD Reference:	KB=26 @ 3196.00ft
Well:	Hennin Federal 12H	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Plan #1	Database:	EDM 5000.1 Multi User Db

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.00	0.00	0.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,400.00	0.00	0.00	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,600.00	0.00	0.00	0.00	0.00	0.00	0.00
4,700.00	0.00	0.00	4,700.00	0.00	0.00	0.00	0.00	0.00	0.00
4,800.00	0.00	0.00	4,800.00	0.00	0.00	0.00	0.00	0.00	0.00
4,900.00	0.00	0.00	4,900.00	0.00	0.00	0.00	0.00	0.00	0.00
5,000.00	0.00	0.00	5,000.00	0.00	0.00	0.00	0.00	0.00	0.00
5,100.00	0.00	0.00	5,100.00	0.00	0.00	0.00	0.00	0.00	0.00
5,200.00	0.00	0.00	5,200.00	0.00	0.00	0.00	0.00	0.00	0.00
5,300.00	0.00	0.00	5,300.00	0.00	0.00	0.00	0.00	0.00	0.00



Integrity Directional Services, LLC

Survey Report



Company:	COG Operating L L C	Local Co-ordinate Reference:	Well Hennin Federal 12H
Project:	Lea County, NM (NAD27 NME)	TVD Reference:	KB=26 @ 3196.00ft
Site:	Sec. 3, T 26 S., R 35 E	MD Reference:	KB=26 @ 3196.00ft
Well:	Hennin Federal 12H	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Plan #1	Database:	EDM 5000.1 Multi User Db

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	N/S (ft)	E/W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,400.00	0.00	0.00	5,400.00	0.00	0.00	0.00	0.00	0.00	0.00
5,500.00	0.00	0.00	5,500.00	0.00	0.00	0.00	0.00	0.00	0.00
5,600.00	0.00	0.00	5,600.00	0.00	0.00	0.00	0.00	0.00	0.00
5,700.00	0.00	0.00	5,700.00	0.00	0.00	0.00	0.00	0.00	0.00
5,800.00	0.00	0.00	5,800.00	0.00	0.00	0.00	0.00	0.00	0.00
5,900.00	0.00	0.00	5,900.00	0.00	0.00	0.00	0.00	0.00	0.00
6,000.00	0.00	0.00	6,000.00	0.00	0.00	0.00	0.00	0.00	0.00
6,100.00	0.00	0.00	6,100.00	0.00	0.00	0.00	0.00	0.00	0.00
6,200.00	0.00	0.00	6,200.00	0.00	0.00	0.00	0.00	0.00	0.00
6,300.00	0.00	0.00	6,300.00	0.00	0.00	0.00	0.00	0.00	0.00
6,400.00	0.00	0.00	6,400.00	0.00	0.00	0.00	0.00	0.00	0.00
6,500.00	0.00	0.00	6,500.00	0.00	0.00	0.00	0.00	0.00	0.00
Start Build 2.00									
6,600.00	2.00	40.78	6,599.98	1.32	1.14	-1.27	2.00	2.00	0.00
6,613.66	2.27	40.78	6,613.63	1.71	1.47	-1.65	2.00	2.00	0.00
Start 5270.05 hold at 6613.66 MD									
6,700.00	2.27	40.78	6,699.90	4.30	3.71	-4.15	0.00	0.00	0.00
6,800.00	2.27	40.78	6,799.82	7.30	6.30	-7.04	0.00	0.00	0.00
6,900.00	2.27	40.78	6,899.74	10.31	8.89	-9.94	0.00	0.00	0.00
7,000.00	2.27	40.78	6,999.67	13.31	11.48	-12.84	0.00	0.00	0.00
7,100.00	2.27	40.78	7,099.59	16.32	14.07	-15.74	0.00	0.00	0.00
7,200.00	2.27	40.78	7,199.51	19.32	16.66	-18.63	0.00	0.00	0.00
7,300.00	2.27	40.78	7,299.43	22.32	19.25	-21.53	0.00	0.00	0.00
7,400.00	2.27	40.78	7,399.35	25.33	21.84	-24.43	0.00	0.00	0.00
7,500.00	2.27	40.78	7,499.27	28.33	24.43	-27.32	0.00	0.00	0.00
7,600.00	2.27	40.78	7,599.19	31.33	27.02	-30.22	0.00	0.00	0.00
7,700.00	2.27	40.78	7,699.12	34.34	29.62	-33.12	0.00	0.00	0.00
7,800.00	2.27	40.78	7,799.04	37.34	32.21	-36.01	0.00	0.00	0.00
7,900.00	2.27	40.78	7,898.96	40.34	34.80	-38.91	0.00	0.00	0.00
8,000.00	2.27	40.78	7,998.88	43.35	37.39	-41.81	0.00	0.00	0.00
8,100.00	2.27	40.78	8,098.80	46.35	39.98	-44.71	0.00	0.00	0.00
8,200.00	2.27	40.78	8,198.72	49.35	42.57	-47.60	0.00	0.00	0.00
8,300.00	2.27	40.78	8,298.64	52.36	45.16	-50.50	0.00	0.00	0.00
8,400.00	2.27	40.78	8,398.56	55.36	47.75	-53.40	0.00	0.00	0.00
8,500.00	2.27	40.78	8,498.49	58.37	50.34	-56.29	0.00	0.00	0.00
8,600.00	2.27	40.78	8,598.41	61.37	52.93	-59.19	0.00	0.00	0.00
8,700.00	2.27	40.78	8,698.33	64.37	55.52	-62.09	0.00	0.00	0.00
8,800.00	2.27	40.78	8,798.25	67.38	58.11	-64.98	0.00	0.00	0.00
8,900.00	2.27	40.78	8,898.17	70.38	60.70	-67.88	0.00	0.00	0.00
9,000.00	2.27	40.78	8,998.09	73.38	63.29	-70.78	0.00	0.00	0.00
9,100.00	2.27	40.78	9,098.01	76.39	65.88	-73.68	0.00	0.00	0.00
9,200.00	2.27	40.78	9,197.94	79.39	68.47	-76.57	0.00	0.00	0.00
9,300.00	2.27	40.78	9,297.86	82.39	71.07	-79.47	0.00	0.00	0.00



Company:	COG Operating L L C	Local Co-ordinate Reference:	Well Hennin Federal 12H
Project:	Lea County, NM (NAD27 NME)	IVD Reference:	KB=26 @ 3196.00ft
Site:	Sec. 3, T 26 S., R 35 E	MD Reference:	KB=26 @ 3196.00ft
Well:	Hennin Federal 12H	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Plan #1	Database:	EDM 5000.1 Multi User Db

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	N/S (ft)	E/W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,400.00	2.27	40.78	9,397.78	85.40	73.66	-82.37	0.00	0.00	0.00
9,500.00	2.27	40.78	9,497.70	88.40	76.25	-85.26	0.00	0.00	0.00
9,600.00	2.27	40.78	9,597.62	91.41	78.84	-88.16	0.00	0.00	0.00
9,700.00	2.27	40.78	9,697.54	94.41	81.43	-91.06	0.00	0.00	0.00
9,800.00	2.27	40.78	9,797.46	97.41	84.02	-93.95	0.00	0.00	0.00
9,900.00	2.27	40.78	9,897.38	100.42	86.61	-96.85	0.00	0.00	0.00
10,000.00	2.27	40.78	9,997.31	103.42	89.20	-99.75	0.00	0.00	0.00
10,100.00	2.27	40.78	10,097.23	106.42	91.79	-102.65	0.00	0.00	0.00
10,200.00	2.27	40.78	10,197.15	109.43	94.38	-105.54	0.00	0.00	0.00
10,300.00	2.27	40.78	10,297.07	112.43	96.97	-108.44	0.00	0.00	0.00
10,400.00	2.27	40.78	10,396.99	115.43	99.56	-111.34	0.00	0.00	0.00
10,500.00	2.27	40.78	10,496.91	118.44	102.15	-114.23	0.00	0.00	0.00
10,600.00	2.27	40.78	10,596.83	121.44	104.74	-117.13	0.00	0.00	0.00
10,700.00	2.27	40.78	10,696.75	124.45	107.33	-120.03	0.00	0.00	0.00
10,800.00	2.27	40.78	10,796.68	127.45	109.93	-122.92	0.00	0.00	0.00
10,900.00	2.27	40.78	10,896.60	130.45	112.52	-125.82	0.00	0.00	0.00
11,000.00	2.27	40.78	10,996.52	133.46	115.11	-128.72	0.00	0.00	0.00
11,100.00	2.27	40.78	11,096.44	136.46	117.70	-131.62	0.00	0.00	0.00
11,200.00	2.27	40.78	11,196.36	139.46	120.29	-134.51	0.00	0.00	0.00
11,300.00	2.27	40.78	11,296.28	142.47	122.88	-137.41	0.00	0.00	0.00
11,400.00	2.27	40.78	11,396.20	145.47	125.47	-140.31	0.00	0.00	0.00
11,500.00	2.27	40.78	11,496.13	148.47	128.06	-143.20	0.00	0.00	0.00
11,600.00	2.27	40.78	11,596.05	151.48	130.65	-146.10	0.00	0.00	0.00
11,700.00	2.27	40.78	11,695.97	154.48	133.24	-149.00	0.00	0.00	0.00
11,800.00	2.27	40.78	11,795.89	157.49	135.83	-151.89	0.00	0.00	0.00
11,883.71	2.27	40.78	11,879.53	160.00	138.00	-154.32	0.00	0.00	0.00
Start DLS 12.00 TFO 138.70									
11,900.00	1.52	98.85	11,895.82	160.21	138.42	-154.51	12.00	-4.62	356.43
12,000.00	12.34	172.63	11,995.01	149.37	141.12	-143.58	12.00	10.82	73.78
12,100.00	24.29	176.18	12,089.77	118.14	143.87	-112.26	12.00	11.95	3.55
12,200.00	36.27	177.46	12,175.97	67.88	146.56	-61.93	12.00	11.98	1.28
12,300.00	48.26	178.16	12,249.84	0.79	149.08	5.20	12.00	11.99	0.71
12,400.00	60.26	178.65	12,308.14	-80.20	151.31	86.22	12.00	11.99	0.48
12,443.41	65.46	178.82	12,327.93	-118.80	152.16	124.83	12.00	11.99	0.40
Hennin Federal 12H FTP									
12,500.00	72.25	179.02	12,348.33	-171.55	153.15	177.57	12.00	12.00	0.36
12,600.00	84.25	179.35	12,368.66	-269.26	154.53	275.26	12.00	12.00	0.33
12,640.42	89.10	179.48	12,371.00	-309.60	154.95	315.58	12.00	12.00	0.32
Start 4571.76 hold at 12640.42 MD									
12,700.00	89.10	179.48	12,371.94	-369.17	155.49	375.13	0.00	0.00	0.00
12,800.00	89.10	179.48	12,373.51	-469.15	156.40	475.07	0.00	0.00	0.00
12,900.00	89.10	179.48	12,375.09	-569.14	157.31	575.00	0.00	0.00	0.00
13,000.00	89.10	179.48	12,376.66	-669.12	158.21	674.94	0.00	0.00	0.00
13,100.00	89.10	179.48	12,378.24	-769.10	159.12	774.88	0.00	0.00	0.00

Company:	COG Operating L L C	Local Co-ordinate Reference:	Well Hennin Federal 12H
Project:	Lea County, NM (NAD27 NME)	TVD Reference:	KB=26 @ 3196.00ft
Site:	Sec. 3, T 26 S., R 35 E	MD Reference:	KB=26 @ 3196.00ft
Well:	Hennin Federal 12H	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Plan #1	Database:	EDM 5000.1 Multi User Db

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	N/S (ft)	E/W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
13,200.00	89.10	179.48	12,379.81	-869.09	160.03	874.82	0.00	0.00	0.00
13,300.00	89.10	179.48	12,381.39	-969.07	160.94	974.76	0.00	0.00	0.00
13,400.00	89.10	179.48	12,382.96	-1,069.05	161.85	1,074.70	0.00	0.00	0.00
13,500.00	89.10	179.48	12,384.54	-1,169.04	162.76	1,174.64	0.00	0.00	0.00
13,600.00	89.10	179.48	12,386.11	-1,269.02	163.67	1,274.58	0.00	0.00	0.00
13,700.00	89.10	179.48	12,387.69	-1,369.01	164.58	1,374.52	0.00	0.00	0.00
13,800.00	89.10	179.48	12,389.26	-1,468.99	165.49	1,474.46	0.00	0.00	0.00
13,900.00	89.10	179.48	12,390.84	-1,568.97	166.39	1,574.40	0.00	0.00	0.00
14,000.00	89.10	179.48	12,392.41	-1,668.96	167.30	1,674.33	0.00	0.00	0.00
14,100.00	89.10	179.48	12,393.99	-1,768.94	168.21	1,774.27	0.00	0.00	0.00
14,200.00	89.10	179.48	12,395.56	-1,868.92	169.12	1,874.21	0.00	0.00	0.00
14,300.00	89.10	179.48	12,397.14	-1,968.91	170.03	1,974.15	0.00	0.00	0.00
14,400.00	89.10	179.48	12,398.71	-2,068.89	170.94	2,074.09	0.00	0.00	0.00
14,500.00	89.10	179.48	12,400.29	-2,168.87	171.85	2,174.03	0.00	0.00	0.00
14,600.00	89.10	179.48	12,401.86	-2,268.86	172.76	2,273.97	0.00	0.00	0.00
14,700.00	89.10	179.48	12,403.44	-2,368.84	173.67	2,373.91	0.00	0.00	0.00
14,800.00	89.10	179.48	12,405.01	-2,468.82	174.58	2,473.85	0.00	0.00	0.00
14,900.00	89.10	179.48	12,406.59	-2,568.81	175.48	2,573.79	0.00	0.00	0.00
15,000.00	89.10	179.48	12,408.16	-2,668.79	176.39	2,673.73	0.00	0.00	0.00
15,100.00	89.10	179.48	12,409.74	-2,768.77	177.30	2,773.66	0.00	0.00	0.00
15,200.00	89.10	179.48	12,411.31	-2,868.76	178.21	2,873.60	0.00	0.00	0.00
15,300.00	89.10	179.48	12,412.89	-2,968.74	179.12	2,973.54	0.00	0.00	0.00
15,400.00	89.10	179.48	12,414.46	-3,068.72	180.03	3,073.48	0.00	0.00	0.00
15,500.00	89.10	179.48	12,416.04	-3,168.71	180.94	3,173.42	0.00	0.00	0.00
15,600.00	89.10	179.48	12,417.61	-3,268.69	181.85	3,273.36	0.00	0.00	0.00
15,700.00	89.10	179.48	12,419.19	-3,368.67	182.76	3,373.30	0.00	0.00	0.00
15,800.00	89.10	179.48	12,420.76	-3,468.66	183.66	3,473.24	0.00	0.00	0.00
15,900.00	89.10	179.48	12,422.34	-3,568.64	184.57	3,573.18	0.00	0.00	0.00
16,000.00	89.10	179.48	12,423.91	-3,668.62	185.48	3,673.12	0.00	0.00	0.00
16,100.00	89.10	179.48	12,425.49	-3,768.61	186.39	3,773.06	0.00	0.00	0.00
16,200.00	89.10	179.48	12,427.06	-3,868.59	187.30	3,872.99	0.00	0.00	0.00
16,300.00	89.10	179.48	12,428.63	-3,968.58	188.21	3,972.93	0.00	0.00	0.00
16,400.00	89.10	179.48	12,430.21	-4,068.56	189.12	4,072.87	0.00	0.00	0.00
16,500.00	89.10	179.48	12,431.78	-4,168.54	190.03	4,172.81	0.00	0.00	0.00
16,600.00	89.10	179.48	12,433.36	-4,268.53	190.94	4,272.75	0.00	0.00	0.00
16,700.00	89.10	179.48	12,434.93	-4,368.51	191.84	4,372.69	0.00	0.00	0.00
16,800.00	89.10	179.48	12,436.51	-4,468.49	192.75	4,472.63	0.00	0.00	0.00
16,900.00	89.10	179.48	12,438.08	-4,568.48	193.66	4,572.57	0.00	0.00	0.00
17,000.00	89.10	179.48	12,439.66	-4,668.46	194.57	4,672.51	0.00	0.00	0.00
17,082.42	89.10	179.48	12,440.96	-4,750.86	195.32	4,754.88	0.00	0.00	0.00
Hennin Federal 12H LTP									
17,100.00	89.10	179.48	12,441.23	-4,768.44	195.48	4,772.45	0.00	0.00	0.00
17,200.00	89.10	179.48	12,442.81	-4,868.43	196.39	4,872.39	0.00	0.00	0.00
17,212.19	89.10	179.48	12,443.00	-4,880.61	196.50	4,884.56	0.00	0.00	0.00



Company:	COG Operating L L C	Local Co-ordinate Reference:	Well Hennin Federal 12H
Project:	Lea County, NM (NAD27 NME)	TVD Reference:	KB=26 @ 3196.00ft
Site:	Sec. 3, T.26 S. , R.35 E	MD Reference:	KB=26 @ 3196.00ft
Well:	Hennin Federal 12H	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Plan #1	Database:	EDM 5000.1 Multi User Db

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	N/S (ft)	E/W (ft)	Vertical Section (ft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
TD at 17212.19 - Hennin Federal 12H BHL									

Design Targets									
Target Name	Hit/Miss Target	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	N/S (ft)	E/W (ft)	Northing (usft)	Easting (usft)	Latitude
Hennin Federal 12H F	- Shape	0.00	0.00	12,327.9 3	-118.80	153.10	393,677.6041	803,711.8961	32.078541
- plan misses target center by 0.93ft at 12443.42ft MD (12327.94 TVD, -118.81 N, 152.16 E)									
- Point									
Hennin Federal 12H L		0.00	0.00	12,440.9 6	-4,750.86	195.50	389,045.5473	803,754.3026	32.065808
- plan misses target center by 0.18ft at 17082.42ft MD (12440.96 TVD, -4750.86 N, 195.32 E)									
- Point									
Hennin Federal 12H E		0.00	0.00	12,443.0 0	-4,880.61	196.50	388,915.8000	803,755.3000	32.065451
- plan hits target center									
- Point									

Plan Annotations				
Measured Depth (ft)	Vertical Depth (ft)	Local Coordinates		Comment
		N/S (ft)	E/W (ft)	
6500	6500	0	0	Start Build 2.00
6614	6614	2	1	Start 5270.05 hold at 6613.66 MD
11,884	11,880	160	138	Start DLS 12.00 TFO 138.70
12,640	12,371	-310	155	Start 4571.76 hold at 12640.42 MD
17,212	12,443	-4881	197	TD at 17212.19

Checked By: _____ Approved By: _____ Date: _____

COG Operating, LLC - Hennin Federal 12H

1. Geologic Formations

TVD of target	12,443' EOL	Pilot hole depth	NA
MD at TD:	17,212'	Deepest expected fresh water:	240'

Formation	Depth (TVD) from KB	Water/Mineral Bearing/ Target Zone?	Hazards*
Quaternary Fill	Surface	Water	
Rustler	947	Water	
Top of Salt	1280	Salt	
Base of Salt	5031	Salt	
Lamar	5251	Salt Water	
Bell Canyon	5278	Salt Water	
Cherry Canyon	6178	Oil/Gas	
Brushy Canyon	7747	Oil/Gas	
Bone Spring Lime	9082	Oil/Gas	
U. Avalon Shale	9401	Oil/Gas	
L. Avalon Shale	9569	Oil/Gas	
1st Bone Spring Sand	10358	Oil/Gas	
2nd Bone Spring Sand	10843	Oil/Gas	
3rd Bone Spring Sand	11967	Target Oil/Gas	
Wolfcamp	12402	Not Penetrated	

2. Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Body
	From	To							
13.5"	0	975	10.75"	45.5	N80	BTC	5.54	1.20	23.44
9.875"	0	11750	7.625"	29.7	P110	BTC	1.29	1.11	3.11
6.75"	0	11250	5.5"	23	P110	BTC	1.95	2.04	3.25
6.75"	11250	17,212	5"	18	P110	BTC	1.95	2.04	3.25
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

Intermediate casing will be kept at least 1/3 full while running casing to mitigate collapse. Surface burst based on 0.7 frac gradient at the shoe with Gas Gradient 0.1 psi/ft to surface and
All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

The 5" casing will be run back 500' into the intermediate casing to ensure the coupling OD clearance is greater than .422" for the cement bond tie in.