

Submit 3 Copies To Appropriate District  
 Office  
 District I  
 1625 N. French Dr., Hobbs, NM 87240  
 District II  
 1301 W. Grand Ave., Artesia, NM 88210  
 District III  
 1000 Rio Brazos Rd., Aztec, NM 87410  
 District IV  
 1220 S. St. Francis Dr., Santa Fe, NM  
 87505

State of New Mexico  
 Energy, Minerals and Natural Resources

Form C-103  
 June 19, 2008

**RECEIVED**  
 CONSERVATION DIVISION  
 1220 South St. Francis Dr.  
 Santa Fe, NM 87505  
 NOV 16 2010  
**HOBSOCD**

WELL API NO. 30-025-02657 ✓	
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/> ✓	
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name: Betenhough B ✓	
8. Well Number 3 ✓	
9. OGRID Number 16696 ✓	
10. Pool name or Wildcat SWD BoughC ✓	
<b>SUNDRY NOTICES AND REPORTS ON WELLS</b> (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.) 1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other SWD <input checked="" type="checkbox"/> ✓	
2. Name of Operator OXY USA Inc ✓	
3. Address of Operator P.O. BOX 4294, HOUSTON, TX 77210	
4. Well Location Unit Letter <u>B</u> ; <u>660</u> feet from the <u>North</u> line and <u>1980</u> feet from the <u>EAST</u> line Section <u>14</u> Township <u>9S</u> Range <u>35E</u> NMPM County <u>Lea</u>	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4137' GR	

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK  PLUG AND ABANDON  X  
 TEMPORARILY ABANDON  CHANGE PLANS   
 PULL OR ALTER CASING  MULTIPLE COMPL   
 DOWNHOLE COMMINGLE

SUBSEQUENT REPORT OF:

REMEDIAL WORK  ALTERING CASING   
 COMMENCE DRILLING OPNS.  P AND A   
 CASING/CEMENT JOB

OTHER:  OTHER:

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

See Attachment

The Oil Conservation Division **Must be notified**  
**24 hours prior** to the beginning of plugging operations.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE  TITLE Regulatory Analyst DATE 11/08/2010  
 Type or print name Jereme Robinson E-mail address: Jereme\_Robinson@oxy.com PHONE 713.366.5360

For State Use Only

APPROVED BY  TITLE STAFF MGR DATE 11-17-10  
 Conditions of Approval (if any):

Betenbough B #3

TD-12574' PBD-9640' Perfs- 9711-9731' CIBP-9675' w/ 35' cmt to 9640'  
13-3/8" 48# csg @ 410' w/ 400sx, 17-1/2" hole, TOC-Suf-Circ  
9-5/8" 40# csg @ 4260' w/ 2550sx, 12-1/4" hole, TOC-Surf-Circ  
7" 23,26,29# csg @ 9805' w/ 2470sx, 8-3/4" hole, TOC-5290'-TS

Notify NMOCD 24-hours prior to work

Circ Hole w/ 10# MLF and between plugs.

1. RIH verify & tag cmt @ 9640'
2. Plug @ 8950-8850' w/ 40sx cmt WOC-TAG
3. Plug @ 7765-7665' w/ 35sx cmt WOC-TAG
4. Plug @ 5560-5460' w/ 35sx cmt WOC-TAG
5. Plug @ 5340-5240' w/ 45sx cmt (perf @ 5290' sqz to 5240') WOC-TAG
6. Plug @ 4310-4210' w/ 85sx cmt WOC-TAG, PERF @ 4310' SQ 85SX WOC-TAG
7. Plug @ 4090-3990' w/ 45sx cmt WOC-TAG
8. Plug @ 2800-2700' w/ 45sx cmt WOC-TAG
9. Plug @ 460'-Surf w/ 380sx cmt verify-WOC-TAG PERF @ 460' Circ. cmt to Surface
10. RDMO

Reclaim location per NMOCD rules

See attached WBD (Current and Proposed PA)




OXY USA Inc.

# Betenbough "B" #3

API#: 3002502657

Proposed PA

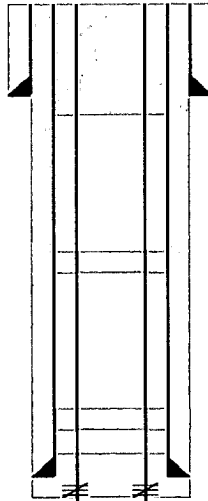

*Perf + Circ @ 460*  
Plug @ 460'-Surf w/ 380sx cmt, WOC-TAG

Plug @ 2800-2700' w/ 45sx cmt WOC-TAG

Plug @ 4090-3990' w/ 45sx cmt WOC-TAG

*Perf + SQ - WOC-TAG*  
Plug @ 4310-4210' w/ 85sx cmt WOC-TAG

Plug @ 5340-5240' w/ 45sx cmt (perf @ 5290 SQZ to 5240)

Plug @ 5560-5460' w/ 35sx cmt WOC-TAG

Plug @ 7765-7665' w/ 35sx cmt WOC-TAG

Plug @ 8950-8850' w/ 40sx cmt WOC-TAG

CIBP @ 9675' w/ 35' cmt @ 9640'  
(need to verify & tag cmt)

PBTD: 9640'

TD: 12,574'

**Surface Casing:**

Drid 17 1/2" hole.  
13-3/8" 48# csg set at 410'  
Cmt'd w/ 400sx to surface (circ).

**Intermediate Casing:**

Drid 12-1/4" hole  
9-5/8" 40# 0' - 4260'.  
Cmt'd w/ 2550sx, TOC-Surface (circ).

**Production Casing:**

Drid 8-3/4" hole.  
7" 23,26,29# 0' - 9805'.  
Cmt'd w/ 2470sx, TOC-5290'.

**Formation:**

Bough Lime

**Perforations:**

9711-973' (Plugged)



OXY USA Inc.

# Betenbough "B" #3

API#: 3002502657

Current

**Surface Casing:**


Drld 17 1/2" hole.  
13-3/8" 48# csg set at 410'  
Cmt'd w/ 400sx to surface (circ).

**Intermediate Casing:**

Drld 12-1/4" hole  
9-5/8" 40# 0' - 4260'.  
Cmt'd w/ 2550sx, TOC-Surface (circ).

**Production Casing:**


Drld 8-3/4" hole.  
7" 23,26,29# 0' - 9805'.  
Cmt'd w/ 2470sx, TOC-5290'.

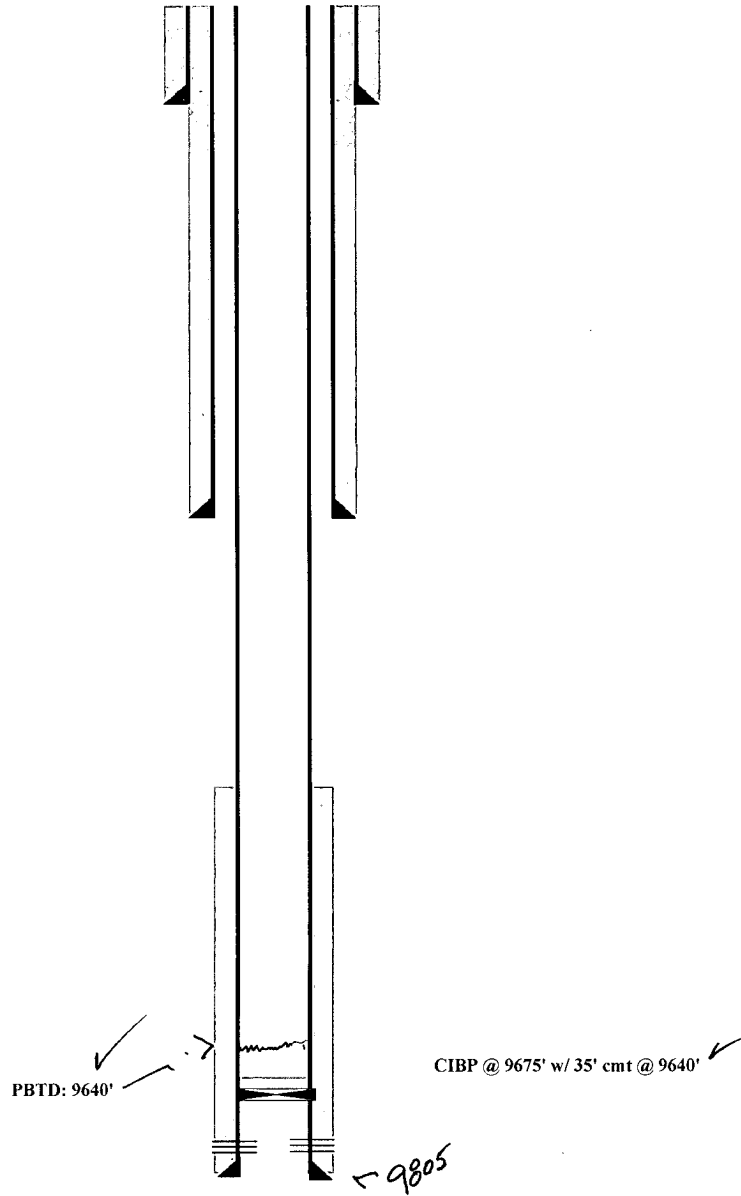

**Formation:**

**Perforations:**

9711-973' (Plugged)



TD: 12,574'