


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

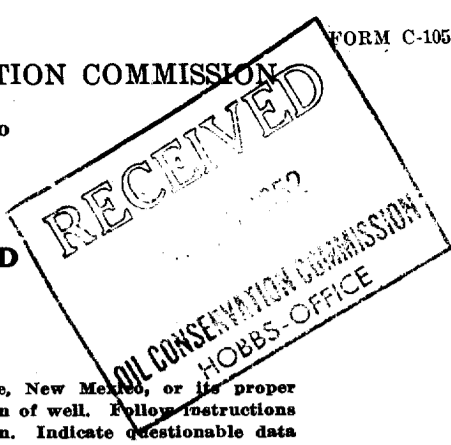

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

N.									

AREA 640 ACRES
LOCATE WELL CORRECTLY

Hassie Hunt Trust Estate

Harry Elliott

Company or Operator 1 in NE/4 NW/4 of Sec. 22 Lease
Well No. Wildcat in Chaves T. 11-South
R. 31-East N. M. P. M., _____ Field, _____ County.
Well is 660 feet south of the North line and 1980 feet East West of the East line of _____
If State land the oil and gas lease is No. _____ Assignment No. _____
If patented land the owner is Asa Proctor Address Roswell, New Mexico
If Government land the permittee is _____ Address _____
The Lessee is Hassie Hunt Trust Estate Address Dallas, Texas
Drilling commenced 11-26-51 19____ Drilling was completed 5-12-52 19____
Name of drilling contractor Arrow Drilling Company Address Odessa, Texas
Elevation above sea level at top of casing 4482 feet.
The information given is to be kept confidential until Not Confidential 19____

OIL SANDS OR ZONES
Small show of gas

No. 1, from 10,867 to 10,930 No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.
No important water sands encountered
No. 1, from _____ to _____ feet.
No. 2, from _____ to _____ feet.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
13 3/8	OD 48	8		305	Hall			
9 5/8	OD 36	8		3613	Hall			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
15 1/4	13 3/8	305		Circulated cement		
12 1/4	9 5/8	3613		Circulated cement		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.
Drill stem test on attached sheet.

TOOLS USED

Rotary tools were used from 0 feet to 11,066 feet, and from _____ feet to _____ feet.
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet.

PRODUCTION

Put to producing _____, 19____
The production of the first 24 hours was _____ barrels of fluid of which _____ % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, Be _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

Driller _____ Driller _____
Driller _____ Driller _____

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Midland, Texas 6-16-52
Place Date
Name Ed. Barton
Position Production Superintendent
Representing Hassie Hunt Trust Estate
Company or Operator.
Address 503 VJ Tower Building

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	-41	41	Surface Caliche
41	-331	290	Redbed
331	-1950	1619	Redbed
1950	-2230	280	Redbed, Salt
2230	-2383	153	Salt, Shells
2383	-2755	372	Salt, Anhy.
2755	-3568	813	Anhy. Gyp.
3568	-7239	3671	Lime
7239	-7772	533	Abc Shale
7772	-8119	347	Lime, Shale
8119	-8157	38	Lime
8157	-8216	59	Dolomite
8216	-8221	5	Dolomite, Chert Streaks
8221	-8254	33	Dolomite
8254	-8323	69	Dolomite, Chert Streaks
8323	-8459	136	Lime
8459	-8477	18	Lime, Chert
8477	-8637	160	Lime
8637	-8684	47	Lime
8684	-8773	89	Lime
8773	-9058	285	Lime, Shale
9058	-9292	234	Lime
9292	-9494	202	Lime, Shale
9494	-9677	183	Lime
9677	-10209	532	Lime, Shale
10209	-10347	138	Sharp Lime
10347	-10355	8	Lime, Chert
10355	-10608	253	Lime
10608	-10613	5	Lime, Chert
10613	-10702	89	Lime
10702	-10758	56	Lime, Quartz
10758	-10896	138	Lime
10896	-11012	116	Lime, Shale
11012	-11066	54	Lime