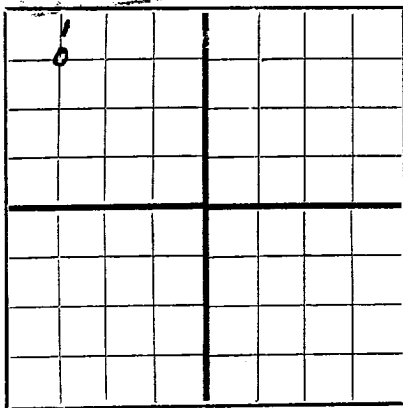
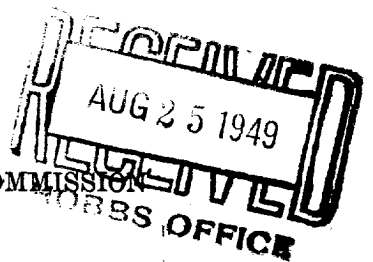


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New MexicoAREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Amerada Petroleum Corporation Drawer D, Monument, New Mexico
Company or Operator Address
State HTB Well No. 1 in NE1/4 of Sec. 26, T. 12-S
Lease R. 33-E, N. M. P. M. Wildest Field, Lea County.
Well is 660 feet south of the North line and 660 feet east of the East line of Sec. 26-12S-33E
If State land the oil and gas lease is No. B-10706 Assignment No.
If patented land the owner is Address
If Government land the permittee is Address
The Lessee is **Amerada Petroleum Corporation** Address **Box 2040, Tulsa, Oklahoma**
Drilling commenced **March 28, 1949** Drilling was completed **August 26, 1949**
Name of drilling contractor **McVay & Stafford Drilling Company** Address **Tulsa, Oklahoma**
Elevation above sea level at top of casing **4245** feet.
The information given is to be kept confidential until **Not confidential** 19.

OIL SANDS OR ZONES

No. 1, from **10,170'** to **10,180' Perforated** No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO		PURPOSE
13-3/8"	35.06	S.J.	Knefeld	277'	Guide				
8-5/8"	32	S.M.	S.S.	3925'	Float				
5-1/2"	17	S.M.	S.S.	10270'	Float		10170'	10180'	Testing

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2"	13-3/8"	277'	200	Halliburton		
11"	8-5/8"	3925'	1800	Halliburton		
7-7/8"	5-1/2"	10270'	700	Halliburton		
7-7/8" Hole was drilled to 11,199' and was plugged back to 10270' with 100 sacks cement.						

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Acid	250 Gal.	8-25-49	10170'-10180'	

Results of shooting or chemical treatment **Flowed 1,386.44 Bbls. oil and 16.84 Bbls. water through a 2 1/2" Positive Choke in 24 hours.**

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

See attached sheet.
TOOLS USED

Rotary tools were used from **0** feet to **11199'** feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing **August 26, 1949**
The production of the first 24 hours was **1,403.28** barrels of fluid of which **98.8** % was oil; %
emulsion; **1.2** % water; and % sediment. Gravity, Be. **57.1**
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas.
Rock pressure, lbs. per sq. in.

EMPLOYEES

T. H. Dooley Driller **J. L. Taylor** Driller
Jim Clark Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **26th**day of **August**, 19 **49****Will Hail Taylor**
Notary PublicMy Commission expires **March 29, 1952****Monument, New Mexico** **August 26, 1949**
Place DateName **Don Taylor**Position **Assistant District Superintendent**Representing **Amerada Petroleum Corporation**
Company or OperatorAddress **Drawer D, Monument, New Mexico**

