

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well  gas well  other Water Injection

2. NAME OF OPERATOR  
Continental Oil Company

3. ADDRESS OF OPERATOR  
Box 460, Hobbs, N.M. 88240

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 660' FSL + 660' FWN  
AT TOP PROD. INTERVAL: 52MP  
AT TOTAL DEPTH: 52MO

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:		SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF	<input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT	<input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE	<input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL	<input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING	<input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE	<input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES	<input type="checkbox"/>	<input type="checkbox"/>
ABANDON*	<input type="checkbox"/>	<input checked="" type="checkbox"/>
(other)	<input type="checkbox"/>	<input type="checkbox"/>

5. LEASE  
LC-029409 (a)

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME  
PEARSALL AX

9. WELL NO.  
2

10. FIELD OR WILDCAT NAME  
Pearsall Queen

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Sec. 33, T-17S, R-32E

12. COUNTY OR PARISH  
Lea.

13. STATE  
N.M.

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)  
3888' GR

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Pumped 150 sx class "C" crnt, with 3# of soft Per sx, down the Tbg. Pumped 250 sx class "C" crnt with 3# of soft Per sx, down the CSG - CSG Annulus. Spotted 10 sx crnt surface plug. Erected Dry Hole Marker.  
PtAbd 1-5-78.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.


18. I hereby certify that the foregoing is true and correct

SIGNED Wm. A. Rutherford TITLE ADMIN. SUPV. DATE 2-17-78

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_

CONDITIONS OF APPROVAL, IF ANY:

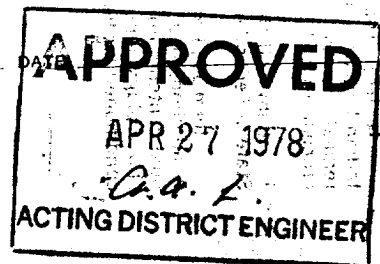

\*See Instructions on Reverse Side

USGS (5), File