



STATE OF NEW MEXICO  
ENERGY AND MINERALS DEPARTMENT  
OIL CONSERVATION DIVISION  
HOBBS DISTRICT OFFICE

GARREY CARRUTHERS  
GOVERNOR

9-15-87

POST OFFICE BOX 1980  
HOBBS, NEW MEXICO 88241-1980  
(505) 393-6161

OIL CONSERVATION DIVISION  
P. O. BOX 2088  
SANTA FE, NEW MEXICO 87501

*And - 330*

RE: Proposed:

MC \_\_\_\_\_  
DHC \_\_\_\_\_  
NSL \_\_\_\_\_  
NSP \_\_\_\_\_  
SWD *X* \_\_\_\_\_  
WFX \_\_\_\_\_  
PMX \_\_\_\_\_

Gentlemen:

I have examined the application for the:

*Sixace Inc.* *Weyoce #4-A* *2-15-87*  
Operator Lease & Well No. Unit S-T-R

and my recommendations are as follows:

*ok JS*

Yours very truly,

Jerry Sexton  
Supervisor, District 1

/ed



Texaco USA

P O Box 728  
Hobbs NM 88240  
505 393 7191

September 4, 1987

State of New Mexico  
Department of Energy & Minerals  
Oil Conservation Division  
P. O. Box 2088  
Santa Fe, New Mexico 87501

Attention: Mr. David Catanach

RE: Conversion to Salt Water Disposal  
Mexico "F" Well No. 4  
Unit Letter D, Sec. 2, T-15-S, R-37-E  
Lea County, New Mexico

Gentlemen:

Texaco Producing Inc. respectfully requests administrative approval of the referenced application by provisions in Rule 701.B.3 and 701.D.

In support of this application, you will find attached:

- 1) Form C-108
- 2) Map identifying wells and leases within 2-mile radius and the 1/2 mile radius area of review.
- 3) Table containing data on wells in area of review that penetrate the disposal zone.
- 4) Schematics of plugged wells in the area of review.
- 5) Injection well data sheet.
- 6) List of affected offset operators and surface owner.
- 7) Letters mailed to offset operators and surface owner notifying them of this application.
- 8) Chemical analysis of waters to be injected and disposal zone water.
- 9) Affidavit of publication and copy of legal notice.

Average injection rate into the well will be 500 barrels per day with a maximum of 1000 barrels per day. Average injection pressure will be 0 and the maximum pressure will be 100 PSI. The well will be stimulated with 2000 gallons of 15% NEFE acid.

Mr. David Catanach

-2-

September 4, 1987

Injection will be into the Devonian formation at a depth of 12,160 feet to 12,306 feet.

The Ogallala Aquifer lies above the disposal zone at approximately 90'-150' below the surface. The only fresh water well near the lease is located approximately 1.5 miles North of the lease. An analysis of water from this well is attached.

Texaco Producing has examined available geologic and engineering data and found no evidence of open faults or any other hydrologic connection between the disposal zone and any underground source of drinking water.

Your timely consideration of this application will be greatly appreciated.

Yours very truly,



L. J. Seeman  
District Petroleum Engineer

LDR:JRB

Attachments

cc: NMOCD  
Hobbs, NM

## APPLICATION FOR AUTHORIZATION TO INJECT

- I. Purpose:  Secondary Recovery  Pressure Maintenance  Disposal  Storage  
Application qualifies for administrative approval?  yes  no

II. Operator: Texaco Producing Inc.

Address: P. O. Box 728, Hobbs, New Mexico 88240

Contact party: L. J. Seeman Phone: 505-393-7191

III. Well data: Complete the data required on the reverse side of this form for each well proposed for injection. Additional sheets may be attached if necessary.

IV. Is this an expansion of an existing project?  yes  no  
If yes, give the Division order number authorizing the project \_\_\_\_\_.

V. Attach a map that identifies all wells and leases within two miles of any proposed injection well with a one-half mile radius circle drawn around each proposed injection well. This circle identifies the well's area of review.

VI. Attach a tabulation of data on all wells of public record within the area of review which penetrate the proposed injection zone. Such data shall include a description of each well's type, construction, date drilled, location, depth, record of completion, and a schematic of any plugged well illustrating all plugging detail.

VII. Attach data on the proposed operation, including:

1. Proposed average and maximum daily rate and volume of fluids to be injected;
2. Whether the system is open or Closed;
3. Proposed average and maximum injection pressure;
4. Sources and an appropriate analysis of injection fluid and compatibility with the receiving formation if other than reinjected produced water; and
5. If injection is for disposal purposes into a zone not productive of oil or gas at or within one mile of the proposed well, attach a chemical analysis of the disposal zone formation water (may be measured or inferred from existing literature, studies, nearby wells, etc.).

VIII. Attach appropriate geological data on the injection zone including appropriate lithologic detail, geological name, thickness, and depth. Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlying the proposed injection zone as well as any such source known to be immediately underlying the injection interval.

IX. Describe the proposed stimulation program, if any.

X. Attach appropriate logging and test data on the well. (If well logs have been filed with the Division they need not be resubmitted.)

XI. Attach a chemical analysis of fresh water from two or more fresh water wells (if available and producing) within one mile of any injection or disposal well showing location of wells and dates samples were taken.

XII. Applicants for disposal wells must make an affirmative statement that they have examined available geologic and engineering data and find no evidence of open faults or any other hydrologic connection between the disposal zone and any underground source of drinking water.

XIII. Applicants must complete the "Proof of Notice" section on the reverse side of this form.

XIV. Certification

I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.

Name: L. J. Seeman Title District Petroleum Engineer

Signature: L.J. Seeman Date: September 4, 1987

If the information required under Sections VI, VIII, X, and XI above has been previously submitted, it need not be duplicated and resubmitted. Please show the date and circumstance of the earlier submittal.




WELLS WITHIN 1/2 MILE RADIUS OF TPI's MEXICO "F" WELL NO. 4  
THAT PENETRATE THE PROPOSED INJECTION ZONE

<u>Operator, Well Name &amp; No.</u>	<u>Formation</u>	<u>Total Depth</u>	<u>Date Drilled</u>	<u>Current Status</u>	<u>Hole Size</u>	<u>Casing Size</u>	<u>Depth</u>	<u>Cement (sx)</u>	<u>TOC</u>	<u>Determined By</u>
<u>ARCO</u>	<u>Jones Federal No. 1</u> <u>660' FNL &amp; 660' FWL</u> <u>Sec. 35, T-14-S, R-37-E</u>	<u>Devonian</u>	<u>12,700'</u>	<u>7/23/51</u>	<u>P &amp; A</u>	<u>18"</u> <u>12-1/4"</u> <u>8-5/8"</u>	<u>13-3/8"</u> <u>9-5/8"</u> <u>7"</u>	<u>314'</u> <u>4,677'</u> <u>12,697'</u>	<u>475</u>	<u>Surface Circulated</u>
<u>B. C. Dickinson A-34 No. 2</u> <u>1650' FNL &amp; 330' FEL</u> <u>Sec. 34, T-14-S, R-37-E</u>	<u>Devonian</u>	<u>12,603'</u>	<u>3/01/53</u>	<u>P &amp; A</u>	<u>17-1/2"</u> <u>12-1/2"</u> <u>8-3/4"</u>	<u>13-3/8"</u> <u>9-5/8"</u> <u>5-1/2"</u>	<u>297'</u> <u>4,729'</u> <u>12,603'</u>	<u>350</u> <u>3000</u> <u>1150</u>	<u>Surface Calc. 50% fillup</u> <u>Surface Calc. 50% fillup</u> <u>9,917' Calc. 50% fillup</u>	
<u>Mobil</u> <u>T. D. Pope Well No. 1</u> <u>1980' FEL &amp; 660' FSL</u> <u>Sec. 35, T-14-S, R-37-E</u>	<u>Devonian</u>	<u>12,702'</u>	<u>10/30/51</u>	<u>Producing</u>	<u>17-1/2"</u> <u>11"</u> <u>7-7/8"</u>	<u>13-3/8"</u> <u>8-5/8"</u> <u>5-1/2"</u>	<u>411'</u> <u>4,746'</u> <u>12,487'</u>	<u>500</u> <u>3699</u> <u>1793</u>	<u>Surface Circulated</u> <u>Surface Circulated</u> <u>930' TS</u>	
<u>Denton N. Wolfcamp Ut.</u> <u>Trt. 1, No. 2</u> <u>330' FSL &amp; 330' FEL</u> <u>Sec. 34, T-14-S, R-37-E</u>	<u>Wolfcamp</u>	<u>12,536'</u>	<u>6/24/52</u>	<u>P &amp; A</u>	<u>17-1/2"</u> <u>12-1/4"</u> <u>8-3/4"</u>	<u>13-3/8"</u> <u>9-5/8"</u> <u>7"</u>	<u>324'</u> <u>4,754</u> <u>12,536</u>	<u>350</u> <u>3000</u> <u>750</u>	<u>Surface Circulated</u> <u>Surface Circulated</u> <u>11,824' Calc.</u>	
<u>Hondo</u> <u>State T Well No. 2</u> <u>1980' FNL &amp; 1980' FWL</u> <u>Sec. 2, T-15-S, R-37-E</u>	<u>Devonian</u>	<u>12,713'</u>	<u>3/17/51</u>	<u>Producing</u>	<u>17-1/2"</u> <u>12-1/4"</u> <u>8-3/4"</u> <u>(Liner) 5"</u>	<u>13-3/8"</u> <u>9-5/8"</u> <u>7"</u> <u>5"</u>	<u>320'</u> <u>4,689'</u> <u>10,580'</u> <u>10215'-12713'</u>	<u>375</u> <u>2500</u> <u>925</u> <u>200</u>	<u>Surface Circulated</u> <u>23' Calc. 50% fillup</u> <u>6,950' Calc. 50% fillup</u> <u>10,215' Calc. 50% fillup</u>	
<u>Polaris</u> <u>State A Well No. 2</u> <u>1980' FSL &amp; 660' FWL</u> <u>Sec. 2, T-15-S, R-37-E</u>	<u>Devonian</u>	<u>12,500'</u>	<u>8/22/51</u>	<u>Producing</u>	<u>17-1/4"</u> <u>11"</u> <u>7-7/8"</u>	<u>13-3/8"</u> <u>8-5/8"</u> <u>5-1/2"</u>	<u>356'</u> <u>4,680'</u> <u>12,500'</u>	<u>300</u> <u>3500</u> <u>750</u>	<u>Surface Circulated</u> <u>Surface Circulated</u> <u>8,240' TS</u>	
<u>Argo Well No. 2</u> <u>990' FNL &amp; 330' FEL</u> <u>Sec. 3, T-15-S, R-37-E</u>	<u>Devonian</u>	<u>12,691'</u>	<u>2/16/52</u>	<u>Producing</u>	<u>17-1/4"</u> <u>11"</u> <u>7-7/8"</u>	<u>13-3/8"</u> <u>8-5/8"</u> <u>5-1/2"</u>	<u>326'</u> <u>4,742'</u> <u>12,082'</u>	<u>325</u> <u>3500</u> <u>1000</u>	<u>Surface Circulated</u> <u>Surface Circulated</u> <u>8,677' Calc. 50% fillup</u>	
<u>Argo Well No. 1</u> <u>660' FNL &amp; 660' FEL</u> <u>Sec. 3, T-15-S, R-37-E</u>	<u>Devonian</u>	<u>12,690'</u>	<u>11/13/51</u>	<u>Producing</u>	<u>17-1/4"</u> <u>11"</u> <u>7-7/8"</u>	<u>13-3/8"</u> <u>8-5/8"</u> <u>5-1/2"</u>	<u>374'</u> <u>4,655'</u> <u>12,500'</u>	<u>325</u> <u>3500</u> <u>1150</u>	<u>Surface Circulated</u> <u>Surface Circulated</u> <u>8,584' Calc. 50% fillup</u>	
<u>Texaco Producing Inc.</u> <u>Mexico "F" Well No. 1</u> <u>660' FNL &amp; 1980' FWL</u> <u>Sec. 2, T-15-S, R-37-E</u>	<u>Devonian</u>	<u>12,887'</u>	<u>5/19/51</u>	<u>Producing</u>	<u>18"</u> <u>12-1/4"</u> <u>7-7/8"</u>	<u>13-3/8"</u> <u>9-5/8"</u> <u>5-1/2"</u>	<u>355'</u> <u>4,820'</u> <u>12,887'</u>	<u>350</u> <u>3600</u> <u>1500</u>	<u>Surface Circulated</u> <u>Surface Circulated</u> <u>4,695' TS</u>	
<u>Mexico "F" Well No. 3</u> <u>1980' FNL &amp; 660' FWL</u> <u>Sec. 2, T-15-S, R-37-E</u>	<u>Devonian</u>	<u>12,732'</u>	<u>11/10/51</u>	<u>Producing</u>	<u>18"</u> <u>12-1/4"</u> <u>7-7/8"</u>	<u>13-3/8"</u> <u>8-5/8"</u> <u>5-1/2"</u>	<u>345'</u> <u>4,800'</u> <u>12,732'</u>	<u>225</u> <u>3500</u> <u>1420</u>	<u>Surface Circulated</u> <u>Surface Circulated</u> <u>3,298' TS</u>	
<u>Mexico "F" Well No. 5</u> <u>660' FNL &amp; 1980' FEL</u> <u>Sec. 2, T-15-S, R-37-E</u>	<u>Devonian</u>	<u>12,600'</u>	<u>5/05/52</u>	<u>Producing</u>	<u>18"</u> <u>12-1/4"</u> <u>7-7/8"</u>	<u>9-5/8"</u> <u>5-1/2"</u>	<u>331'</u> <u>4,792'</u> <u>12,600'</u>	<u>350</u> <u>3250</u> <u>1705</u>	<u>Surface Circulated</u> <u>Surface Circulated</u> <u>6,794' Calc. 50% fillup</u>	

OPERATOR : HKCO

B. C. D. Kinson A-34 No. 2


1650' FSL + 330' FEL Sec. 34, T-14-S, R-37-E

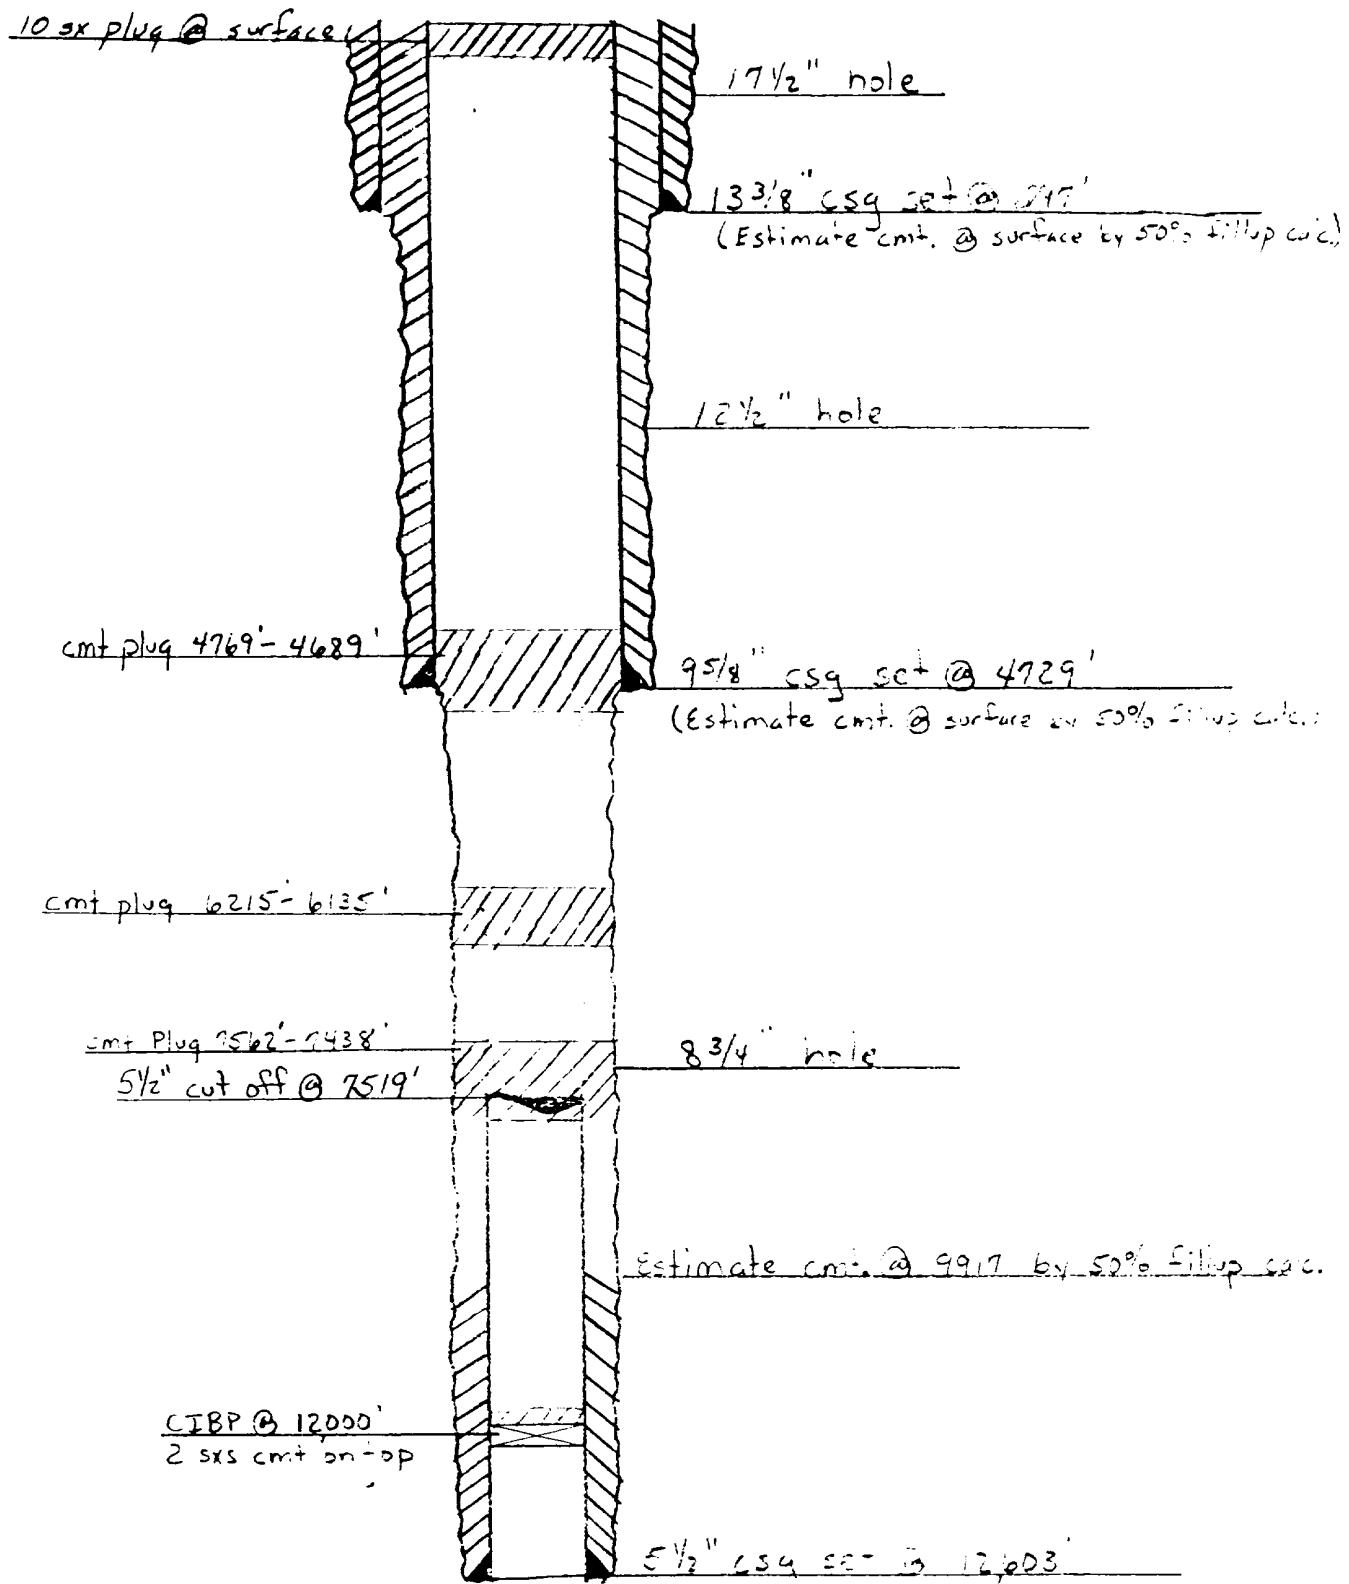

OPERATOR: Arco

Jon's Federal Well No.

660' FSL + 660' FWL sec 35, T-14-S, R-37-E

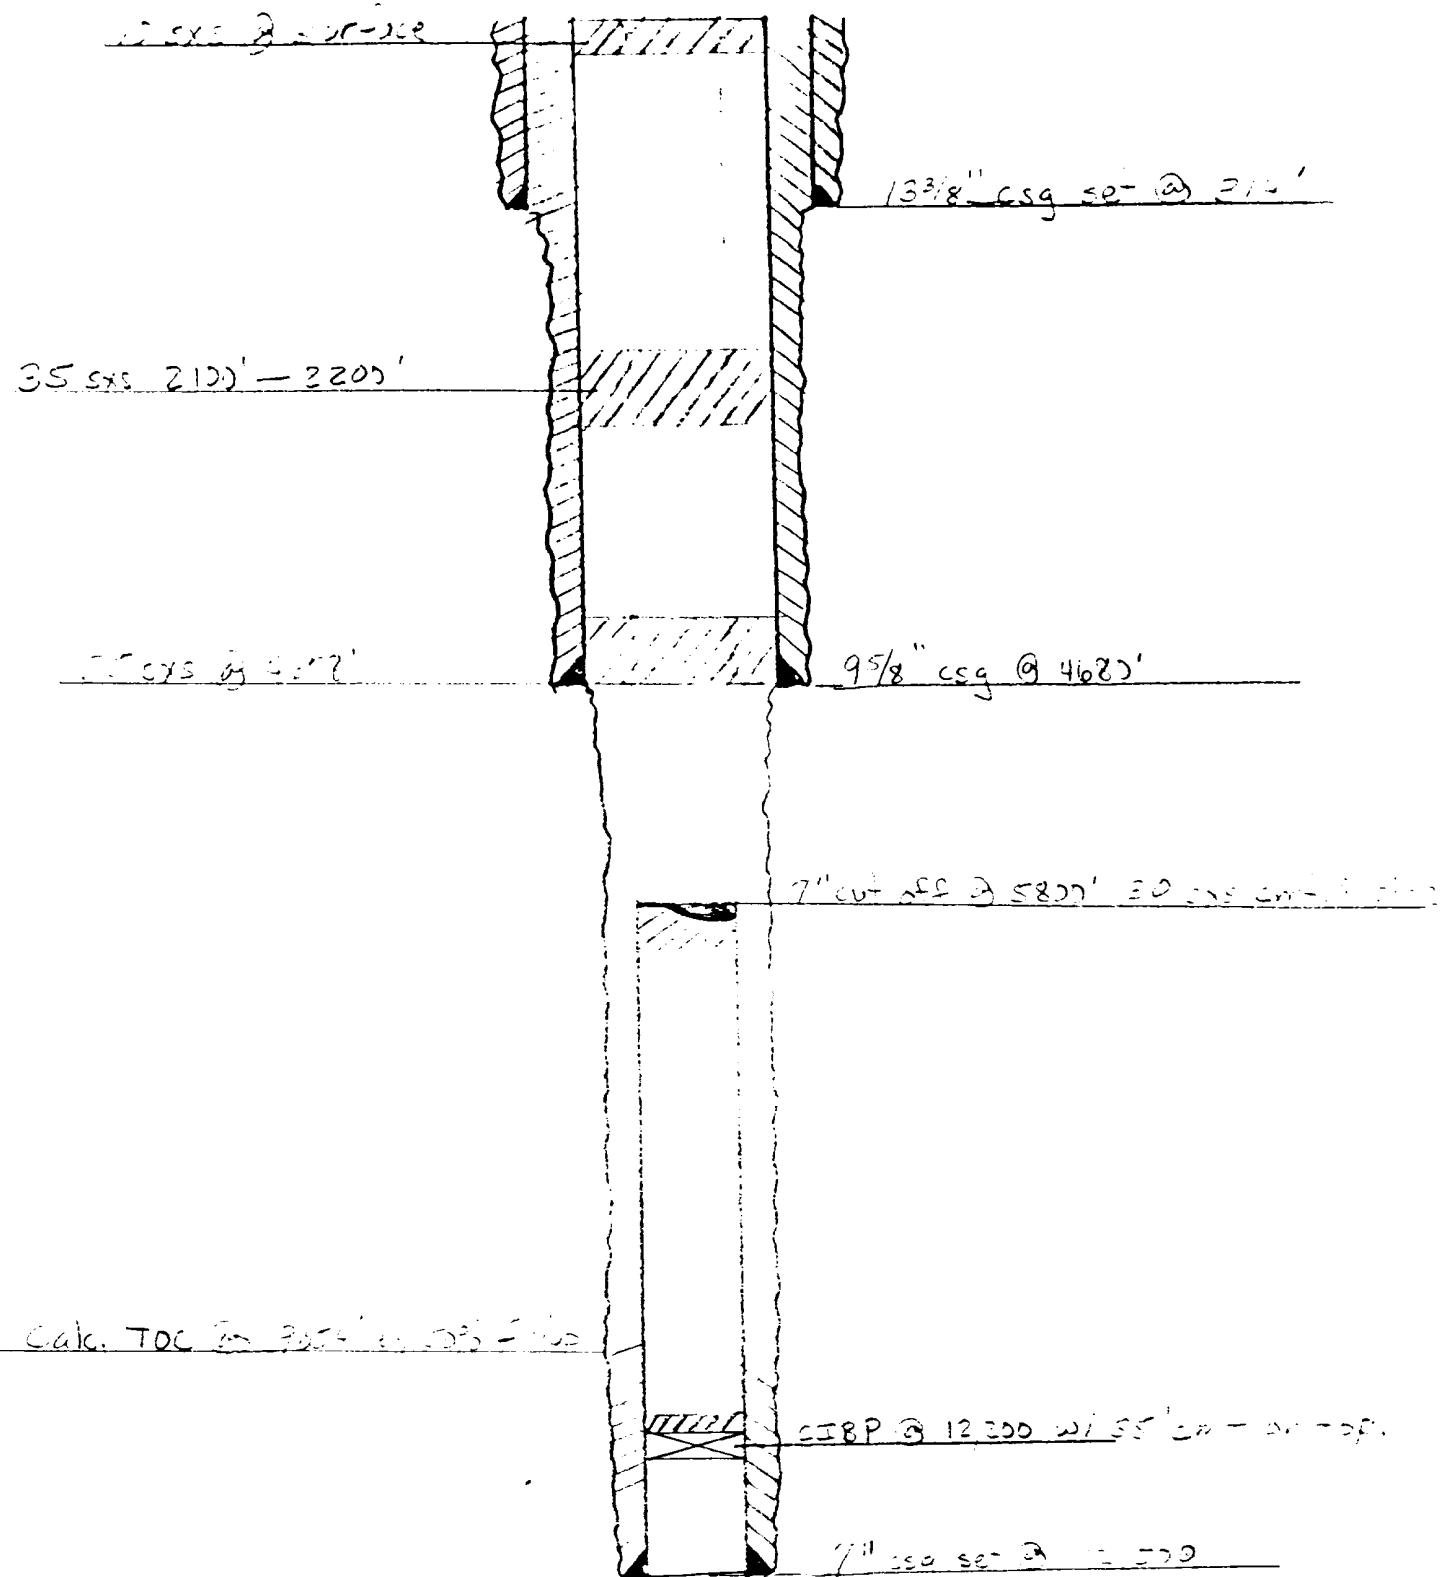

DATE 7-15-85 MOBIL Denton N. Wolfcamp Ut Trt. 1 WELL No. 2  
WELL 1-2 LEASE ON WU FIELD DNW


LOCATION 34-P, 14S, 37E  
LEA CO. NEW MEXICO

SIGNED M.E. VASICEK

G.L.  
D.F. 3822  
K.B.  
ZERO

P  
E  
A

PROPOSED

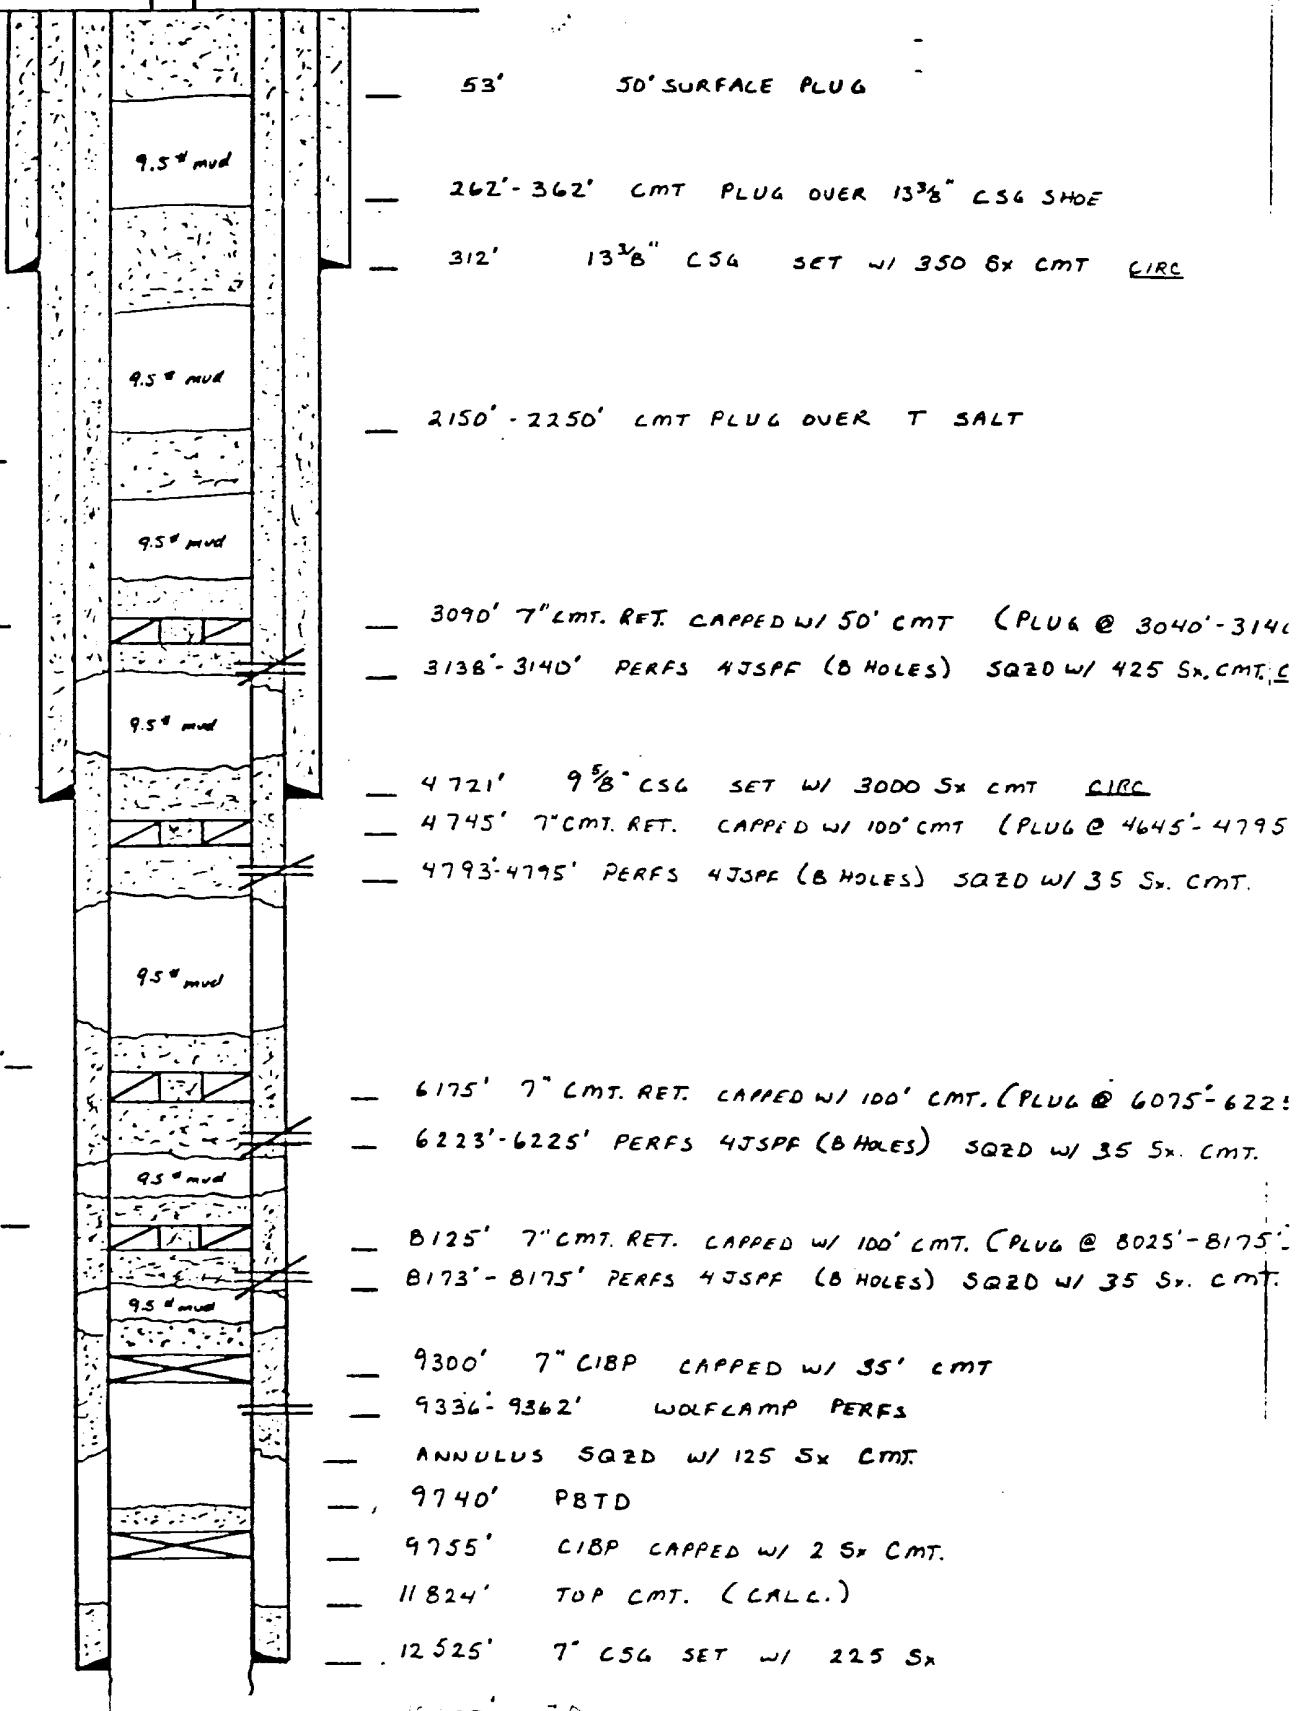

## INJECTION WELL DATA SHEET

OPERATOR	LEASE			
Texaco Producing Inc.	Mexico "F"			
WELL NO.	FOOTAGE LOCATION	SECTION	TOWNSHIP	RANGE
4	660' FNL & 660' FWL	2	15-S	37-E

Schematic

See Attachment

Tabular DataSurface Casing

Size 13-3/8 " Cemented with 300 sx.  
 TOC Surface feet determined by Circulated  
 Hole size 17-1/2"

Intermediate Casing

Size 9-5/8 " Cemented with 1660 sx.  
 TOC 144 feet determined by Temp. Survey  
 Hole size 12-1/4"

Long string

Size 5-1/2 " Cemented with 1925 sx.  
 TOC 5065 feet determined by Temp. Survey  
 Hole size 7-7/8"  
 Total depth 12,550' (PBTD - 12,314')

Injection interval

12,160 feet to 12,306 feet  
 (perforated or ~~open hole~~, indicate which)


Tubing size 2-3/8" lined with cement set in a  
Baker Lockset (brand and model) packer at 12,100 feet

(or describe any other casing-tubing seal).

Other Data

1. Name of the injection formation Devonian
2. Name of Field or Pool (if applicable) Denton Devonian
3. Is this a new well drilled for injection?  Yes  No  
 If no, for what purpose was the well originally drilled? oil production
4. Has the well ever been perforated in any other zone(s)? List all such perforated intervals and give plugging detail (sacks of cement or bridge plug(s) used) Wolfcamp 9210'-9351'  
 will be squeezed w/200 sacks Class "H" during SWD Conversion.
5. Give the depth to and name of any overlying and/or underlying oil or gas zones (pools) in this area. Wolfcamp 9200'

Mexico F #4  
Proposed

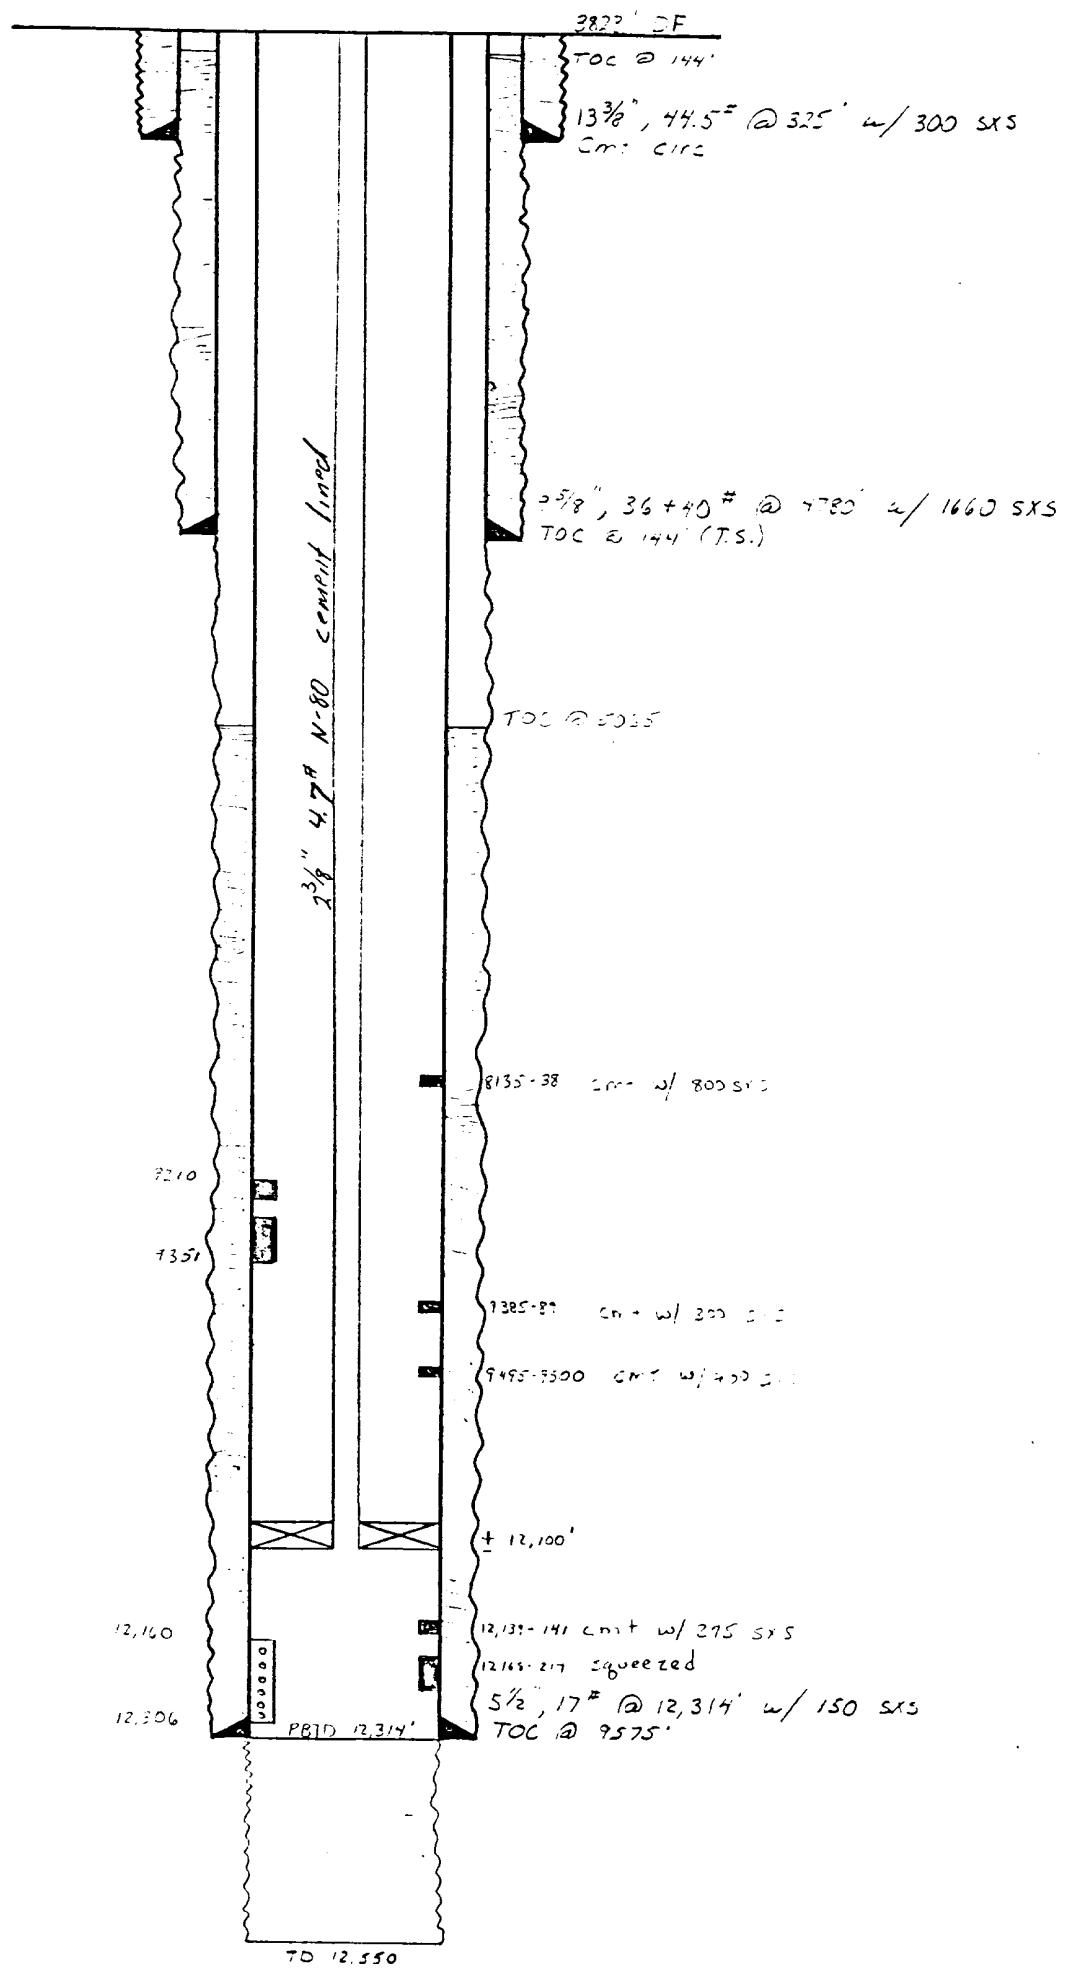

OFFSET OPERATORS  
MEXICO "F" LEASE  
LEA COUNTY, NEW MEXICO

Chevron USA, Inc.  
Box 670  
Hobbs, New Mexico 88240

Hondo Oil & Gas Co.  
Box 2819  
Dallas, Texas 75221


Mobil Producing TX & NM, Inc.  
Nine Greenway Plaza, Ste. 2700  
Houston, Texas 77046

Polaris Production Corp.  
Box 1749  
Midland, Texas 79702

Union Texas Petroleum  
4000 N. Big Spring, Ste. 500  
Midland, Texas 79705

SURFACE OWNER

State Owned Leased To: Dickinson Cattle Co.  
Box 3804  
Amarillo, Texas 79106

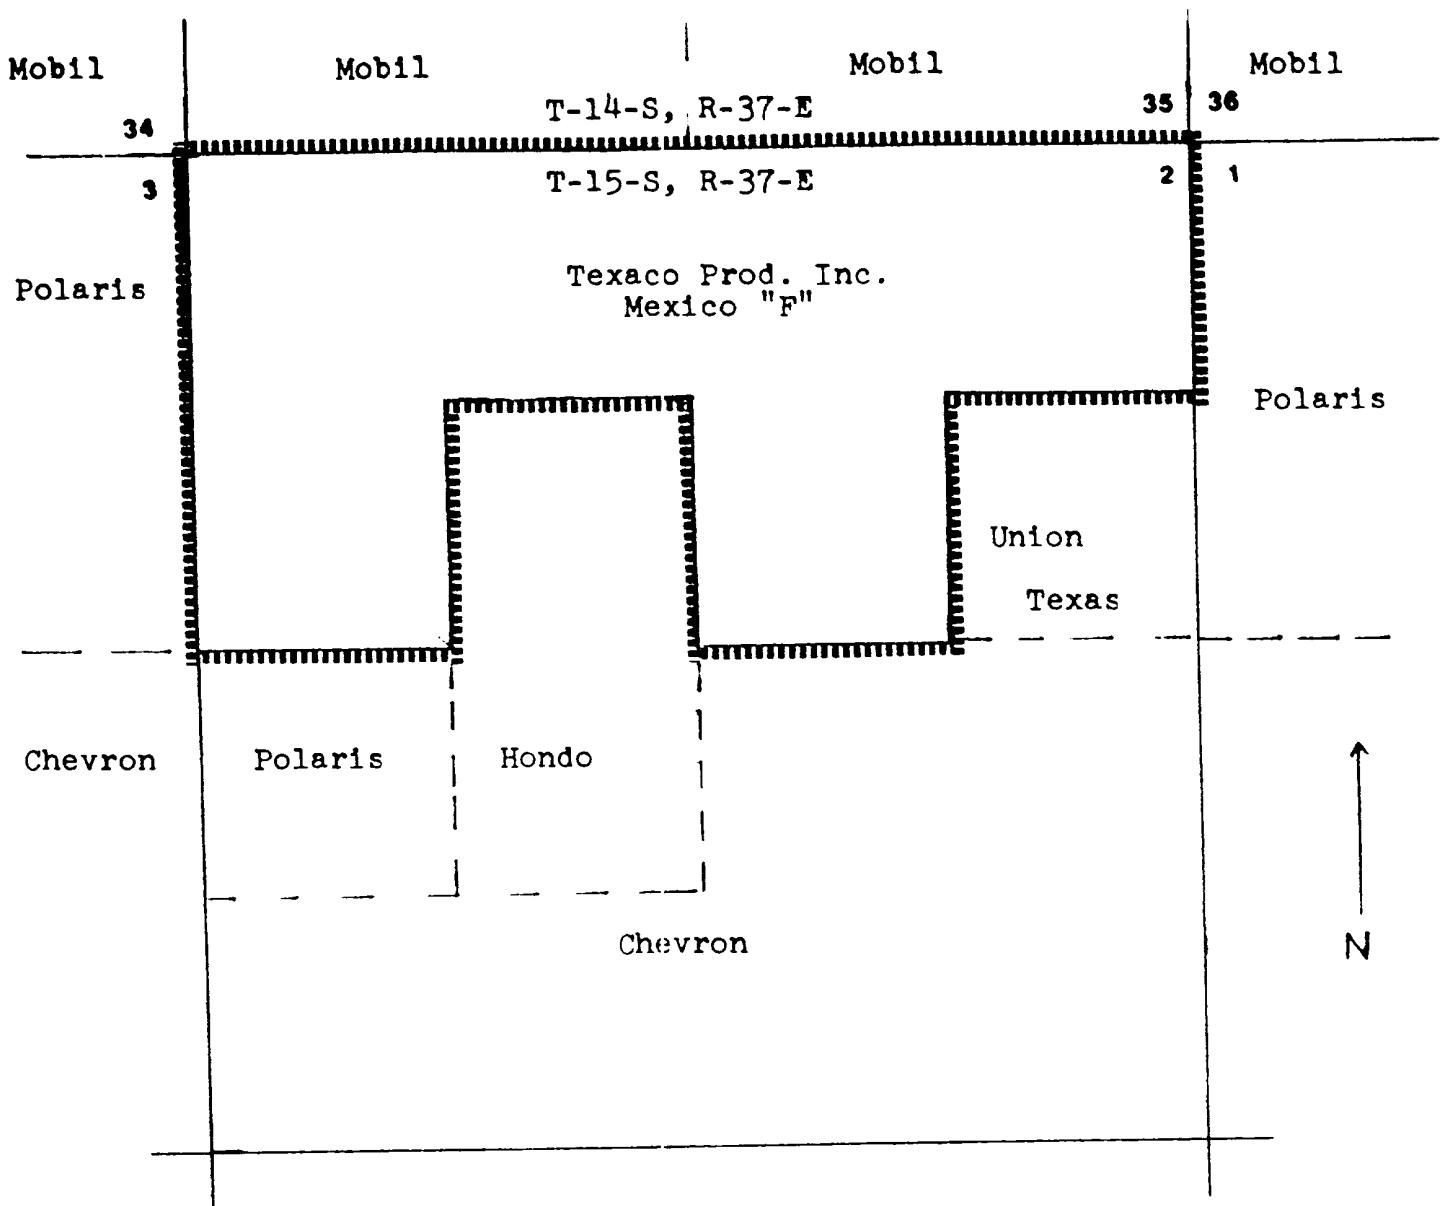

Texaco Producing Inc.  
 Mexico "F" Lease  
 Lea County, New Mexico  
 1" = 1000'

September 4, 1987

OFFSET OPERATORS  
(List Attached)

RE: Conversion to Salt Water Disposal  
Mexico "F" Well No. 4  
Unit Letter D, Sec. 2, T-15-S, R-37-E  
Lea County, New Mexico

Gentlemen:

This is to notify you, as an Offset Operator, that Texaco Producing Inc. is requesting the New Mexico Oil Conservation Division to approve disposal of water into the Devonian formation at a depth of 12,160'-12,306' into the referenced well. A copy of the legal notice and a plat are attached for your information.

Objections to this request or a request for hearing should be filed with the Oil Conservation Division, P. O. Box 2088, Santa Fe, New Mexico, 87501, within fifteen (15) days following receipt of this letter.

Yours very truly,



L. J. Seeman  
District Petroleum Engineer

LDR:JRB

Attachments



Texaco USA

P O Box 728  
Hobbs NM 88240  
505 393 7 91

September 4, 1987

Dickinson Cattle Company  
Box 3804  
Amarillo, Texas 79106

RE: Conversion to Salt Water Disposal  
Mexico "F" Well No. 4  
Lea County, New Mexico

Gentlemen:

In compliance with New Mexico Oil Conservation Division Rule 701.B.2, Texaco Producing Inc. hereby notifies you that an application to convert the referenced well to a salt water disposal has been submitted to the Oil Conservation Division. The water will be injected into the Devonian formation at a depth of 12,160'-12,306'. The well is located 660' FNL & 660' FWL of Section 2, T-15-S, R-37-E.

Only the surface area absolutely required will be used in operating the well. The well is cased and cemented in such a way that all surface and subsurface fresh waters will be protected.

Objections to this request or a request for hearing should be filed with the Oil Conservation Division, P. O. Box 2088, Santa Fe, New Mexico, 87501, within fifteen (15) days following receipt of this letter.

A copy of the legal notice and a map are attached for your information. If there are any questions, please do not hesitate to call this office.

Yours very truly,

A handwritten signature in black ink, appearing to read "J. A. Schaffer".

J. A. Schaffer  
District Operations Manager

LDR:JRB

Attachments

P-562 874 902

DR CERTIFIED MAIL  
U.S. POSTAL SERVICE  
WORLDWIDE AIR MAIL  
See Reverse

U.S.G.P.O. 153-506

Union Texas Petr.	
Street and No 4000 N. Big Spring Ste 500	
P.O. State and ZIP Code Midland, TX 79705	
Postage	39
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt showing to whom and Date Delivered	
Return Receipt showing Date and Address of Delivery	
TOTAL Postage and Fees	
Postmark or Date	

PS Form 3800, June 1985

P-562 874 898

RECEIVED - FCF CORP. 1005 Park  
Ave. at 10:00 AM - 1985  
See Reverse

U.S.G.P.O. 153-506

Chevron USA Inc	
Street and No Box 670	
P.O. State and ZIP Code Hobbs, N.M. 88240	
Postage	39
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt showing to whom and Date Delivered	
Return Receipt showing to whom and Address of Delivery	
TOTAL Postage and Fees	
Postmark or Date	

PS Form 3800 June 1985

P-562 874 900

RECEIVED - FCF CORP. 1005 Park  
Ave. at 10:00 AM - 1985  
See Reverse

Mobil Prod. Tx + NM Inc.  
Nine Greenway Plaza, Ste 2700  
P.O. Box and ZIP Code  
Houston, TX 77046

U.S.G.P.O. 153-506

Mobil Prod. Tx + NM Inc.	
Nine Greenway Plaza, Ste 2700	
P.O. Box and ZIP Code	
Postage	39
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt showing to whom and Date Delivered	
Return Receipt showing Date and Address of Delivery	
TOTAL Postage and Fees	
Postmark or Date	

PS Form 3800 June 1985

P-562 874 903

U.S. POSTAGE MAIL

Dickinson Cattle Co

Box 3804

Amarillo, TX 79106

39

U.S.G.P.O. 153-506

PS Form 3800 June 1985

P-562 874 901

RECEIVED - FCF CORP. 1005 Park

Ave. at 10:00 AM - 1985

See Reverse

Polaris Production Corp.  
Box 1749  
Midland, TX 79702

U.S.G.P.O. 153-506

PS Form 3800 June 1985

P-562 874 899

Hondo Oil + Gas Co  
Box 2819  
Dallas, TX 75221

U.S.G.P.O. 153-506

PS Form 3800 June 1985

P-562 874 902

DR CERTIFIED MAIL  
U.S. POSTAL SERVICE  
WORLDWIDE AIR MAIL  
See Reverse

U.S.G.P.O. 153-506

Union Texas Petr.	
Street and No 4000 N. Big Spring Ste 500	
P.O. State and ZIP Code Midland, TX 79705	
Postage	39
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt showing to whom and Date Delivered	
Return Receipt showing Date and Address of Delivery	
TOTAL Postage and Fees	
Postmark or Date	

PS Form 3800, June 1985

P-562 874 898

RECEIVED - FCF CORP. 1005 Park  
Ave. at 10:00 AM - 1985  
See Reverse

U.S.G.P.O. 153-506

Chevron USA Inc	
Street and No Box 670	
P.O. State and ZIP Code Hobbs, N.M. 88240	
Postage	39
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt showing to whom and Date Delivered	
Return Receipt showing to whom and Address of Delivery	
TOTAL Postage and Fees	
Postmark or Date	

PS Form 3800 June 1985

P-562 874 900

RECEIVED - FCF CORP. 1005 Park  
Ave. at 10:00 AM - 1985  
See Reverse

Mobil Prod. Tx + NM Inc.  
Nine Greenway Plaza, Ste 2700  
P.O. Box and ZIP Code  
Houston, TX 77046

U.S.G.P.O. 153-506

Mobil Prod. Tx + NM Inc.	
Nine Greenway Plaza, Ste 2700	
P.O. Box and ZIP Code	
Postage	39
Certified Fee	
Special Delivery Fee	
Restricted Delivery Fee	
Return Receipt showing to whom and Date Delivered	
Return Receipt showing Date and Address of Delivery	
TOTAL Postage and Fees	
Postmark or Date	

PS Form 3800 June 1985

P-562 874 903

U.S. POSTAGE MAIL

Dickinson Cattle Co

Box 3804

Amarillo, TX 79106

39

U.S.G.P.O. 153-506

PS Form 3800 June 1985

P-562 874 901

RECEIVED - FCF CORP. 1005 Park

Ave. at 10:00 AM - 1985

See Reverse

Polaris Production Corp.  
Box 1749  
Midland, TX 79702

U.S.G.P.O. 153-506

PS Form 3800 June 1985

P-562 874 899

Hondo Oil + Gas Co  
Box 2819  
Dallas, TX 75221

U.S.G.P.O. 153-506

PS Form 3800 June 1985

NL TREATING CHEMICALS  
NL INDUSTRIES, INC.

SCALING TENDENCIES OF WATERS

COMPANY: TEXACO PRODUCING  
SAMPLE POINT: WELL #9 (*WOLFcamp*)  
LOCATION: MEXICO F  
DATE: 7/23/87

WATER ANALYSIS (MG/L):

SODIUM	31031.6
CALCIUM	2440.0
MAGNESIUM	292.8
CHLORIDE	50000.0
SULFATE	2250.0
BICARBONATE	1165.1
IRON	1.6
BARIUM	0.0
STRONTIUM	0.0

pH: 6.6  
IONIC STRENGTH = 1.5825

INDEX VALUES GREATER THAN ZERO INDICATE SCALING CONDITIONS  
INDEX VALUES OF ZERO OR LESS INDICATE A STABLE WATER

TEMP.	CALCITE INDEX	GYPSUM INDEX	ANHYDRITE INDEX	BARITE INDEX	STRONTIUM INDEX
60	0.18	-0.21	-0.51	-42.00	-1.00
80	0.28	-0.22	-0.41	-42.11	-1.00
100	0.41	-0.22	-0.32	-42.22	-1.00
120	0.59	-0.23	-0.24	-42.34	-1.00
140	0.81	-0.22	-0.15	-42.45	-1.00
160	1.07	-0.22	-0.06	-42.56	-1.00
180	1.38	-0.21	0.05	-42.67	-1.00
200	1.73	-0.20	0.16	-42.78	-1.00
220	2.13	-0.19	0.28	-42.87	-1.00
240	2.58	-0.17	0.41	-42.94	-1.00
260	3.07	-0.15	0.55	-42.95	-1.00

## WATER ANALYSIS REPORT



NL Treating Chemicals/NL Industries, Inc.  
P. O. Box 4305 Houston, Texas 77210

				SHEET NUMBER						
COMPANY <u>TEXaco Producing</u>				DATE <u>7/23/87</u>						
FIELD		COUNTY OR PARISH <u>LEA</u>		STATE <u>N.M.</u>						
LEASE OR UNIT <u>Mexico F</u>		WELL IS NAME OR NO. <u>#9</u>		WATER SOURCE (FORMATION)						
DEPTH, FT.	BHT, F	SAMPLE SOURCE <u>Wellhead</u>	TEMP, F	WATER, BBL DAY	OIL, BBL DAY					
DATE SAMPLED <u>7/23/87</u>		TYPE OF WATER <input checked="" type="checkbox"/> PRODUCED <input type="checkbox"/> SUPPLY <input type="checkbox"/> WATERFLOOD		<input type="checkbox"/> SALT WATER DISPOSAL						
<b>WATER ANALYSIS PATTERN</b> (NUMBER BESIDE ION SYMBOL INDICATES me/l* SCALE UNIT)										
Na <sup>+</sup>	20	15	10	5	0	5	10	15	20	C1 <sup>-</sup>
Ca <sup>++</sup>										HCO <sub>3</sub> <sup>-</sup>
Mg <sup>++</sup>										SO <sub>4</sub> <sup>=</sup>
Fe <sup>+++</sup>										CO <sub>3</sub> <sup>=</sup>

## DISSOLVED SOLIDS

## DISSOLVED GASES

CATIONS	me/l*	me/l*	Hydrogen Sulfide, H <sub>2</sub> S	mg/l*
Total Hardness	<u>146</u>			
Calcium, Ca <sup>++</sup>	<u>122</u>	<u>34.0</u>	Carbon Dioxide, CO <sub>2</sub>	mg/l*
Magnesium, Mg <sup>++</sup>	<u>24</u>	<u>292.8</u>	Oxygen, O <sub>2</sub>	mg/l*
Iron (Total) Fe <sup>+++</sup>	<u>0.1</u>	<u>1.6</u>		
Barium, Ba <sup>++</sup>				
Sodium, Na <sup>+</sup> (calc.)	<u>1349.2</u>	<u>31031.6</u>		

## PHYSICAL PROPERTIES

ANIONS	pH	<u>6.65</u>
Chloride, Cl <sup>-</sup>	Eh (Redox Potential)	<u>MV</u>
Sulfate, SO <sub>4</sub> <sup>=</sup>	Specific Gravity	
Carbonate, CO <sub>3</sub> <sup>=</sup>	Turbidity, JTU Units	
Bicarbonate, HCO <sub>3</sub> <sup>-</sup>	Total Dissolved Solids (calc.)	<u>87514</u> mg/l*
Hydroxyl, OH <sup>-</sup>	Stability Index @	<u>F</u>
Sulfide, S <sup>=</sup>	@	<u>F</u>
	CaSO <sub>4</sub> Solubility @	<u>F</u> mg/l*
	@	<u>F</u> mg/l*
	Max. CaSO <sub>4</sub> Possible (calc.)	mg/l*
	Max. BaSO <sub>4</sub> Possible (calc.)	mg/l*
	Residual Hydrocarbons	ppm(Vol/Vol)

## SUSPENDED SOLIDS (QUALITATIVE)

R - 0.12 @ 68°

Iron Sulfide  Iron Oxide  Calcium Carbonate  Acid Insoluble

## REMARKS AND RECOMMENDATIONS:

Complete H<sub>2</sub>O + 7c  
Background Info.

\* NOTE: me/l and mg/l are commonly used interchangeably for epm and ppm respectively. Where epm and ppm are used, corrections should be made for specific gravity.

BTG ENGINEER <u>Mike Brown</u>	DIST. NO. <u>821</u>	ADDRESS <u>P.O. Box 1697 Hobbs, N.M.</u>	OFFICE PHONE <u>362-1518</u>	HOME PHONE
ANALYZED <u>7/23/87</u>	DATE <u>7/23/87</u>	DISTRIBUTION <input type="checkbox"/> CUSTOMER	AREA OR <u>1</u>	DISTRICT OFFICE <u>1</u>
SUPERVISOR <u>John C. Brown</u>				

NL TREATING CHEMICALS  
NL INDUSTRIES, INC.

SCALING TENDENCIES OF WATERS

COMPANY: TEXACO PRODUCING  
SAMPLE POINT: WELL #3 (DEVONIAN)  
LOCATION: MEXICO F  
DATE: 7/23/87

WATER ANALYSIS (MG/L):

SODIUM	26555.8
CALCIUM	2760.0
MAGNESIUM	268.4
CHLORIDE	45500.0
SULFATE	1075.0
BICARBONATE	573.4
IRON	0.4
BARIUM	0.0
STRONTIUM	0.0

pH: 7.2  
IONIC STRENGTH = 1.4062

INDEX VALUES GREATER THAN ZERO INDICATE SCALING CONDITIONS  
INDEX VALUES OF ZERO OR LESS INDICATE A STABLE WATER

TEMP.	CALCITE INDEX	GYPSUM INDEX	ANHYDRITE INDEX	BARITE INDEX	STRONTIUM INDEX
60	0.52	-0.45	-0.74	-41.96	-1.00
80	0.61	-0.46	-0.64	-42.07	-1.00
100	0.75	-0.46	-0.55	-42.19	-1.00
120	0.92	-0.46	-0.47	-42.30	-1.00
140	1.14	-0.46	-0.38	-42.42	-1.00
160	1.40	-0.45	-0.28	-42.53	-1.00
180	1.70	-0.44	-0.18	-42.64	-1.00
200	2.04	-0.43	-0.07	-42.74	-1.00
220	2.44	-0.41	0.06	-42.82	-1.00
240	2.87	-0.39	0.19	-42.88	-1.00
260	3.36	-0.37	0.33	-42.88	-1.00

RECEIVED  
SEP 11 1987  
OCD  
HOBBS OFFICE

## WATER ANALYSIS REPORT



NL Treating Chemicals/NL Industries, Inc  
P O Box 4305 Houston, Texas 77210

				SHEET NUMBER						
COMPANY <b>TEXACO Producing</b>	COUNTY OR PARISH <b>Lea</b>			DATE <b>7/23/87</b>						
FIELD <b>MEXICO F</b>	WELL(S) NAME OR NO. <b># 3</b>		WATER SOURCE (FORMATION)							
DEPTH, FT.	BHT, F	SAMPLE SOURCE <b>Well head</b>	TEMP, F	WATER, BBL/DAY	OIL, BBL/DAY					
DATE SAMPLED <b>7/23/87</b>		TYPE OF WATER <input checked="" type="checkbox"/> PRODUCED <input type="checkbox"/> SUPPLY <input type="checkbox"/> WATERFLOOD <input type="checkbox"/> SALT WATER DISPOSAL								
<b>WATER ANALYSIS PATTERN</b> (NUMBER BESIDE ION SYMBOL INDICATES me/l* SCALE UNIT)										
Na <sup>+</sup>	20	15	10	5	0	5	10	15	20	Cl <sup>-</sup>
Ca <sup>++</sup>										HCO <sub>3</sub> <sup>-</sup>
Mg <sup>++</sup>										SO <sub>4</sub> <sup>=</sup>
Fe <sup>+++</sup>										CO <sub>3</sub> <sup>=</sup>

## DISSOLVED SOLIDS

## DISSOLVED GASES

CATIONS	me/l*	mg/l*	Hydrogen Sulfide, H <sub>2</sub> S	mg/l*
Total Hardness	<u>760</u>			
Calcium, Ca <sup>++</sup>	<u>138</u>	<u>3760</u>	Carbon Dioxide, CO <sub>2</sub>	mg/l*
Magnesium, Mg <sup>++</sup>	<u>22</u>	<u>268.4</u>	Oxygen, O <sub>2</sub>	mg/l*
Iron (Total) Fe <sup>+++</sup>		<u>0.4</u>		
Barium, Ba <sup>++</sup>				
Sodium, Na <sup>+</sup> (calc.)	<u>1154.6</u>	<u>26555.8</u>	PHYSICAL PROPERTIES	
ANIONS			pH	<u>7.2</u>
Chloride, Cl <sup>-</sup>	<u>1281.7</u>	<u>45600</u>	Eh (Redox Potential)	MV
Sulfate, SO <sub>4</sub> <sup>=</sup>	<u>22.4</u>	<u>1075</u>	Specific Gravity	
Carbonate, CO <sub>3</sub> <sup>=</sup>			Turbidity, JTU Units	
Bicarbonate, HCO <sub>3</sub> <sup>-</sup>	<u>9.4</u>	<u>573.4</u>	Total Dissolved Solids (calc.)	<u>76750</u> mg/l*
Hydroxyl, OH <sup>-</sup>	<u>1.1</u>	<u>17.9</u>	Stability Index @ <u>60</u> F	
Sulfide, S <sup>=</sup>			@ <u>60</u> F	
			CaSO <sub>4</sub> Solubility @ <u>60</u> F	mg/l*
			@ <u>60</u> F	mg/l*
			Max. CaSO <sub>4</sub> Possible (calc.)	mg/l*
			Max. BaSO <sub>4</sub> Possible (calc.)	mg/l*
			Residual Hydrocarbons	ppm(Vol/Vol)

## SUSPENDED SOLIDS (QUALITATIVE)

R - 0.13 @ 68°Iron Sulfide  Iron Oxide  Calcium Carbonate  Acid Insoluble 

\* NOTE: me/l and mg/l are commonly used interchangeably for ppm and ppb respectively. Where ppm and ppb are used, corrections should be made for specific gravity.

## REMARKS AND RECOMMENDATIONS:

Complete H<sub>2</sub>O + Fe  
Background Info.

BTG ENGINEER <b>Mike Brown</b>	DIST. NO. <b>821</b>	ADDRESS <b>PO Box 1697 Hobbs, N.M.</b>	OFFICE PHONE <b>392-1518</b>	HOME PHONE
ANALYZED <b>P.C.</b>	DATE <b>7/23/87</b>	DISTRIBUTION <input type="checkbox"/> CUSTOMER	AREA OR DISTRICT OFFICE	

## NL INDUSTRIES, INC.

## SCALING TENDENCIES OF WATERS

COMPANY: TEXACO PRODUCING  
 SAMPLE POINT: WINDMILL  
 LOCATION: MEXICO F  
 DATE: 7/23/87

## WATER ANALYSIS (MG/L):

SODIUM	361.1
CALCIUM	68.0
MAGNESIUM	75.6
CHLORIDE	700.0
SULFATE	25.0
BICARBONATE	311.1
IRON	0.1
BARIUM	0.0
STRONTIUM	0.0

PH: 7.7  
 IONIC STRENGTH = 0.0304

INDEX VALUES GREATER THAN ZERO INDICATE SCALING CONDITIONS  
 INDEX VALUES OF ZERO OR LESS INDICATE A STABLE WATER

TEMP.	CALCITE INDEX	GYPSUM INDEX	ANHYDRITE INDEX	BARITE INDEX	STRONTIUM INDEX
60	0.18	-2.47	-2.72	-40.69	-1.00
80	0.30	-2.51	-2.65	-40.83	-1.00
100	0.41	-2.53	-2.58	-40.95	-1.00
120	0.53	-2.53	-2.49	-41.04	-1.00
140	0.65	-2.52	-2.40	-41.11	-1.00
160	0.78	-2.50	-2.29	-41.16	-1.00
180	0.92	-2.47	-2.16	-41.19	-1.00
200	1.06	-2.43	-2.03	-41.20	-1.00
220	1.22	-2.39	-1.88	-41.20	-1.00
240	1.38	-2.34	-1.73	-41.19	-1.00
260	1.55	-2.30	-1.56	-41.17	-1.00



RECEIVED  
SEP 11 1987  
OCD  
HOBBS OFFICE

## AFFIDAVIT OF PUBLICATION

State of New Mexico,  
County of Lea.

I,

Mark C. Keeling

of the Hobbs Daily News-Sun, a daily newspaper published at Hobbs, New Mexico, do solemnly swear that the clipping attached hereto was published once a week in the regular and entire issue of said paper, and not a supplement thereof for a period

of \_\_\_\_\_

One \_\_\_\_\_ weeks.  
Beginning with the issue dated

August 24, 1987  
and ending with the issue dated

August 24, 1987

Mark C. Keeling  
Business Manager

Sworn and subscribed to before

me this 25 day of

August, 1987

Vera Murphy,  
Notary Public.

My Commission expires \_\_\_\_\_

Nov. 14, 1988  
(Seal)

This newspaper is duly qualified to publish legal notices or advertisements within the meaning of Section 3, Chapter 167, Laws of 1937, and payment of fees for said publication has been made.

### 10 LEGAL NOTICE

AUGUST 24, 1987

Notice is hereby given of the application of Texaco Producing Int., Attention: L. J. Seeman, District Petroleum Engineer, P. O. Box 728, Hobbs, New Mexico, 88240, Telephone (505) 393-7191, to the Oil Conservation Division, New Mexico Energy & Minerals Department, for approval of the following injection well(s) for the purpose of salt water disposal.

Well(s) No(s).: 4

Lease/Unit Name: Mexican "F"

Location: 660' FNL & 660' FWL, Unit Letter D, Section 2, T-15-S, R-37-E

Lea County, New Mexico  
The injection formation is Devonian at a depth of 12,140 feet below the surface of the ground. Expected maximum injection rate is 1,000 barrels per day, and expected maximum injection pressure is 100 pounds per square inch. Interested parties must file objections or requests for hearing with the Oil Conservation Division, P. O. Box 2088, Santa Fe, New Mexico, 87501, within fifteen (15) days of this publication.