

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

N M Oil Corp
P 1980
Hobb NM 98241

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

CONOCO INC.

3. Address and Telephone No.

10 DESTA DR. STE. 100W, MIDLAND, TX. 79705-4500 (915) 686-5424

4. Location of Well (Footage, Sec., T. R. M. or Survey Description)

25' FNL & 50' FWL, Sec. 22, T-17S, R-32E

5. Lease Designation and Serial No.
4C-229509(6)
LC 02909B

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

MCA Unit

8. Well Name and No.

#89

9. API Well No.

30-025-12796

10. Field and Pool, or Exploratory Area

Maljamar Grayburg/SA

11. County or Parish, State

Lea, NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Repon
☐ Final Abandonment Notice

TYPE OF ACTION

- ☒ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other

- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracrunng
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

Note: Repon result of multiple completion well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

It is proposed to plug and abandon this well according to the following procedure and attached diagrams:

1. Set cement retainer @ 3200' and squeeze 50 sxs of cement below retainer
2. Spot 35' cement on top of retainer.
3. Circulate hole with mud.
4. Spot 25 sxs cement 1925'-2070'.
5. Perforate 7" casing at 1000'.
6. Set cement retainer at 900' and squeeze 100 sxs cement into annulus with 8-5/8" casing.
7. Spot 10 sxs cement as surface plug.
8. Install dryhole marker and clean location.

RECEIVED
1997 SEP - 3 P 10:22
BUREAU OF LAND MGMT.
ROSWELL OFFICE

14. I hereby certify that the foregoing is true and correct

Signed

Jerry W. Hoover

Title

Sr. Conservation Coordinator

Date

9/2/97

(This space for Federal or State office use)

Approved by

ORIG. SCD ALEXIS C SWOSOW

Title

PETROLEUM ENGINEER

Date


SEP 04 1997

Conditions of approval if any

CURRENT WELLBORE

7/15/97

Elev. = 4029' GR +1' KB

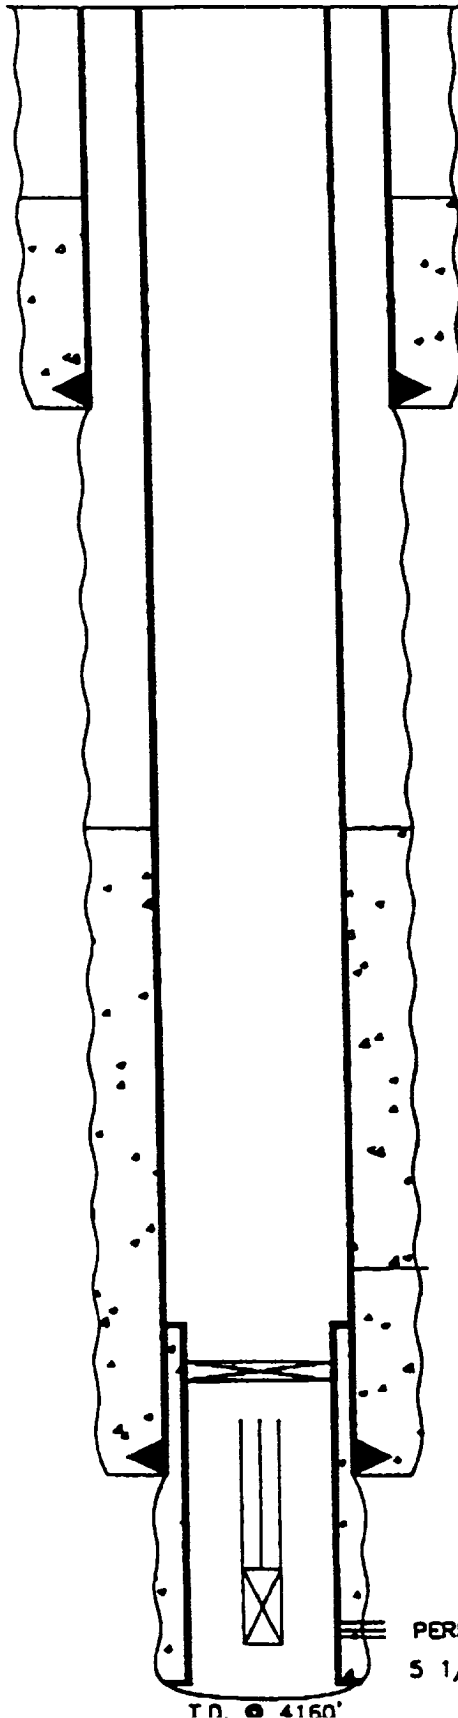

948' - 8 5/8" Casing. Cemented w/75 sxs.

T.O.C. @ 2000' (EST.)

Hole in 7" @ 3276'

C.I.B.P. @ 3375'

3746' - 7" , 20# Casing. Cemented w/160 Sxs

2 7/8" TUBING AND PUMP STUCK IN HOLE

TOP OF FISH @ 3391'

UNABLE TO RECOVER FISH

PERFS 3814'-4136'

5 1/2" LINER 3354'-4160' CEMENTED
W/80 SXS


T.D. @ 4160'

CONOCO, INC.
M.C.A. Unit #89
25' FNL & 50' FWL
Sec. 22, T-17S, R-32E
Log Control

PROPOSED PLUG AND ABANDONMENT

7/15/97

Elev. = 4029' GR +1' KB

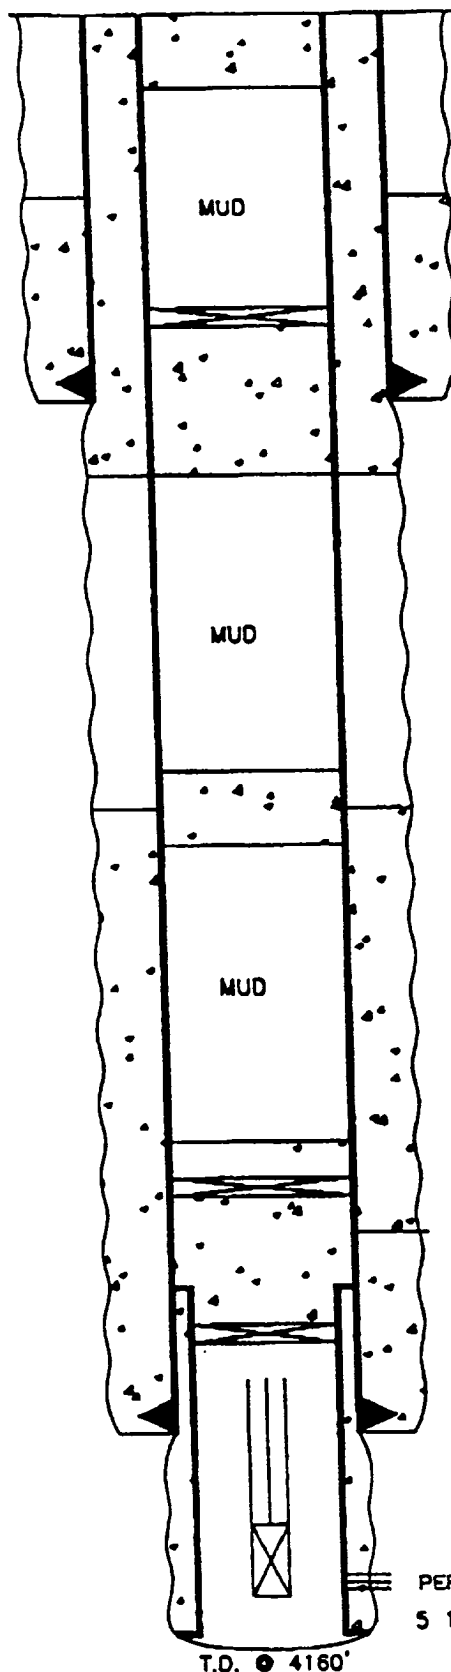

SPOT 10 SXS CEMENT SURFACE PLUG

CEMENT RETAINER @ 900'
SQUEEZE 100 SXS CEMENT THRU RETAINER AND BETWEEN 7" & 8 5/8"

948' - 8 5/8" Casing. Cemented w/75 sxs.

PERFORATE 7" @ 1000'

SPOT 25 SXS CEMENT 1925'-2070'
T.O.C. @ 2000' (EST.)

SPOT 35' CEMENT ON TOP OF RETAINER
CEMENT RETAINER @ 3200'
SQUEEZE 50 SXS CEMENT THRU RETAINER
Hole in 7" @ 3276'

C.I.B.P. @ 3375'

3746' - 7" . 20# Casing. Cemented w/160 Sxs

2 7/8" TUBING AND PUMP STUCK IN HOLE

TOP OF FISH @ 3391'

UNABLE TO RECOVER FISH

PERFS 3814'-4136'

5 1/2" LINER 3354'-4160' CEMENTED
w/80 SXS

T.D. @ 4160'

CONOCO, INC.
M.C.A. Unit #89
25' FNL & 50' FWL
Sec. 22, T-17S, R-32E
Lea County, NM