


# OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## MISCELLANEOUS REPORTS ON WELLS

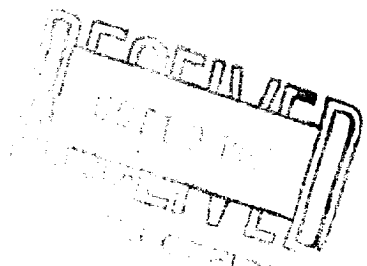

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL	x
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL	x	REPORT ON PULLING OR OTHERWISE ALTERING CASING	
REPORT ON RESULT OF TEST OF CASING SHUT-OFF		REPORT ON DEEPENING WELL	
REPORT ON RESULT OF PLUGGING OF WELL			

October 6, 1949

Hobbs, N.M.

Date

Place

OIL CONSERVATION COMMISSION,  
SANTA FE, NEW MEXICO

Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the Sinclair Oil & Gas Co. W. D. Grimes Well No. 1 in the

Company or Operator

Lease

of Sec. 38

18

R. 38

N. M. P. M.,

Hobbs Field,

Lea County.

The dates of this work were as follows: Sept. 10 to Oct. 5, 1949

Notice of intention to do the work was (was not) submitted on Form C-102 on Sept. 8 1949

and approval of the proposed plan was (was not) obtained. (Cross out incorrect words.)

### DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

Moved in Rotary tools Sept. 10, 1949 - Pulled tubing - Total depth 4191 - 7" O D Casing 3942 - Took Deviation test of hhole - Ran Dowell Spinner - formation took 6 1/2 Barrels per minute @ ~~4100~~ 3994 to 4102' - Sept. 16th & 19th tested casing with 500# pump pressure for 30 Min. No leak in casing - Drilled to bottom - Plugged back W/Galseal from 4191 to 4173 - Plugged back W/Galseal from 4173 to 4139 - With Hydromite from 4139 to 4107 Ran tubing and swabbed 129 hours a total of 2242 barrels of fluid of which 497 barrels was oil - Killed well & Pulled tubing - Plugged back W/Hydromite from 4107 to 4089' Swabbed 25 Hrs. - Acidized W/1000 Gal. Dowell XX - Completed @ 79 Bbls. per 24 Hrs. with no water.

Witnessed by R. A. Henderson Dowell Incorporated Engineer

Name

Company

Title

Subscribed and sworn before me this \_\_\_\_\_

6th day of Oct. 1949

*[Signature]*

Notary Public

I hereby swear or affirm that the information given above is true and correct.

Name [Signature]

Position Dist. Supt.

Representing Sinclair Oil & Gas Co.

Company or Operator

My commission expires 2-4-50

Address Box 1427 Hobbs, N.M.

Remarks:

APPROVED

Date \_\_\_\_\_

*[Signature]*

Name

Title

MEMORANDUM FOR THE RECORD  
DATE: 10/10/54  
SUBJECT: [Illegible]

[Extremely faint and illegible typed text, likely the main body of the memorandum.]

[Illegible handwritten notes or signatures at the bottom of the page.]