

Submit 3 Copies To Appropriate District Office

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Ave., Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Form C-103

Revised March 25, 1999

WELL API NO.

30-025-21930

5. Indicate Type of Lease

STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

E-1816

7. Lease Name or Unit Agreement Name:

Gallagher State

8. Well No. #1

9. Pool name or Wildcat

Vacuum, Lower Wolfcamp N.

SUNDRY NOTICES AND REPORTS ON WELLS  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:

Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Gruy Petroleum Management

3. Address of Operator

P. O. Box 140907 Irving, TX 75014-0907

4. Well Location

Unit Letter A : 660 feet from the NORTH line and 660 feet from the EAST line

Section 3

Township 17-S Range 34-E

NMPM

LEA County

10. Elevation (Show whether DR, RKB, RT, GR, etc.)

4061' GL, 4077' RKB

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐

TEMPORARILY ABANDON ☒ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐

CASING TEST AND CEMENT JOB ☐

OTHER: ☐

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Gruy Petroleum Management Co., respectfully request approval to Temporarily Abandon this inactive well as per the attached procedure:

1. MIRU well service rig.
2. PU & RIH w/ muleshoe on tbg to +/- 10650' - note possible csg part @ 5772'.
3. Spot 200' cmt plug 10650-10450'. PU. WOC. Tag plug.
4. Load hole w/ 9.5 ppg gel mud to 5100'.
5. Spot 100' cmt plug from 5825-5725'. POH.
6. RIH w/ CIBP & set +/- 5100'. Spot 25 sx cmt on plug.
7. Circ hole w/ inhibited fresh wtr. POH w/ tbg.
8. Test plug and casing to 500 psi.
9. RD and move off well.
10. Leave well as TA'd.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Reggie Reston TITLE Production Supt. DATE 8/29/02

Type or print name Reggie Reston

(This space for State use)

ORIGINAL SIGNED BY

GARY W. WINK

OC FIELD REPRESENTATIVE II/STAFF MANAGER

Telephone No. 505-393-233

APPROVED BY

Conditions of approval, if any:

DATE AUG 26 2002

# GRUY PETROLEUM MANAGEMENT CO.

VACUUM NORTH  
SPUDED 11/23/66

Gallagher State #1

API 30-025-21930

## PROPOSED COMPLETION

Sherry Reid Carroll 8/22/02

KB: 4077'

CH: -

GL: 4061'

660' FNL & 660' FEL

Sec 3, T-17-S, R-34-E

Unit Letter A

Lea County, New Mexico

### Casing Strings:

13-3/8" (17-1/2" hole)

@ 379' w/ 310 sx cmt

TOC @ surface - circ

8-5/8" (11" hole)

@ 3324' w/ 345 sx cmt

TOC @ 1690' (temp survey)

4-1/2" (7-7/8" hole), 11.6 & 13.5#

@ 10,997' w/ DV @ 4703'

1st stg - 525 sx - TOC 8480' calc

2nd stg - 450 sx - TOC 3730' temp

Perf sqz holes @ 1750' & circ cmt to  
surf (pump'd 500 sx)

CIBP +/- 5100' w/ 25 sx cmt

Csg leaks @ 5300' sqz'd w/ 225 sx

Spot 100' cmt plug 5725-5825'


Csg appears to be parted @ 5772'

### Wolfcamp Perfs:

10689, 10693, 10697, 10699' (2 spf)

1/67

200' cmt plug 10450-10650'

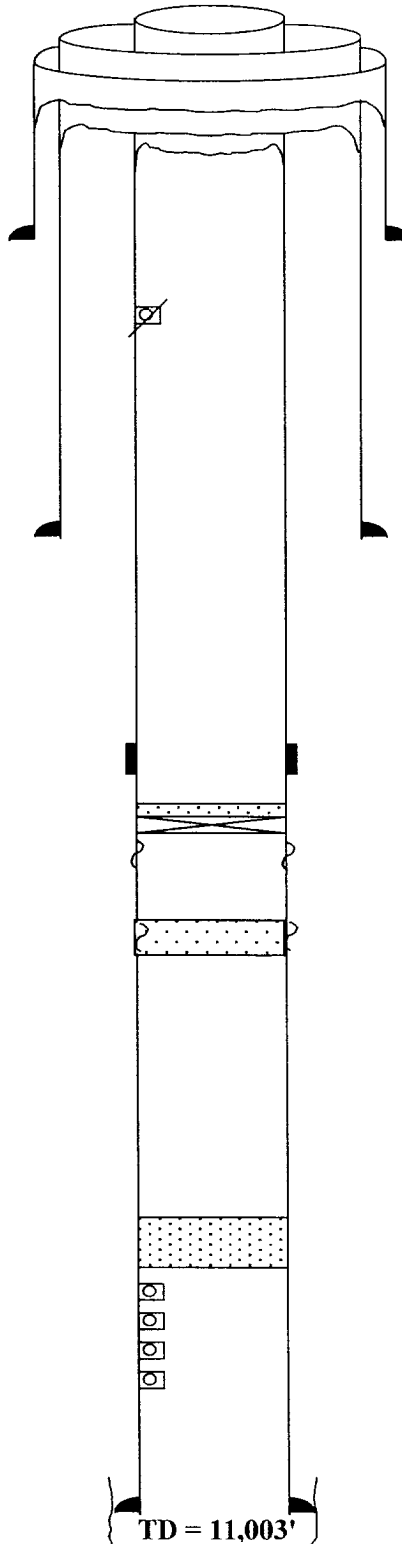

TD = 11,003'

# GRUY PETROLEUM MANAGEMENT CO.

VACUUM NORTH  
SPUDED 11/23/66

Gallagher State #1

API 30-025-21930

## CURRENT COMPLETION

Sherry Reid Carroll 8/22/02

KB: 4077'

CH: -

GL: 4061'

660' FNL & 660' FEL

Sec 3, T-17-S, R-34-E

Unit Letter A

Lea County, New Mexico

### Casing Strings:

13-3/8" (17-1/2" hole)

@ 379' w/ 310 sx cmt

TOC @ surface - circ

8-5/8" (11" hole)

@ 3324' w/ 345 sx cmt

TOC @ 1690' (temp survey)

4-1/2" (7-7/8" hole), 11.6 & 13.5#

@ 10,997' w/ DV @ 4703'

1st stg - 525 sx - TOC 8480' calc

2nd stg - 450 sx - TOC 3730' temp

Perf sqz holes @ 1750' & circ cmt to  
surf (pump'd 500 sx)

Csg leaks @ 5300' sqz'd w/ 225 sx

Csg appears to be parted @ 5772'

### Wolfcamp Perfs:

10689, 10693, 10697, 10699' (2 spf)

1/67

