

Submit 3 Copies
to Appropriate
District Office

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-103
Revised 1-1-89

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

OIL CONSERVATION DIVISION
P.O. Box 2088
Santa Fe, New Mexico 87504-2088

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

WELL API NO.	30-025-02080
5. Indicate Type of Lease	STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No.	

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:
 OIL WELL GAS WELL OTHER

2. Name of Operator Mobil Producing TX & NM Inc.*

3. Address of Operator Mobil Exploration & Producing US Inc. as agent for MPTM

P.O. Box 633, Midland, TX 79702

4. Well Location

Unit Letter P : 660 Feet From The South Line and 660 Feet From The East Line

Section 23 Township T-17-S Range 34-E NMPM Lea County

10. Elevation (Show whether DF, RKB, RT, GR, etc.) KB -4019

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK PLUG AND ABANDON
 TEMPORARILY ABANDON CHANGE PLANS
 PULL OR ALTER CASING
 OTHER:

SUBSEQUENT REPORT OF:

REMEDIAL WORK ALTERING CASING
 COMMENCE DRILLING OPNS. PLUG AND ABANDONMENT
 CASING TEST AND CEMENT JOB
 OTHER:

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

- MIRU PU. DIG PIT. FLOW WELL BACK TO PIT. ND WH. NU BOP.
- POOH W/ 133 JTS 2-3/8" 10 RD 4.7# J-55 TBG. RIH W/ WS TO 2750'. LOAD HOLE W/ 10 PPG GELLED BRINE. SPOT 30 SX CLASS C NEAT CMT PLUG ACROSS SALT BASE @ 2700' AND TOC @ 2690' FROM 2750-2640'.
- PUH TO 1747'. CUT AND PULL 7" CSG OR PERFORATE AND SQUEEZE 50 SX CLASS C NEAT CMT PLUG ACROSS SALT TOP @ 1697' FROM 1747-1647'. PLUG MUST BE TAGGED!
- PUH TO 880'. SPOT 50 SX CLASS C NEAT CMT PLUG ACROSS 10-3/4" CSG SHOE @ 830' FROM 880-780'. (IF 7" CSG NOT RECOVERED, PERFORATE AND SQUEEZE 50 SX CLASS C NEAT CMT PLUG). PLUG MUST BE TAGGED!
- PUH TO 30'. SPOT 15 SX CLASS C NEAT CMT PLUG FROM 30'-SURFACE. POOH W/ WS.
- ND BOP. RD PU. DIG OUT CELLAR AND CUT CSG 3' BELOW SURFACE. WELD STEEL PLATE ON CSG STUB. ERECT P&A MARKER WITH WELL NAME AND PLUGGED DATE. FILL CELLAR AND CLEAN SURFACE LOCATION.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Kaye Pollock TITLE Regulatory Technician DATE 08-04-93
 TYPE OR PRINT NAME Kaye Pollock TELEPHONE NO. 915-688-2584

(This space for State Use)

Orig. Signed by
Paul Kautz
Geologist

APPROVED BY _____ TITLE _____ DATE _____

CONDITIONS OF APPROVAL, IF ANY:

THE COMMISSION MUST BE NOTIFIED 24 HOURS PRIOR TO THE BEGINNING OF PLUGGING OPERATIONS FOR THE C-103 TO BE APPROVED.

AUG 09 1993

BRIDGES STATE # 41
VACUUM GRAYBURG (SAN ANDRES) FIELD
LEA COUNTY, NEW MEXICO


RECOMMENDED WORKOVER PROCEDURE

1. MIRU PU. DIG PIT. FLOW WELL BACK TO PIT. ND WH. NU BOP.
2. POOH W/ 133 JTS 2-3/8" 10 RD 4.7# J-55 TBG. RIH W/ WS TO 2750'. LOAD HOLE W/ 10 PPG GELLED BRINE. SPOT 30 SX CLASS C NEAT CMT PLUG ACROSS SALT BASE @ 2700' AND TOC @ 2690' FROM 2750-2640'.
3. PUH TO 1747'. CUT AND PULL 7" CSG OR PERFORATE AND SQUEEZE 50 SX CLASS C NEAT CMT PLUG ACROSS SALT TOP @ 1697' FROM 1747-1647'. **PLUG MUST BE TAGGED!**
4. PUH TO 880'. SPOT 50 SX CLASS C NEAT CMT PLUG ACROSS 10-3/4" CSG SHOE @ 830' FROM 880-780'. (IF 7" CSG NOT RECOVERED, PERFORATE AND SQUEEZE 50 SX CLASS C NEAT CMT PLUG). **PLUG MUST BE TAGGED!**
5. PUH TO 30'. SPOT 15 SX CLASS C NEAT CMT PLUG FROM 30'-SURFACE. POOH W/ WS.
6. ND BOP. RD PU. DIG OUT CELLAR AND CUT CSG 3' BELOW SURFACE. WELD STEEL PLATE ON CSG STUB. ERECT P&A MARKER WITH WELL NAME AND PLUGGED DATE. FILL CELLAR AND CLEAN SURFACE LOCATION.

BRIDGES STATE
WELL # 41
VACUUM GRAYBURG (SAN ANDRES) FIELD
LEA COUNTY, NEW MEXICO
CURRENT COMPLETION

KB = 4031'
GL = 4020'


P, 23, T 17-S, R 34-E, 660' FSL, 660' FEL

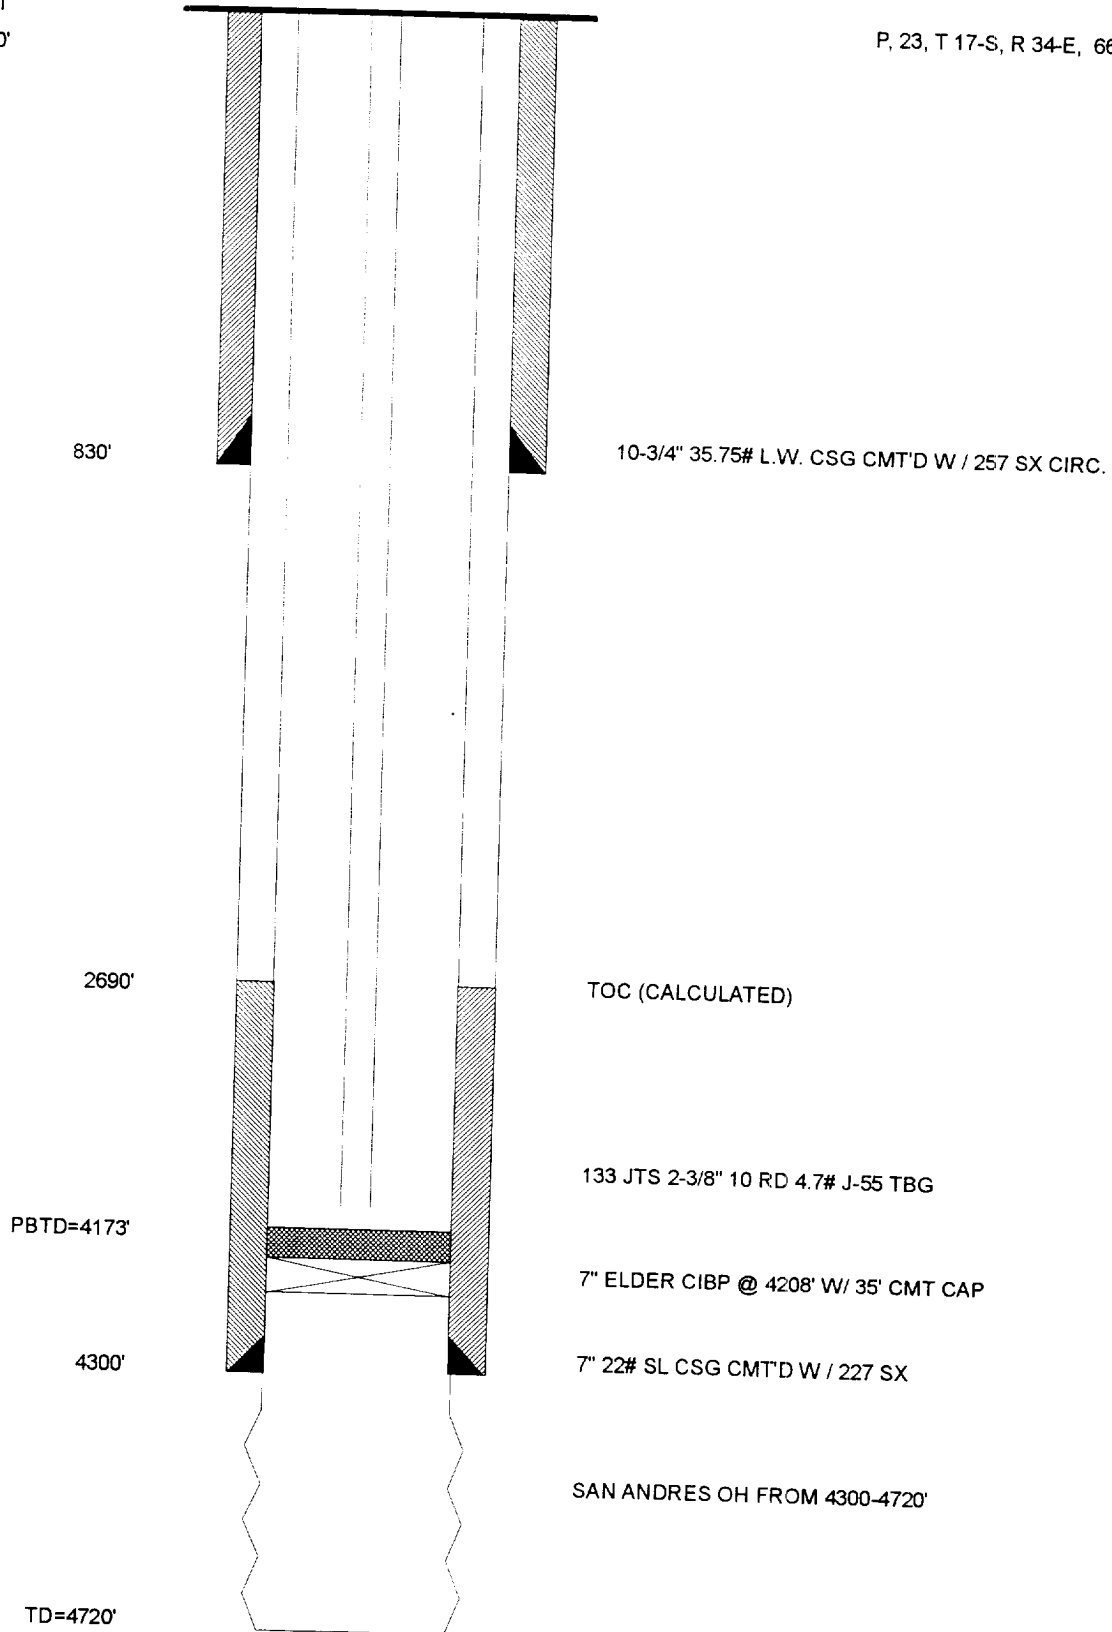

BRIDGES STATE
 WELL # 41
 VACUUM GRAYBURG (SAN ANDRES) FIELD
 LEA COUNTY, NEW MEXICO
 PROPOSED COMPLETION

P. 23, T 17-S, R 34-E, 660' FSL, 660' FEL

KB = 4031'
 GL = 4020'

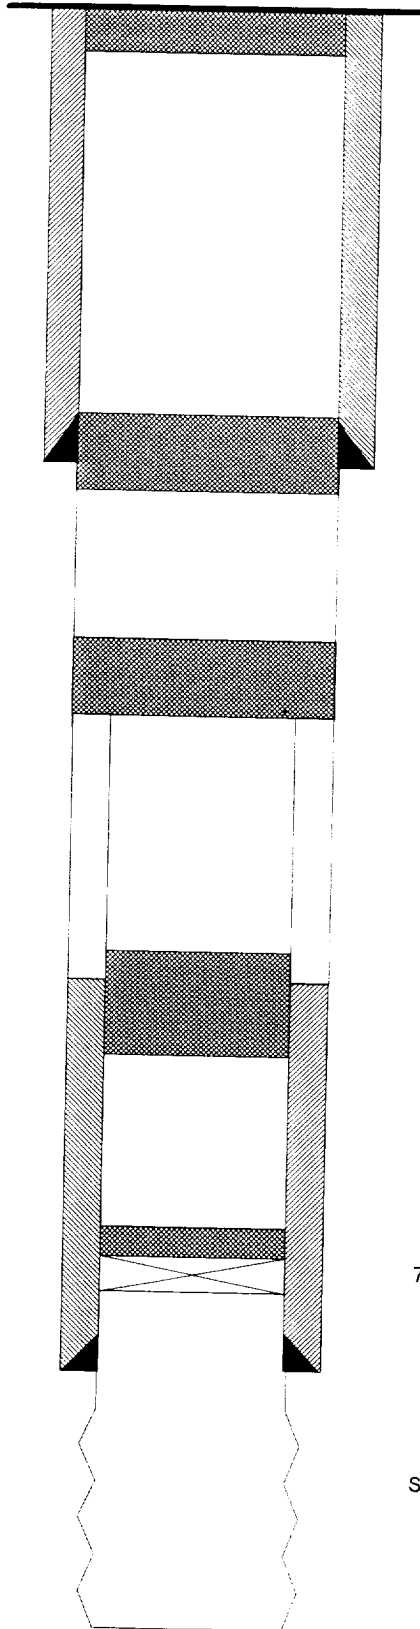

15 SX CLASS C NEAT CMT PLUG
 FROM 30'-SURFACE

10-3/4" 35.75# L.W. CSG @ 830'
 CMT'D W / 257 SX CIRC.

50 SX CLASS C NEAT CMT PLUG ACROSS CSG SHOE
 FROM 880-780'
PLUG MUST BE TAGGED!

50 SX CLASS C NEAT CMT PLUG ACROSS SALT TOP @
 1697' AND 7" CSG STUB FROM 1747-1647'
PLUG MUST BE TAGGED!

TOC @ 2690' (CALCULATED)

30 SX CLASS C NEAT CMT PLUG ACROSS SALT BASE @
 2700' AND TOC @ 2690' FROM 2750-2640'

PBTD=4173'

7" ELDER CIBP @ 4208' W / 35' CMT CAP

7" 22# SL CSG @ 4300'
 CMT'D W / 227 SX

SAN ANDRES OH FROM 4300-4720'

TD=4720'