

Submit 3 Copies  
to Appropriate  
District Office

State of New Mexico  
Energy, Minerals and Natural Resources Department

Form C-103  
Revised 1-1-89

DISTRICT I  
P.O. Box 1980, Hobbs, NM 88240

OIL CONSERVATION DIVISION  
P.O. Box 2088  
Santa Fe, New Mexico 87504-2088

DISTRICT II  
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III  
1000 Rio Brazos Rd., Aztec, NM 87410

WELL API NO. 30-025-05551

5. Indicate Type of Lease  
STATE  FEE

6. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEFEAT OR PLUG BACK TO A  
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT"  
(FORM C-101) FOR SUCH PROPOSALS.)

7. Lease Name or Unit Agreement Name

East Eumont Unit 008598

1. Type of Well:  
OIL WELL  GAS WELL  OTHER Water Injection

8. Well No. 12

2. Name of Operator OXY USA Inc. 16696

9. Pool name or Wildcat Eumont Yates 7 Rvr Qn 022800

3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250

4. Well Location  
Unit Letter C : 273 Feet From The North Line and 2400 Feet From The West Line

Section 4 Township 19S Range 37E NMPM Lea Country  
10. Elevation (Show whether DF, RKB, RT, GR, etc.) 3708

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data  
NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK  PLUG AND ABANDON   
TEMPORARILY ABANDON  CHANGE PLANS   
PULL OR ALTER CASING   
OTHER:   
SUBSEQUENT REPORT OF: REMEDIAL WORK  ALTERING CASING   
COMMENCE DRILLING OPNS.  PLUG AND ABANDONMENT   
CASING TEST AND CEMENT JOB   
OTHER:

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

See other side

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Stewart TITLE Regulatory Analyst DATE 12/16/97  
TYPE OR PRINT NAME David Stewart TELEPHONE NO. 9156855717

(This space for State Use)

APPROVED BY DORIS WILLIAMS TITLE SUPERVISOR DATE 12/16/97

CONDITIONS OF APPROVAL, IF ANY:

Handwritten initials and date


**ATTACHMENT C-103  
OXY USA INC.  
EAST EUMONT UNIT #12  
SEC 4 T19S R37E  
LEA COUNTY, NM**

TD - 4080' PBTB - 4011' PERFS - 3765-3950'

CASING: 8-5/8" 32# @ 1611', 12-1/4", cmt w/ 750sx (surf-calc)  
5-1/2" 14# @ 4070', 7-7/8", cmt w/ 500sx (CBL-1930')

1. MIRU PU, NDWH, NUBOP. RIH & SET CIBP @ 3580, SPOT 10sx CL C CMT ON TOP, POOH. M&P 9.5# MUD LADEN FLUID, POOH TO 3040'.
2. M&P 20sx CL C CMT PLUG FROM TO 3140-3040', M&P 9.5# MUD LADEN FLUID, POOH TO 2769'.
3. M&P 20sx CL C CMT PLUG FROM TO 2869-2769', M&P 9.5# MUD LADEN FLUID, POOH TO 2450'.
4. M&P 20sx CL C CMT PLUG FROM TO 2550-2450', M&P 9.5# MUD LADEN FLUID, POOH TO 1560'.
5. M&P 20sx CL C CMT PLUG FROM TO 1660-1560', M&P 9.5# MUD LADEN FLUID, POOH TO 200'.
6. M&P 20sx CL C CMT FROM 300-200', POOH. M&P 9.5# MUD LADEN FLUID, POOH.
7. M&P 10sx CL C CMT SURFACE PLUG. NDBOP, CUT-OFF CSG 3' BELOW GROUND LEVEL, RDPU, INSTALL DRY-HOLE MARKER, CLEAN LOC & BACKFILL W/O PIT.

OXY USA INC. CURRENT  
EAST EUMONT UNIT #12  
SEC 4 T19S R37E LEA NM

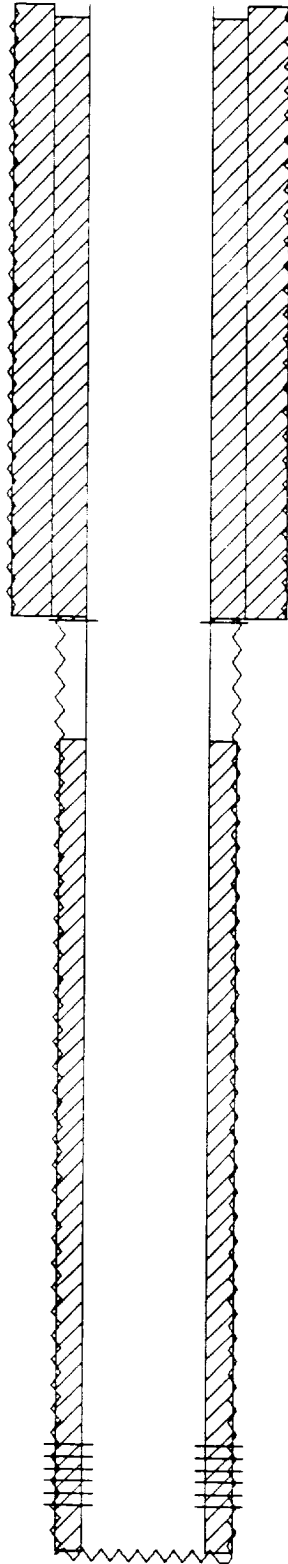

0.0 - 1611.0' 12 1/4" OD HOLE  
0.0 - 1611.0' CEMENT 750sx-CALC  
0.0 - 1611.0' 8 5/8" OD SURF CSG

36.0 - 1620.0' CEMENT 300sx-CBL  
1620.0 - 1620.0' SQUEEZE PERFS

1611.0 - 4080.0' 7 7/8" OD HOLE  
1930.0 - 4070.0' CEMENT 550sx-CBL  
0.0 - 4070.0' 5 1/2" OD PROD CSG

3765.0 - 3950.0' PERFS

TD: 4080'

OXY USA INC. PROPOSED  
 EAST EUMONT UNIT #12  
 SEC 4 T19S R37E LEA NM

0.0 - 80.0' CEMENT PLUG 10sx

200.0 - 300.0' CEMENT PLUG 20sx

1560.0 - 1660.0' CEMENT PLUG 20sx


2450.0 - 2550.0' CEMENT PLUG 20sx

2760.0 - 2869.0' CEMENT PLUG 20sx

3040.0 - 3140.0' CEMENT PLUG 20sx

3500.0 - 3580.0' CEMENT PLUG 10sx

3580.0 - 3580.0' CIBP

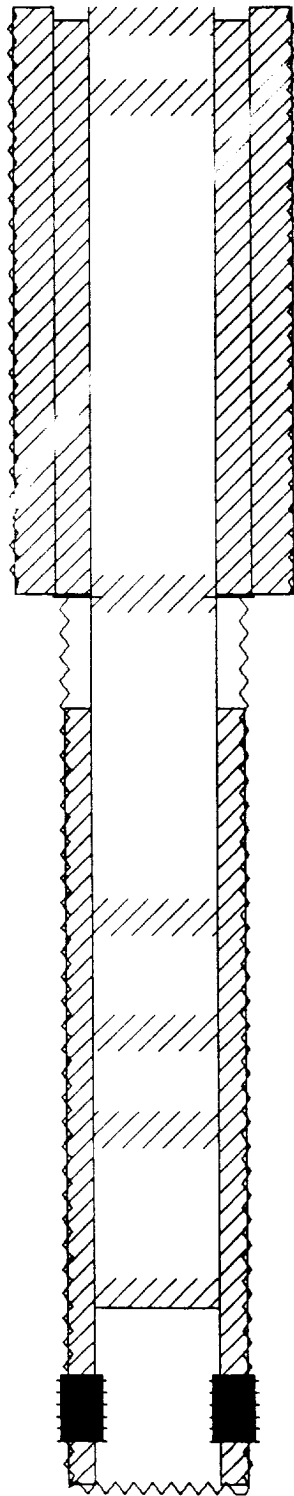

0.0 - 1611.0' 12 1/4" OD HOLE

0.0 - 1611.0' CEMENT 750sx-CALC

0.0 - 1611.0' 8 5/8" OD SURF CSG

36.0 - 1620.0' CEMENT 300sx-CBL

1620.0 - 1620.0' SQUEEZE PERFS

1611.0 - 4080.0' 7 7/8" OD HOLE

1930.0 - 4070.0' CEMENT 550sx-CBL

0.0 - 4070.0' 5 1/2" OD PROD CSG

3765.0 - 3950.0' ABANDONED PERFS

TD: 4080'