


DUPLICATE

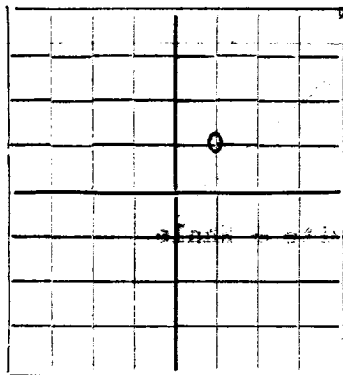

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). **SUBMIT IN TRIPLICATE.**

Oil Well Drilling Co., Hobbs, New Mexico
Company or Operator Address

State **N.M.** Well No. **A-1** in **37E** of **N.M.** of Sec. **29**, T. **19S**
Lease

R. **37E**, N. M. P. M., **Normant** Field, **Lea** County.

Well is **1980** feet south of the North line and **1980** feet west of the East line of **Sec. 29, 19S, 37E**

If State land the oil and gas lease is No. _____ Assignment No. _____

If patented land the owner is _____, Address _____

If Government land the permittee is _____, Address _____

The Lessee is **Oil Well Drilling Co.**, Address **Dallas, Texas.**

Drilling commenced **March 13** 19 **36**. Drilling was completed **April 24** 19 **36**.

Name of drilling contractor **Oil Well Drilling Co.**, Address **Dallas, Texas.**

Elevation above sea level at top of casing **3612** feet.

The information given is to be kept confidential until _____ 19 _____

OIL SANDS OR ZONES

No. 1, from **3932** to **3952** No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **65'** to _____ feet.
No. 2, from _____ to _____ feet.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
12 1/2"	40 lb.	8	South Chester	125'	None			
9-5/8"	36 lb.	10	Youngstown	1130'	Larkin Float			
7"	24 lb.	10	"	3800'	" Guide Shoe & Float Collar			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
16"	12 1/2"	125'	300	Halliburton		
12 1/2"	9-5/8"	1130'	400	Halliburton		
8-3/4"	7"	3800'	225	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Chemical Process	2000 Gals.	April 20		
		" "	2000 "	April 22		

Results of shooting or chemical treatment **No test prior to first treatment**
900 Bbls. 1/2 million gas, after 1st 2000 gals.
1086 Bbls. 1/2 million gas, after 2nd 2000 gals.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from **0** feet to **3952** feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing **April 24**, 19 **36**.
The production of the first 24 hours was **1086** barrels of fluid of which **100** % was oil; _____ % emulsion; **No** % water; and _____ % sediment. Gravity, Be _____
If gas well, cu. ft. per 24 hours **500,000** Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

J. E. Frasier, Driller **K. P. Cunningham**, Driller
Cliff Haynes, Driller _____, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **28th** day of **April**, 19 **36** Name _____ Place **Hobbs, New Mexico** Date **4-28-36**

FORMATION RECORD

FORM 0-102

FROM	TO	THICKNESS IN FEET	FORMATION
0	16	16	Caliche
16	65	49	Sands Gravel
65	134	69	Red Bed
134	1010	876	Red Bed & Shells
1010	1050	40	Red Rocks & Shells
1050	1082	32	Red Rock & Streaks of Anhydrite & Shale
1082	1130	48	Red Rock & Anhydrite Shells
1130	1258	128	Red Rock, Sand & Anhydrite
1258	1270	12	Red Rock
1270	1392	122	Red Anhydrite
1392	1448	56	Broken Salts & Anhydrite
1448	1576	128	Salt
1576	1946	370	Salt, Broken Anhydrite
1946	2092	146	Broken Salt & Anhydrite
2092	2420	328	Salt & Anhydrite
2420	2435	15	Anhydrite
2435	2518	83	Salt & Broken Anhydrite
2518	2703	185	Hard Anhydrite
2703	2722	19	Anhydrite & Lime
2722	2755	33	Anhydrite & Lime Shells
2755	2764	9	Anhydrite
2764	2814	50	Anhydrite & Lime
2814	2855	41	Broken Anhydrite & Lime w/ Gyp Streaks
2855	2993	138	Lime & Anhydrite
2993	3003	10	Lime
3003	3048	45	Broken Lime
3048	3127	79	Broken Lime
3127	3587	460	Hard Gyp Lime
3587	3606	19	Sandy Lime
3606	3785	179	Lime
3785	3800	15	Sandy Lime
3800	3952	152	Lime

IMPORTANT WATER SANDS

CASING RECORD

MUDLOGS AND CEMENTING RECORD

PLUGS AND ADAPTERS

RECORD OF SHOOTING OR CHEMICAL TREATMENT

RECORD OF DRILL-STEM AND SPECIAL TESTS

TOOLS USED

PRODUCTION

EMPLOYEES

FORMATION RECORD OF OTHER SITES

Handwritten notes and signatures at the bottom of the page.