


Form 9-331a
(March 1942)

(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Las Cruces
Lease No. 031695 (b)
Unit NEW

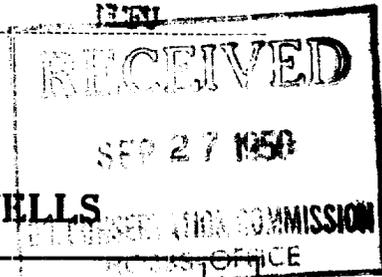

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	<input type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	<input type="checkbox"/>
NOTICE OF INTENTION TO CHANGE PLANS.....	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	<input type="checkbox"/>
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	<input type="checkbox"/>	SUBSEQUENT REPORT OF ALTERING CASING.....	<input type="checkbox"/>
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	<input type="checkbox"/>	SUBSEQUENT REPORT OF REDRILLING OR REPAIR.....	<input type="checkbox"/>
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	<input type="checkbox"/>	SUBSEQUENT REPORT OF ABANDONMENT.....	<input type="checkbox"/>
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	<input type="checkbox"/>	SUPPLEMENTARY WELL HISTORY.....	<input type="checkbox"/>
NOTICE OF INTENTION TO ABANDON WELL.....	<input type="checkbox"/>		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Corran Unit D-29 No. 2

Hobbs, New Mexico September 25, 19 50

Well No. 2 is located 1900 ft. from N line and 650 ft. from E line of sec. 29
NE/4 Sec. 29 20 South 36 East 127N
(4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Corran-Lakes Lee New Mexico
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is 3545 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

It is proposed to change plans of plugging operations outlined on Form 9-331a dated 9-18-50 to read as follows:

The hole will be filled with 12" mud and a cement plug will be set from 6650 to 6750 to cover top of the Brinkard. A cement plug will be set from 2025 to 2925 to cover bottom of 9 5/8" casing set at 2074. The 9 5/8" casing will be shot and pulled from approximately 470' and a cement plug set from 510' to 410' to cover shot point. A cement plug will be set from 310' to 210' to cover bottom of 13 3/8" casing set at 261' and cemented to surface. A cement plug will be set from 65' to surface. A 4" pipe marker will be erected and location restored to original condition.

The above in accordance with telephone conversation between Mr. H. H. Soyster and Mr. E. L. Shafer as of 9-25-50.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Continental Oil Company

Address Box 00

Hobbs, New Mexico

By [Signature]

Title District Superintendent

100-100000
100-100000

100-100000 100-100000 100-100000 100-100000 100-100000
100-100000 100-100000 100-100000 100-100000 100-100000
100-100000 100-100000 100-100000 100-100000 100-100000

100-100000 100-100000 100-100000 100-100000 100-100000

100-100000 100-100000 100-100000 100-100000 100-100000
100-100000 100-100000 100-100000 100-100000 100-100000
100-100000 100-100000 100-100000 100-100000 100-100000
100-100000 100-100000 100-100000 100-100000 100-100000

100-100000 100-100000 100-100000 100-100000 100-100000

100-100000 100-100000 100-100000 100-100000 100-100000

100-100000 100-100000 100-100000 100-100000 100-100000

100-100000 100-100000 100-100000 100-100000 100-100000

100-100000 100-100000 100-100000 100-100000 100-100000