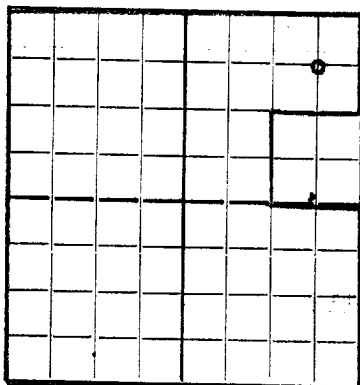


N.

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

DUPLICATE

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Gulf Oil Corporation
Company or OperatorArnott Ramsay C
Lease

Well No. 9 in NE NE of Sec. 21, T. 21S

R. 56E, N. M. P. M., Eunice Field, Lea County.

Well is 660 feet south of the North line and 660 feet west of the East line of NE NE

If State land the oil and gas lease is No. B-229 Assignment No.

If patented land the owner is, Address

If Government land the permittee is, Address

The Lessee is Gulf Oil Corporation, Address Tulsa, Okla.

Drilling commenced July 19th, 19 36 Drilling was completed August 15th, 19 36

Name of drilling contractor Loffland Bros., Address Tulsa, Okla.

Elevation above sea level at top of casing 3617' feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 3810' to 3916' No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from No record - Rotary hole, to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
10-3/4	32	8	Lapwld.	299'	?			
7-5/8	22	8	Lapwld.	1496'	?			
5-1/2	17	10	Lapwld.	3787'	?			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
13-3/4	10-3/4	299'	250	Halliburton		
9-7/8	7-5/8	1496'	300	Halliburton		
6-3/4	5-1/2	3787'	300	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3916' feet, and from feet to feet

Cable toops were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing August 8th, 19 36

The production of the first 24 hours was 434 barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Driller Driller

Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 28th.

Tulsa, Oklahoma August 28, 1936

day of August, 19 36

Name

Position General Superintendent

Representing Gulf Oil Corporation

Company or Operator.

Address Tulsa, Okla.

Notary Public

My Commission expires March 16, 1940

FORMATION RECORD

FORMATION		THICKNESS IN FEET	FROM	TO
FORMATION	Surface	36	0	36
	sand & calcch	266		266
	red bed	402		402
	red bed - shells	820		820
	red bed - red rock	1005		1005
	red rock	1368		1368
	red rock & anhydrite shells	1439		1439
	anhydrite & red rock	1600		1600
	anhydrite	1515		1515
	salt & anhydrite shells	1579		1579
	salt	1705		1705
	anhydrite	1758		1758
	salt	1781		1781
	anhydrite	1786		1786
	salt	1802		1802
	anhydrite	1912		1912
	salt & shells	2070		2070
	salt & anhydrite shells	2168		2168
	salt & shells	2176		2176
	anhydrite	2276		2276
	salt, anhydrite & shells	2364		2364
	salt	2418		2418
	anhydrite & salt broken	2569		2569
	salt & shells	2575		2575
	anhydrite	2589		2589
	salt & shells	2718		2718
	salt & anhydrite shells	2945		2945
	anhydrite	3009		3009
	lime	3023		3023
	anhydrite	3060		3060
	sandy lime	3078		3078
	anhydrite	3800		3800
	lime	3916		3916
	TOTAL DEPTH	3916		3916