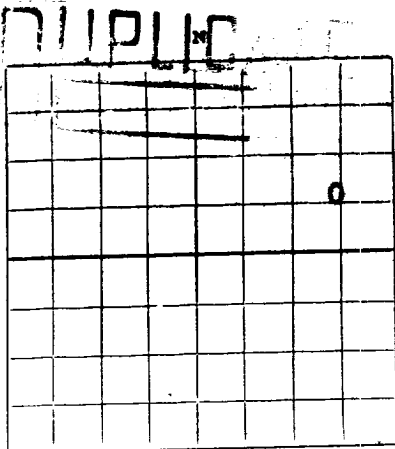


Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

AREA 640 ACRES
LOCATE WELL CORRECTLY

Stanolind Oil and Gas Company
(Company or Operator)

Southland Royalty "A"
(Lease)

Well No. 6, in SE 1/4 of NE 1/4, of Sec 9, T -21-S, R -37-E, NMPM.

Drinkard Pool, Lea County.

Well is 1980 feet from North line and 660 feet from East line

of Section 9. If State Land the Oil and Gas Lease No. is

Drilling Commenced May 23rd, 1953. Drilling was Completed July 2nd, 1953

Name of Drilling Contractor Lee Drilling Company

Address Philtower Building - Tulsa, Oklahoma

Elevation above sea level at Top of Tubing Head 3737.35'. The information given is to be kept confidential until Not Confidential, 19

OIL SANDS OR ZONES

No. 1, from 5548 to 6125 (Gas) No. 4, from to
No. 2, from 6165 to 6310 (Gas) No. 5, from to
No. 3, from 6595 to 6635 (Oil) No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13-3/8"		New	275	Guide			Surface
9"		Used	2843	Guide			Intermediate
5-1/2"		New	6880	Float		6595' - 6635'	Oil

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17-1/2"	13-3/8"	252	275	Howco Plug		
12-1/4"	9"	2856	(a)	Howco Plug		
7-7/8"	5-1/2"	6892	(b)	Howco Plug		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

(a) 1380 sax plus 1380 cu.ft. perlite (b) 180 sx. plug 180 cu.ft. Perlite.

Washed formation with 500 gallons 15% regular acid and acidized with 1500 gallons 15% regular acid.

Result of Production Stimulation See Production - Reverse Side

Depth Cleaned Out

RECORD OF DRILL-STEM AND SPECIAL 1 18

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to TD 7200' feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing August 13th, 1953

OIL WELL: The production during the first 24 hours was 17 barrels of liquid of which 99.9% was oil; % was emulsion; % water; and .1% was sediment. A.P.I. Gravity 39 degrees API

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy.	T. Devonian	T. Ojo Alamo
T. Salt	T. Silurian	T. Kirtland-Fruitland
B. Salt	T. Montoya	T. Farmington
T. Yates	T. Simpson	T. Pictured Cliffs
T. 7 Rivers	T. McKee	T. Menefee
T. Queen	T. Ellenburger	T. Point Lookout
T. Grayburg	T. Gr. Wash	T. Mancos
T. San Andres 4022	T. Granite	T. Dakota
T. Glorieta 5163		T. Morrison
T. Drinkard 6448		T. Penn.
T. Tubbs 6165		
T. Abo 6715		
T. Penn.		
T. Miss.		

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	72	72	Caliche and Red Bed				
72	1280	1208	Red Bed				
1280	1320	40	Red Bed and Shale				
1320	1395	75	Anhydrite				
1395	1650	255	Anhydrite and Shale				
1650	1926	276	Anhydrite and Salt				
1926	2295	369	Salt and Shells				
2295	2360	65	Salt and Anhydrite				
2360	2539	179	Salt and Anhydrite & Gyp				
2539	2630	91	Anhydrite				
2630	2702	72	Anhydrite and Gyp				
2702	2810	108	Anhydrite and Shale				
2810	2840	30	Anhydrite				
2840	7200	4360	Lime				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

December 10, 1953

Company or Operator Stanolind Oil and Gas Company Address P. O. Box 68 - Hobbs, New Mexico
Name Ralph Hendrickson Position or Title Field Superintendent