

(SUBMIT IN TRIPLICATE)


UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Budget Bureau 42-R358.2
Approval expires 12-31-52

Land Office

Lease No.

Unit

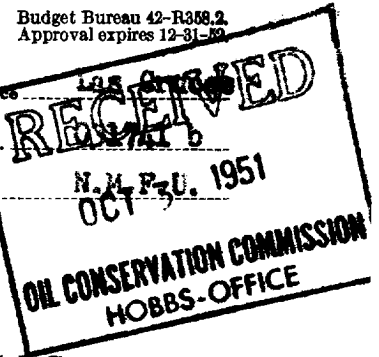

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL		SUBSEQUENT REPORT OF WATER SHUT-OFF	<input checked="" type="checkbox"/>
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL		SUBSEQUENT REPORT OF REDRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

W. C. Hawk B-3 No. 4-E

Hobbs, New Mexico October 1, 19 51

Well No. 4-E is located 1650 ft. from ~~SW~~ line and 1650 ft. from ~~SE~~ line of sec. 3

SE/4 Sec. 3
(1/4 Sec. and Sec. No.)

21-S
(Twp.)

37-E
(Range)

N.M.P.M.
(Meridian)

North Brunson
(Field)

Lea
(County or Subdivision)

New Mexico
(State or Territory)

The elevation of the derrick floor above sea level is _____ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Set 10 3/4" casing at 266' with 25C sacks cement. Plug down 4:00 A.M. 9-24-51. Cement circulated.

On 9-25-51, after 24 hrs. WOC, tested casing with 500# for 30 mins. before drilling plug, test okay. Drilled out cement and tested casing with 500# for 30 mins., final pressure 495#.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Continental Oil Company

Address Box 66, Hobbs, N.M.

By *E. L. Schuler*

Title District Superintendent

RECEIVED
 DEPT. OF AGRICULTURE
 WASHINGTON, D. C.
 JAN 10 1900
 100-100000

2

100-100000

100-100000
 100-100000
 100-100000
 100-100000
 100-100000

100-100000
 100-100000
 100-100000
 100-100000
 100-100000

100-100000

100-100000

100-100000

(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Las Cruces

Lease No. 031761 (b)

Unit RECEIVED

SEP 24 1951

CONSERVATION COMMISSION
HOBBBS OFFICE

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL		SUBSEQUENT REPORT OF REDRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

W. C. Hawk B-3 No. 4-E Hobbs, New Mexico August 16, 19 51

Well No. 4-E is located 1650 ft. from SW line and 1650 ft. from E line of sec. 3

SW 1/4 Sec. 3
(1/4 Sec. and Sec. No.)

21-S
(Twp.)

37-E
(Range)

N.M.P.M.
(Meridian)

North Brown
(Field)

Lee
(County or Subdivision)

New Mexico
(State or Territory)

The elevation of the derrick floor above sea level is _____ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

It is our intention to drill a well at the above location to a total depth of approximately 8150' with rotary tools. All casing points will be cemented in accordance with approved methods of the U.S. Geological Survey and any other requirements will be complied with.

It is planned to use the following casing pattern: 10 3/4" casing to be set at approximately 250' and cemented with 250 sacks, cement to be circulated; 7 5/8" casing to be set at approximately 3050' and cemented with 1100 sacks, or sufficient cement to protect the salt section as determined by survey; 5 1/2" casing to be set at total depth and cemented with approximately 770 sacks cement as determined by survey, and to be perforated opposite the pay zone.

Permission to produce this well upon completion is also requested.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Continental Oil Company

Address Box CC

Hobbs, New Mexico

By E. L. Shaffer

Title District Superintendent

SEP 24 1951

CONFIDENTIAL

Section 101, New Mexico
 Section 102, New Mexico
 Section 103, New Mexico
 Section 104, New Mexico
 Section 105, New Mexico
 Section 106, New Mexico
 Section 107, New Mexico
 Section 108, New Mexico
 Section 109, New Mexico
 Section 110, New Mexico

It is our intention to drill a well at the above location to a total depth of approximately 8100 feet. All casing points will be cemented in accordance with approved methods of the U.S. Geological Survey and other appropriate agencies will be completed with.

It is planned to use the following casing program: 10 3/4" casing to be set at approximately 1500 feet and cemented with 200 sacks, cement to be circulated 7 1/2" casing to be set at approximately 3000 feet and cemented with 1100 sacks, or equivalent casing to protect the well section as determined by survey; 2 1/2" casing to be set at total depth and cemented with approximately 700 sacks cement as determined by survey, and to be perforated opposite the pay zone.

Production to produce this well upon completion is also requested.

WILL BE RELEASED
 CONFIDENTIAL LOGS
 INDICATE WHEN
 ABOVE DATE DOES NOT
 8/28/81
 ELP

Confidential Oil Company

Section 101, New Mexico
 Section 102, New Mexico