


TRIPPLICATE

FORM C-105

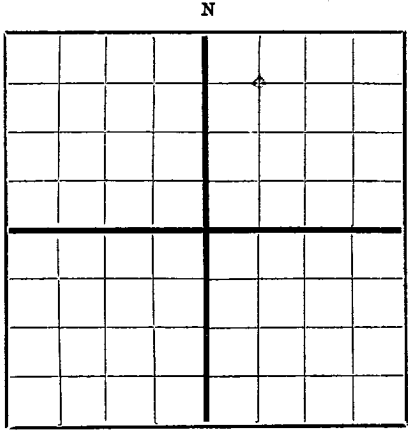

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Radford-Zachry Oil Co., Inc. Box 1262, Hobbs, New Mexico
Company or Operator Address
L. E. Grizzell Well No. 1 in NW 1/4-NE 1/4 of Sec. 8, T. 22S
Lease
R. 37E, N. M. P. M., Drinkard Field, Lea County.
Well is 660 feet south of the North line and 1990 feet west of the East line of 8-22-37
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Cities Service Oil Co., Address Bartlesville, Okla.
If Government land the permittee is Address
The Lessee is Radford-Zachry Oil Co., Inc., Address Box 1262, Hobbs, N.M.
Drilling commenced April 3d 1950 Drilling was completed April 28, 1950
Name of drilling contractor Clay & Cackle, Address Hobbs, New Mexico
Elevation above sea level at top of casing 3434 feet.
The information given is to be kept confidential until Not confidential 19.

OIL SANDS OR ZONES

No. 1, from 6425 to 6560 No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.
No. 1, from None to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	OUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
3 1/2"	9.3	11 1/2	SEE PREVIOUS C-105 -	6576	Baker	-	6426	6576	Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
4 1/2"	3 1/2"	6576	200	SEE PREVIOUS C-105 Halliburton	8.8	6 Tons

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Acid	2000	4-28-50	6426-6560'	

Results of shooting or chemical treatment. Swabbed small amount of oil and gas before acid. Flowed 288 bbls. oil with 360 MCF of gas per day after acid.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 5220 feet to 6576 feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing April 28, 1950
The production of the first 24 hours was 288 barrels of fluid of which 100% was oil; % emulsion; % water; and % sediment. Gravity, Be. 39.6
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

George McDaniel, Driller Roy Whitley, Driller
Albert Pierce, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 1st day of May, 1950
Martha Colley Brack Notary Public
My Commission expires December 17, 1952

Lea County, New Mexico, May 1, 1950
Name Guy Zachry
Position Vice-President
Representing Radford-Zachry Oil Co., Inc. Company or Operator
Address Box 1262, Hobbs, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
Surface	5220'	5220	SEE PREVIOUS FORM 0-105
5220	6576	1356	LIME AND DOLOMITE