


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

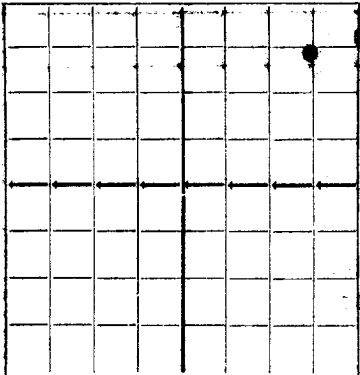

WELL RECORD

AUG 30 1937

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Gulf Oil Corporation

Tulsa, Oklahoma

Company or Operator

Address

R.E. Cole

Well No. 2

in NE NE

of Sec. 16

T. 22S

Lease

R. 37E

N. M. P. M.

Parrosa

Field,

Lee

County.

Well is 660

feet south of the North line and 660

feet west of the East line of

NE NE

If State land the oil and gas lease is No. 2-5490

Assignment No.

If patented land the owner is

Address

If Government land the permittee is

Address

The Lessee is

Gulf Oil Corporation

Address

Tulsa, Oklahoma

Drilling commenced 6-11-

19 37

Drilling was completed 6-15-

19 37

Name of drilling contractor

Rowan Drilling Co.

Address

Rowan Drlg. Fort Worth, Texas

Elevation above sea level at top of casing

3405'

feet.

The information given is to be kept confidential until

?

19

OIL SANDS OR ZONES

No. 1, from

to

No. 4, from

to

No. 2, from

to

No. 5, from

to

No. 3, from

to

No. 6, from

to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from

to

feet.

No. 2, from

to

feet.

No. 3, from

to

feet.

No. 4, from

to

feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	TO	PURPOSE
15-5/8"	40	8	Seamless.	26'					
8-5/8	52	8	**	1129					
** Bottom 30 fts. 80 LN, top 8 fts. Seamless.									

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17-1/4	15-5/8	26'	15	By hand		
11	8-5/8	1129	507	Halliburton	Used 1200# of Aquagel	

PLUGS AND ADAPTERS

Heaving plug—Material

Length

Depth Set

Adapters—Material

Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

~~Well drilled to depth of 1140' and temporarily abandoned.~~ Well drilled to depth of 1140' and temporarily abandoned.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0' feet to 1140' feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing 19

The production of the first 24 hours was barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Driller Driller

Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 26

Tulsa, Oklahoma

August 25, 1937

day of August, 1937

Name

Position General Superintendent

Notary Public

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
	25'		Caliche
	42		Sand & caliche
	220		Sand & gravel
	457		Red bed & broken sand streaks
	780		Red bed with streaks of lime
	1000		Red bed & red rock
	1104		Red rock & hard sand
Total depth	1140		Anhydrite