

MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

NOTICE OF INTENTION TO DRILL

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico.

1/1/37

Place

Date

OIL CONSERVATION COMMISSION,
Santa Fe, New Mexico

Gentlemen:

You are hereby notified that it is our intention to commence the drilling of a well to be known as _____

Tide Water Associated Oil Company, Anna Walden Well No. 2 in NE

of Sec. 21, T. 22-S, R. 37E, N. M. P. M., South Kunie Lease Field, Lea County.

N.

The well is 1980' feet [X] [S.] of the North line and 1980' feet

[X] [W.] of the East line of Section 21-22S-37E

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. _____ Assignment No. _____

If patented land the owner is Anna Walden

Address Anhurst, Texas.


If government land the permittee is _____

Address _____

The lessee is Tide Water Associated Oil Company

Address Box 731, Tulsa, Okla.

We propose to drill well with drilling equipment as follows: Cable Tools.

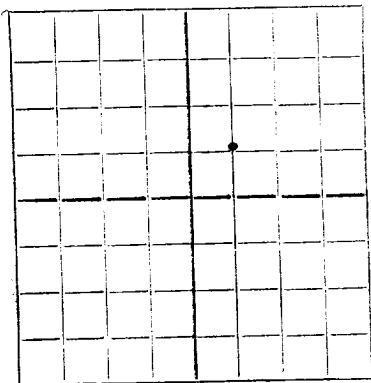

AREA 640 ACRES
LOCATE WELL CORRECTLY

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows: Tide Water carries blanket bond of \$10,000 with United States Fidelity & Guaranty Company as Security.
We propose to use the following strings of casing and to land or cement them as indicated:

Size of Hole	Size of Casing	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
18"	15 1/2	70	SH	110	Landed	
15"	13" OD	50	SH	240	Cemented	150
12"	10-3/4" OD	40	SH	700	Landed	
10"	8-5/8" OD	32	New	1150	Cemented	100
8"	6-5/8" OD	24	New	3400	Cemented	150

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 3500 feet.

Additional information: 15 1/2" casing will be set through first surface water. 13" OD casing will be set at about 250', and cemented to surface after pulling 15 1/2" casing. 10-3/4" OD casing will be set at about 700'. 8-5/8" OD casing will be set at about 1150' and cemented back to bottom of 10-3/4" OD casing, then 10-3/4" OD will be pulled. 6-5/8" OD casing will be cemented at about 3400' and cemented with 150% of the calculated amount of cement to fill back to base of salt.

Approved _____ 19 JAN 7 1937
except as follows:

Sincerely yours,

Subject to special regulations for drilling and casing wells in this area

Tide Water Associated Oil Company

By F. Schneider - P. P.
Company or Operator

Position Prod. Sup't.

Send communication regarding well to

Name F. Schneider

Address Drawer KK Hobbs, New Mexico.

OIL CONSERVATION COMMISSION,

By _____

Title _____

... ..

... ..

... ..

... ..

... ..

... ..

... ..

... ..

... ..

... ..

... ..

... ..

... ..

... ..

... ..

... ..

... ..

... ..

... ..

... ..

... ..

... ..