



Subject	LMPsu 26-1	Page No.	Of
File		By	Date 8/13/97

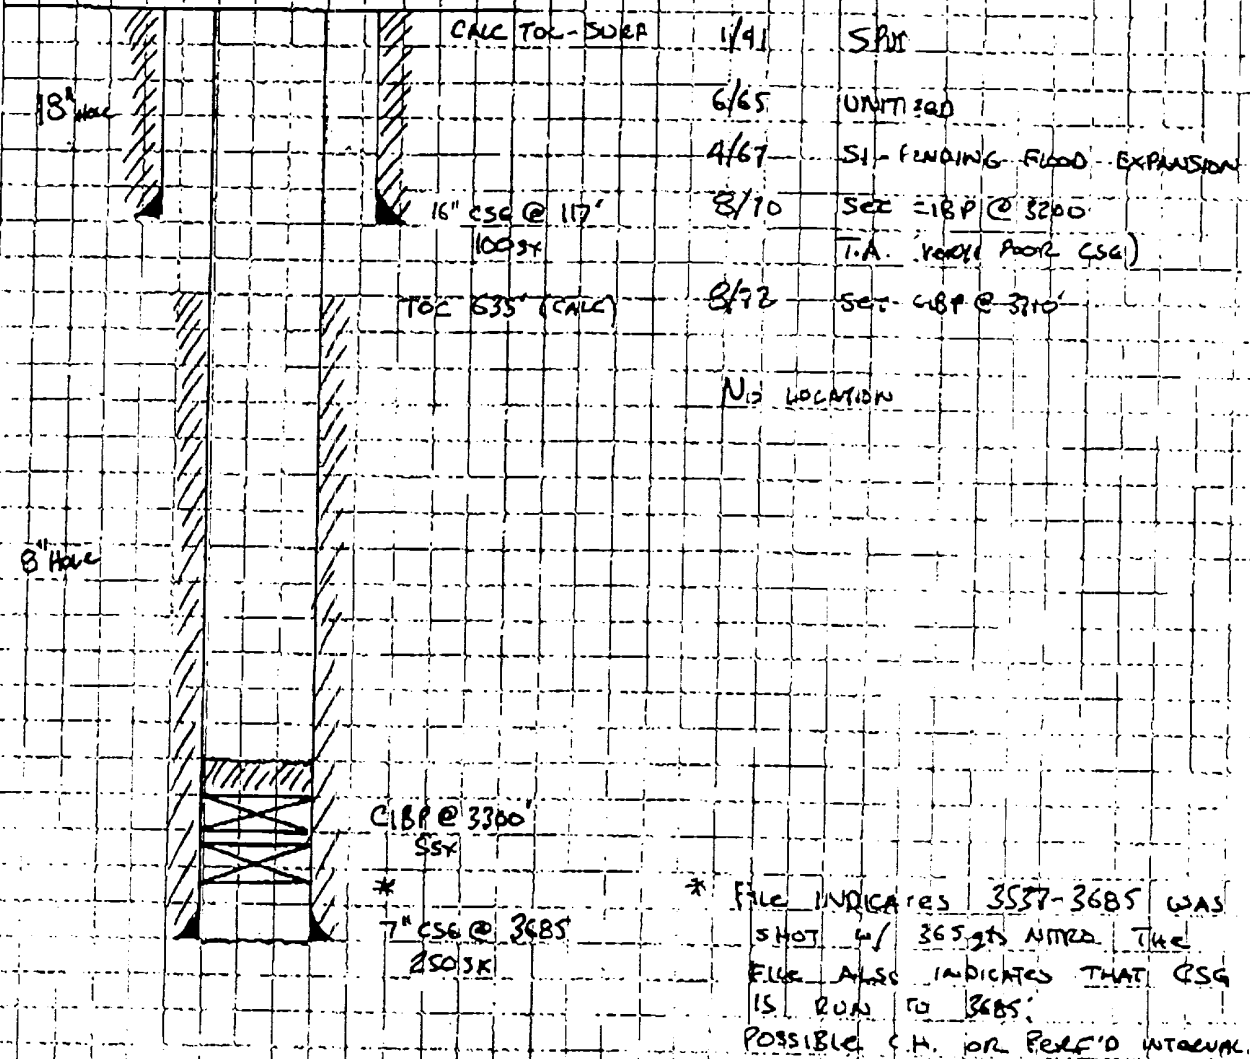

2310 FNL & 2310 FBL
 Sect 28 T22S R37E
 Lea Co, NM

N

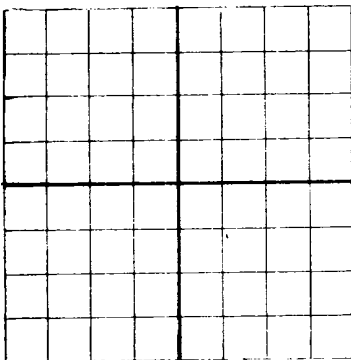


AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

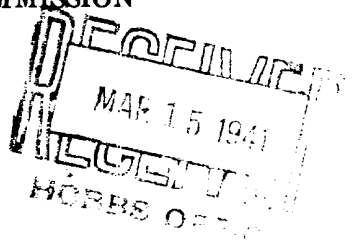

Stampfli & Martin Box 384 Eunice, New Mexico
Company or Operator Address
Christmas Well No. 1 in NW NW NE of Sec. 28 T. 22
Lease
R. 37 N. M. P. M. So. Eunice Field, Lea County.
Well is 2310 feet south of the North line and 2310 feet west of the East line of Sec 28
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Annie L. Christmas Address Eunice, New Mexico
If Government land the permittee is Address
The Lessee is Address
Drilling commenced January 25 1941 Drilling was completed March 13 1941
Name of drilling contractor Stampfli & Martin Address Eunice, New Mexico
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from 3537 to 3550 No. 4, from to
No. 2, from 3550 to 3565 No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 95 to 100 feet.
No. 2, from 170 to 190 feet.
No. 3, from 710 to 730 feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
16"	70 #	8	S.H.	117	Texas				
7"	20 #	8	New	3685	Texas				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
18"	15 1/2	117	100	Haliburton		
8"	7	3685	250	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
4"		337	365	3/18/41	3537 3685	To 3537

Results of shooting or chemical treatment 50 bbls. Natural swab test.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from 0 feet to 3685 feet, and from feet to feet

PRODUCTION

Put to producing March 11 1941
The production of the first 24 hours was 50 barrels of fluid of which 100 % was oil; %
emulsion; % water; and % sediment. Gravity, Be 37°
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

W. P. Stampfli Driller V. N. Martin Driller
G. G. Sawtelle Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 14
day of March 1941

Hobbs, New Mexico March 14, 1941
Place Date
Name W. P. Stampfli

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	10	10	Caliche
10	90	80	Sand
90	100	10	Sand & water
100	117	17	Red Rock
117	170	53	Red Rock
170	190	20	Sand & water 5 bbls per hr.
190	535	345	Red Rock
535	590	55	White shale
590	610	20	Red Rock
610	795	185	Red Rock
795	810	15	Gray Shale
810	830	20	Water sand
830	1130	300	Red Rock
1130	1250	120	Anhydrite
1250	1295	45	Red Rock
1295	1575	280	Salt
1575	1630	55	Salt & Potash
1630	2195	565	Salt
2195	2925	730	Anhydrite
2925	3100	175	Brown Lime
3100	3305	205	Lime & Anhydrite
3305	3391	86	Gray lime
3391	3537	146	Lime
3537	3550	13	Sand (Show Oil)
3550	3565	15	Lime
3565	3583	18	Lime & sand (Show Oil & Gas)
3578	3600	22	Lime
3600	3615	15	Hard Sand
3615	3637	22	Lime
3637	3640	3	Blue shale
3640	3665	25	Lime, saturated
3665	3685	20	White, hard lime
			3785 - TOTAL DEPTH