


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

Notice of Intention to Drill

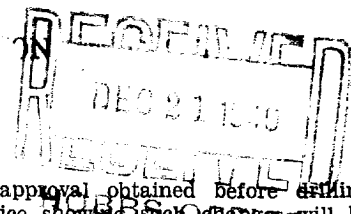

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico - Dec. 19, 1940

OIL CONSERVATION COMMISSION, Santa Fe, New Mexico. Gentlemen:

Place

Date

You are hereby notified that it is our intention to commence the drilling of a well to be known as SKELLY OIL COMPANY H. O. Sims Well No. 15 in SE/4 SE/4

of Sec. 33, T. 22S, R. 37E, N. M. P. M., Leased Skelly Lea County

The well is 660 feet (N.) (S.) of the South line and 330 feet (E.) (W.) of the East line of Section 33 -

Grid for well location: 6x6 grid with 'N.' and 'E.' labels.

AREA 640 ACRES LOCATE WELL CORRECTLY

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. Assignment No. Hugh O. Sims

If patented land the owner is Eunice, New Mexico

Address

If government land the permittee is

Address Skelly Oil Co.

The lessee is Tulsa, Oklahoma

Address

Cable tools top to total depth. Contractor - J. C. Clower, Eunice, N.M.

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows:

We propose to use the following strings of casing and to land or cement them as indicated:

Table with 7 columns: Size of Hole, Size of Casing OD, Weight Per Foot, New or Second Hand, Depth, Landed or Cemented, Sacks Cement.

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 3480 feet.

Additional information: In cementing the 16" OD casing the cement will be circulated back to bottom of cellar. The 15", 10-3/4" and 8-5/8" OD casing will be pulled at the time the 7" casing is run and cemented. In cementing the casing Halliburton Process will be used..

Approved \_\_\_\_\_, 19\_\_\_\_ except as follows:

Sincerely yours,

SKELLY OIL COMPANY

Company or Operator

By \_\_\_\_\_ District Superintendent

Position

Send communication regarding well to

Name Skelly Oil Company

Address Hobbs, New Mexico

OIL CONSERVATION COMMISSION,

By \_\_\_\_\_

Title OIL & GAS INSPECTOR

DEC 21 1940

THE UNIVERSITY OF CHICAGO  
DEPARTMENT OF CHEMISTRY  
RESEARCH REPORT

1954

BY  
J. H. GOLDSTEIN AND  
R. F. SCHWENKER

RECEIVED BY THE DEPARTMENT OF CHEMISTRY  
ON

APRIL 15, 1954

THIS REPORT IS THE PROPERTY OF THE UNIVERSITY OF CHICAGO  
AND IS LOANED TO YOU BY THE LIBRARY OF THE DEPARTMENT OF CHEMISTRY  
IT IS TO BE RETURNED TO THE LIBRARY OF THE DEPARTMENT OF CHEMISTRY  
ON OR BEFORE

APRIL 30, 1954

IF YOU ARE NOT A MEMBER OF THE UNIVERSITY OF CHICAGO  
PLEASE RETURN THIS REPORT TO THE LIBRARY OF THE DEPARTMENT OF CHEMISTRY  
AT THE UNIVERSITY OF CHICAGO

505 EAST SOUTH EAST AVENUE  
CHICAGO, ILLINOIS

LIBRARY OF THE DEPARTMENT OF CHEMISTRY  
UNIVERSITY OF CHICAGO

APR 15 1954

UNIVERSITY OF CHICAGO  
DEPARTMENT OF CHEMISTRY  
LIBRARY