


NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

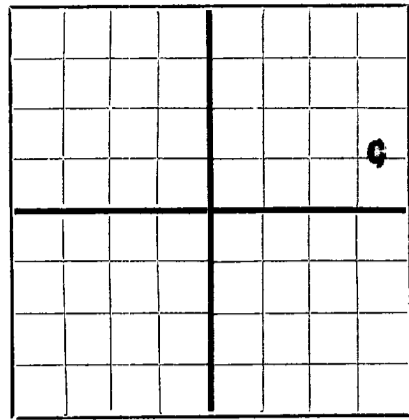

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Ralph Lowe Midland, Texas
Company or Operator Address
E. F. King Well No. **2** in **SE NE** of Sec. **5**, T. **23-S**
Lease
R. **37-E**, N. M. P. M., **Penrose-Skelly** Field, **Lea** County.
Well is **2112** feet south of the North line and **660** feet west of the East line of **Section 5**.
If State land the oil and gas lease is No. _____ Assignment No. _____
If patented land the owner is **E. F. King**, Address **Sanita, New Mexico**
If Government land the permittee is _____, Address _____
The Lessee is _____, Address _____
Drilling commenced **Feb. 1** 19 **49** Drilling was completed **March 30** 19 **49**
Name of drilling contractor **Self**, Address _____
Elevation above sea level at top of casing **3340** feet.
The information given is to be kept confidential until **No** 19 _____

OIL SANDS OR ZONES

No. 1, from **3575** to **3585** No. 4, from _____ to _____
No. 2, from **3716** to **3720** No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.
No. 1, from **170** to **200** feet **10 bwph**
No. 2, from **730** to **735** feet _____
No. 3, from **745** to **750** feet _____
No. 4, from _____ to _____ feet _____

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10 3/4	32.75	8 rd thd	J-55	325					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/2"	10 3/4"	325	150	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters — Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from **0** feet to **300** feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing _____, 19 _____
The production of the first 24 hours was **None** barrels of fluid of which _____% was oil; _____% emulsion; _____% water; and _____% sediment. Gravity, Be _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

E. J. Sanders, Driller **G. I. Barnes**, Driller
E. H. Sandwisch, Driller _____, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **1st** day of **April**, 19 **49** at **Midland, Texas** April **1**, 19**49**
Name **W. E. Mitchell** Date
Position **Agent**
Representing **RALPH LOWE**
Company or Operator
Address **Midland, Texas**
My Commission expires **6-1-49**

Lillie Mae Stovall Notary Public

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	70	70	Caliche
70	105	35	Sand
105	325	220	Sand & red rock
325	730	405	Red rock
730	805	75	Sand & shale
805	1150	345	Red beds
1150	1330	180	Anhydrite
1330	1515	185	Salt & anhydrite
1515	1850	335	Salt & shells
1850	2150	300	Salt & potash
2150	2550	400	Salt & shells
2550	3040	490	Anhydrite
3040	3050	10	Sand
3050	3590	540	Lime
3590	3645	55	Sand
3645	3670	25	Lime
3670	3690	20	Sand
3690	3800	110	Lime T.D.