



Occidental Permian LTD.

A subsidiary of Occidental Petroleum Corporation

5 Greenway Plaza, Suite 110, Houston, Texas 77046-0521
P.O. Box 27570, Houston, Texas 77227-7570
Phone 713.215.7000

October 19, 2021

State of New Mexico
Energy, Minerals & Natural Resources Department
Oil Conservation Division
1220 S. St. Frances Dr.
Santa Fe, NM 87505

RE: Pressure Maintenance Project
North Hobbs G/SA Unit
Well No. 965
API: New Drill
Letter F, Section 33, T-18S, R-38E
Lea County, NM

To Mr. Richard Ezeanyim, Chief Engineer:

Occidental Permian Ltd. respectfully request administrative approval, without hearing, to commence injection (water, CO₂, and produced gas) per the authorized Order No. R-6199-F. In support of this request please find the following documentation:

- Administrative Application Checklist
- Form C-108 with miscellaneous data attached
- An Injection Well Data Sheet with Wellbore Schematic
- Form C-102
- Map

*** Per Order No. R-6199-F, this application is eligible for administrative approval without notice or hearing ***

If you have any questions regarding this application, please contact me at 832-646-4450 or email Jose_Gago@oxy.com.

Sincerely,

Jose Gago
Regulatory Engineer

DATE IN	SUSPENSE	ENGINEER	LOGGED IN	TYPE	APP NO.
---------	----------	----------	-----------	------	---------

ABOVE THIS LINE FOR DIVISION USE ONLY

NEW MEXICO OIL CONSERVATION DIVISION

- Engineering Bureau -

1220 South St. Francis Drive, Santa Fe, NM 87505

**ADMINISTRATIVE APPLICATION CHECKLIST**

THIS CHECKLIST IS MANDATORY FOR ALL ADMINISTRATIVE APPLICATIONS FOR EXCEPTIONS TO DIVISION RULES AND REGULATIONS WHICH REQUIRE PROCESSING AT THE DIVISION LEVEL IN SANTA FE

Application Acronyms:

[NSL-Non-Standard Location] [NSP-Non-Standard Proration Unit] [SD-Simultaneous Dedication]
 [DHC-Downhole Commingling] [CTB-Lease Commingling] [PLC-Pool/Lease Commingling]
 [PC-Pool Commingling] [OLS - Off-Lease Storage] [OLM-Off-Lease Measurement]
 [WFX-Waterflood Expansion] [PMX-Pressure Maintenance Expansion]
 [SWD-Salt Water Disposal] [IPI-Injection Pressure Increase]
 [EOR-Qualified Enhanced Oil Recovery Certification] [PPR-Positive Production Response]

[1] TYPE OF APPLICATION - Check Those Which Apply for [A]"

[A] Location - Spacing Unit - Simultaneous Dedication"
☐ NSL ☐ NSP ☐ SD"

Check One Only for [B] or [C]"

[B] Commingling - Storage - Measurement"
☐ DHC ☐ CTB ☐ PLC ☐ PC ☐ OLS ☐ OLM"

[C] Injection - Disposal - Pressure Increase - Enhanced Oil Recovery"
☐ WFX ☒ PMX ☐ SWD ☐ IPI ☐ EOR ☐ PPR"

[D] Other: Specify Additional Injector within approved project area (R-6199-F)A

[2] NOTIFICATION REQUIRED TO: - Check Those Which Apply, or Does Not Apply

[A] ☐ Working, Royalty or Overriding Royalty Interest Owners

[B] ☐ Offset Operators, Leaseholders or Surface Owner

[C] ☐ Application is One Which Requires Published Legal Notice

[D] ☐ Notification and/or Concurrent Approval by BLM or SLO
 U.S. Bureau of Land Management - Commissioner of Public Lands, State Land Office

[E] ☐ For all of the above, Proof of Notification or Publication is Attached, and/or,

[F] ☐ Waivers are Attached

[3] SUBMIT ACCURATE AND COMPLETE INFORMATION REQUIRED TO PROCESS THE TYPE OF APPLICATION INDICATED ABOVE.

[4] CERTIFICATION: I hereby certify that the information submitted with this application for administrative approval is **accurate** and **complete** to the best of my knowledge. I also understand that **no action** will be taken on this application until the required information and notifications are submitted to the Division.

Note: Statement must be completed by an individual with managerial and/or supervisory capacity.

Jose L Gago

Print or Type Name

Signature

Engineer, Regulatory

Title

10/19/2021

Date

jose_gago@oxy.com


e-mail Address

STATE OF NEW MEXICO
ENERGY, MINERALS AND NATURAL
RESOURCES DEPARTMENT

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

FORM C-108
Revised June 10, 2003

APPLICATION FOR AUTHORIZATION TO INJECT

- I. PURPOSE: _____ Secondary Recovery X Pressure Maintenance _____ Disposal _____ Storage
Application qualifies for administrative approval? X Yes _____ No
- II. OPERATOR: OCCIDENTAL PERMIAN LTD
ADDRESS: P.O. Box 4294 Houston, TX 77210-4294
CONTACT PARTY: Jose L Gago PHONE: 832-646-4450
- III. WELL DATA: Complete the data required on the reverse side of this form for each well proposed for injection.
Additional sheets may be attached if necessary.
- IV. Is this an expansion of an existing project? X Yes _____ No
If yes, give the Division order number authorizing the project: R-6199-F
- V. Attach a map that identifies all wells and leases within two miles of any proposed injection well with a one-half mile radius circle drawn around each proposed injection well. This circle identifies the well's area of review.
- VI. Attach a tabulation of data on all wells of public record within the area of review which penetrate the proposed injection zone. Such data shall include a description of each well's type, construction, date drilled, location, depth, record of completion, and a schematic of any plugged well illustrating all plugging detail.
- VII. Attach data on the proposed operation, including:
1. Proposed average and maximum daily rate and volume of fluids to be injected;
 2. Whether the system is open or closed;
 3. Proposed average and maximum injection pressure;
 4. Sources and an appropriate analysis of injection fluid and compatibility with the receiving formation if other than reinjected produced water; and,
 5. If injection is for disposal purposes into a zone not productive of oil or gas at or within one mile of the proposed well, attach a chemical analysis of the disposal zone formation water (may be measured or inferred from existing literature, studies, nearby wells, etc.).
- *VIII. Attach appropriate geologic data on the injection zone including appropriate lithologic detail, geologic name, thickness, and depth. Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlying the proposed injection zone as well as any such sources known to be immediately underlying the injection interval.
- IX. Describe the proposed stimulation program, if any.
- *X. Attach appropriate logging and test data on the well. (If well logs have been filed with the Division, they need not be resubmitted).
- *XI. Attach a chemical analysis of fresh water from two or more fresh water wells (if available and producing) within one mile of any injection or disposal well showing location of wells and dates samples were taken.
- XII. Applicants for disposal wells must make an affirmative statement that they have examined available geologic and engineering data and find no evidence of open faults or any other hydrologic connection between the disposal zone and any underground sources of drinking water.
- XIII. Applicants must complete the "Proof of Notice" section on the reverse side of this form.
- XIV. Certification: I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.
- NAME: Jose L Gago TITLE: Engineer, Regulatory
SIGNATURE:  DATE: 10/19/2021
E-MAIL ADDRESS: Jose_Gago@oxy.com
- * If the information required under Sections VI, VIII, X, and XI above has been previously submitted, it need not be resubmitted. Please show the date and circumstances of the earlier submittal: February 11, 2014 as part of Order No. R-6199-F application

DISTRIBUTION: Original and one copy to Santa Fe with one copy to the appropriate District Office

Side 2

III. WELL DATA

A. The following well data must be submitted for each injection well covered by this application. The data must be both in tabular and schematic form and shall include:

- (1) Lease name; Well No.; Location by Section, Township and Range; and footage location within the section.
- (2) Each casing string used with its size, setting depth, sacks of cement used, hole size, top of cement, and how such top was determined.
- (3) A description of the tubing to be used including its size, lining material, and setting depth.
- (4) The name, model, and setting depth of the packer used or a description of any other seal system or assembly used.

Division District Offices have supplies of Well Data Sheets which may be used or which may be used as models for this purpose. Applicants for several identical wells may submit a "typical data sheet" rather than submitting the data for each well.

B. The following must be submitted for each injection well covered by this application. All items must be addressed for the initial well. Responses for additional wells need be shown only when different. Information shown on schematics need not be repeated.

- (1) The name of the injection formation and, if applicable, the field or pool name.
- (2) The injection interval and whether it is perforated or open-hole.
- (3) State if the well was drilled for injection or, if not, the original purpose of the well.
- (4) Give the depths of any other perforated intervals and detail on the sacks of cement or bridge plugs used to seal off such perforations.
- (5) Give the depth to and the name of the next higher and next lower oil or gas zone in the area of the well, if any.

XIV. PROOF OF NOTICE

All applicants must furnish proof that a copy of the application has been furnished, by certified or registered mail, to the owner of the surface of the land on which the well is to be located and to each leasehold operator within one-half mile of the well location.

Where an application is subject to administrative approval, a proof of publication must be submitted. Such proof shall consist of a copy of the legal advertisement which was published in the county in which the well is located. The contents of such advertisement must include:

- (1) The name, address, phone number, and contact party for the applicant;
- (2) The intended purpose of the injection well; with the exact location of single wells or the Section, Township, and Range location of multiple wells;
- (3) The formation name and depth with expected maximum injection rates and pressures; and,
- (4) A notation that interested parties must file objections or requests for hearing with the Oil Conservation Division, 1220 South St. Francis Dr., Santa Fe, New Mexico 87505, within 15 days.

NO ACTION WILL BE TAKEN ON THE APPLICATION UNTIL PROPER PROOF OF NOTICE HAS BEEN SUBMITTED.

NOTICE: Surface owners or offset operators must file any objections or requests for hearing of administrative applications within 15 days from the date this application was mailed to them.

C-108 Application Attachment
Occidental Permian Ltd.
North Hobbs G/SA Unit No. 965
Lea County, New Mexico

- I. This is a pressure maintenance project. The project qualifies for administrative approval.
- II. OCCIDENTAL PERMIAN Ltd.
P.O. Box 4294 Houston, TX 77210-4294
Contact Party: Jose Gago, 832-646-4450
- III. Injection well data sheet and wellbore schematic has been attached for NORTH HOBBS G/SA UNIT No. 965
- IV. This is an expansion of an existing project authorized under Order No. R-6199-F.
- V. The map with a two mile radius surrounding the injection well and a one half mile radius for area of review is attached.
- VI. In accordance to Order No. R-6199-F Section 4 OCCIDENTAL PERMIAN Ltd certifies that:
The area of review for well "NORTH HOBBS G/SA UNIT #965" shows no substantive changes in the information furnished in support of Order No. R-6199-F concerning the status of construction of any well that penetrates the injection interval within the one-half (1/2) mile around the injection well, with the exemption of the wells below:

API	Well Name	Operator	Status after Jan 2014
30-025-07546	NORTH HOBBS G/SA UNIT 331	OCCIDENTAL PERMIAN LTD	P & A
30-025-07548	NORTH HOBBS G/SA UNIT 321	OCCIDENTAL PERMIAN LTD	P & A
30-025-07556	NORTH HOBBS G/SA UNIT 411	OCCIDENTAL PERMIAN LTD	P & A
30-025-23759	CONOCO STATE 001	OXY USA INC	P & A
30-025-28951	NORTH HOBBS G/SA UNIT 323	OCCIDENTAL PERMIAN LTD	P & A
30-025-34416	NORTH HOBBS G/SA UNIT 545	OCCIDENTAL PERMIAN LTD	P & A
30-025-41578	NORTH HOBBS G/SA UNIT 948	OCCIDENTAL PERMIAN LTD	New Well
30-025-41643	NORTH HOBBS G/SA UNIT 949	OCCIDENTAL PERMIAN LTD	New Well
30-025-43282	NORTH HOBBS G/SA UNIT 693	OCCIDENTAL PERMIAN LTD	New Well
30-025-44718	NORTH HOBBS G/SA UNIT 694	OCCIDENTAL PERMIAN LTD	New Well
30-025-44719	NORTH HOBBS G/SA UNIT 695	OCCIDENTAL PERMIAN LTD	New Well
30-025-44720	NORTH HOBBS G/SA UNIT 697	OCCIDENTAL PERMIAN LTD	New Well
30-025-44721	NORTH HOBBS G/SA UNIT 696	OCCIDENTAL PERMIAN LTD	New Well

The wellbore diagrams and tabulated well data is attached.

- VII. The area of review is attached.
 1. Average Injection Rate 4,000 BWPD / 15,000 MCFGPD
Maximum Injection Rate 9,000 BWPD / 20,000 MCFGPD
 2. This will be a closed system.
 3. Average Surface Injection Pressure 1,100 PSIG
Maximum Surface Injection Pressure
Produced Water 1,100 PSIG
CO2 1,250 PSIG

CO2 w/produced gas 1,770 PSIG

(In accordance with Order No. R-6199-F, effective 7/18/13)

4. Source Water – San Andres Produced Water

(Analysis previously provided at hearing, Case No. 14981)

- VIII. The information was previously submitted as part of Order No. R-6199-F application
- IX.
 - a. Well will be perforated using slick gun system, 4- jspf, 90-degree phasing
 - b. Acid stimulated using ~ 6000 gals of 15% HCL NEFE, pumped using a straddle packer assembly (PPI – Tool)
 - c. Acid will be flush with approximately 100 bbls of fresh water
 - d. Max injection rate per cluster: 4 to 5 bpm.
- X. Logs will be filed at the time of drilling.
- XI. The information was previously submitted as part of case No. 15103 Order R6199F – Effective May 22, 2014.
- XII. N/A. This is a pressure maintenance project, not a disposal well.
- XIII. Section 3 of Order No. R-6199-F allows the administrative approval, from the Division Director, of additional injection wells without notice and hearing. Notices to producers and surface owners for the water/CO2 flood area were provided at the time of the application and hearing for Order No. R-6199-F.

Side 1

INJECTION WELL DATA SHEET

OPERATOR: Occidental Permian LTD.

WELL NAME & NUMBER: NORTH HOBBS G/SA UNIT 965

WELL LOCATION: 1488'FNL & 2027'FWL	F	33	18S	38E
FOOTAGE LOCATION	UNIT LETTER	SECTION	TOWNSHIP	RANGE

WELLBORE SCHEMATICWELL CONSTRUCTION DATASurface Casing

Hole Size: 13 1/2" Casing Size: 9 5/8"

Cemented with: 515 sx. or ft³

Top of Cement: Surface Method Determined: Circulated

Intermediate Casing

Hole Size: Casing Size:

Cemented with: sx. or ft³

Top of Cement: Method Determined:

Production Casing

Hole Size: 8 3/4" Casing Size: 7"

Cemented with: 925 sx. or ft³

Top of Cement: Surface Method Determined: Circulated

Total Depth: 5025'

Injection Interval

perforated from 3950' TVD feet to Base of the unit @ 4500' TVD

(Perforated or Open Hole; indicate which)

Side 2

INJECTION WELL DATA SHEETTubing Size: 2 - 7/8" Lining Material: DuolineType of Packer: 5-1/2" x 2 3/8" 14-20# AS1-X Double Grip injection PackerPacker Setting Depth: approx. 3900' TVD or 4330' MD

Other Type of Tubing/Casing Seal (if applicable): _____

Additional Data

1. Is this a new well drilled for injection? X Yes No

If no, for what purpose was the well originally drilled? _____

2. Name of the Injection Formation: San Andres

3. Name of Field or Pool (if applicable): Hobbs; Grayburg - San Andres

4. Has the well ever been perforated in any other zone(s)? List all such perforated intervals and give plugging detail, i.e. sacks of cement or plug(s) used. No

5. Give the name and depths of any oil or gas zones underlying or overlying the proposed injection zone in this area: _____

Queen @ -250' TVDSS or 3400' TVDGlorieta @ -1650' TVDSS or 5300' TVD

WELLBORE DIAGRAM

(updated: 10/07/2021)

Revision 0

WELL# NORTH HOBBS G/SA UNIT #965

API#	TBD
------	-----

Zone: San Andres

GL elev

3645.1'

Spud: TBD

NORTH HOBBS G/SA UNIT #965

CEMENT

DEVIATION SURVEYS

DEPTHDEGREE

Surface Casing

Cement with 515 sx 14.8 PPG Class C

CIRCULATED TO SURFACE

13-1/2" hole

9-5/8" 32# set at +/- 1600'

Production Casing

Cement with 925 sx 14.8 PPG Class C, Two satge cement Job

CIRCULATED TO SURFACE ON BOTH STAGES

8-3/4" Hole

Perfs 4410' MD - 5025' MD

7" 23# set at +/- 5025' MD

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-025-	Pool Code 31920	Pool Name HOBBS; GRAYBURG-SAN ANDRES
Property Code 19520	Property Name NORTH HOBBS G/SA UNIT	Well Number 33-965
OGRID No. 157984	Operator Name OCCIDENTAL PERMIAN LTD.	Elevation 3645.1'


Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
F	33	18 SOUTH	38 EAST, N.M.P.M.		1488'	NORTH	2027'	WEST	LEA

Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
G	33	18 SOUTH	38 EAST, N.M.P.M.		1584'	NORTH	1439'	EAST	LEA
Dedicated Acres	Joint or Infill	Consolidation Code	Order No.						

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

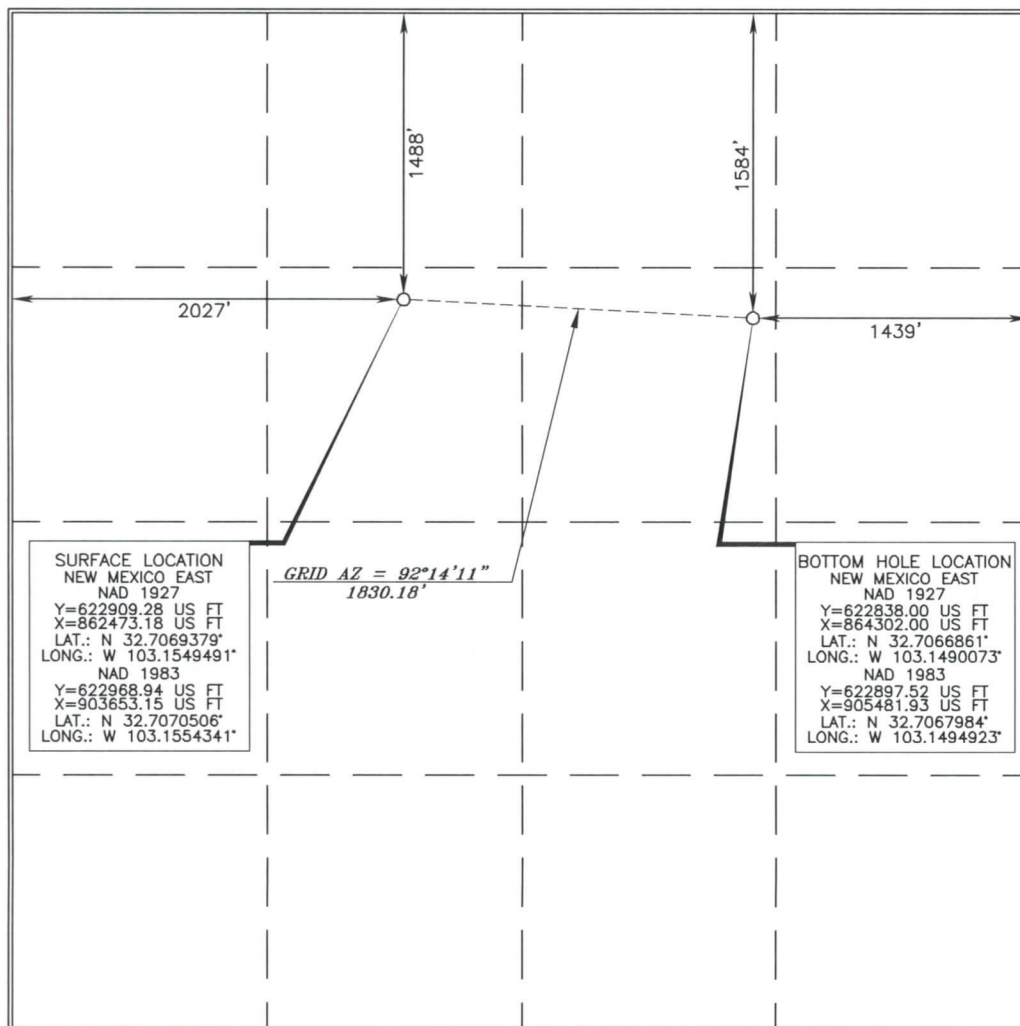

OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Roni Mathew 10/13/2021
Signature Date

Roni Mathew
Printed Name
roni_mathew@oxy.com
E-mail Address

SURVEYOR CERTIFICATION


I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

SEPTEMBER 02, 2021
Date of Survey

Signature and Seal of
Professional Surveyor
Terrell J. Carl 9/17/2021
Certificate Number 15079

WO# 210902WL-d (KA)

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-23759	OXY USA INC	CONOCO STATE	001	Oil	Plugged, Site Released	1980	N	2130	E	G	33	18S	38E	26046	7075	17	13.375	418	410	Surf	Circ	6611'-6975' UPPER BLINEBRY	Well Plugged on 05/29/2019
																12.25	9.625	3799	350	1089	Calc	6585'-6600' TUBB (GAS)	
																8.75	7	7075	900	3658	Calc	5871'-6029' DRINKARD	
																0	4.5	7010	845	Surf	Circ		

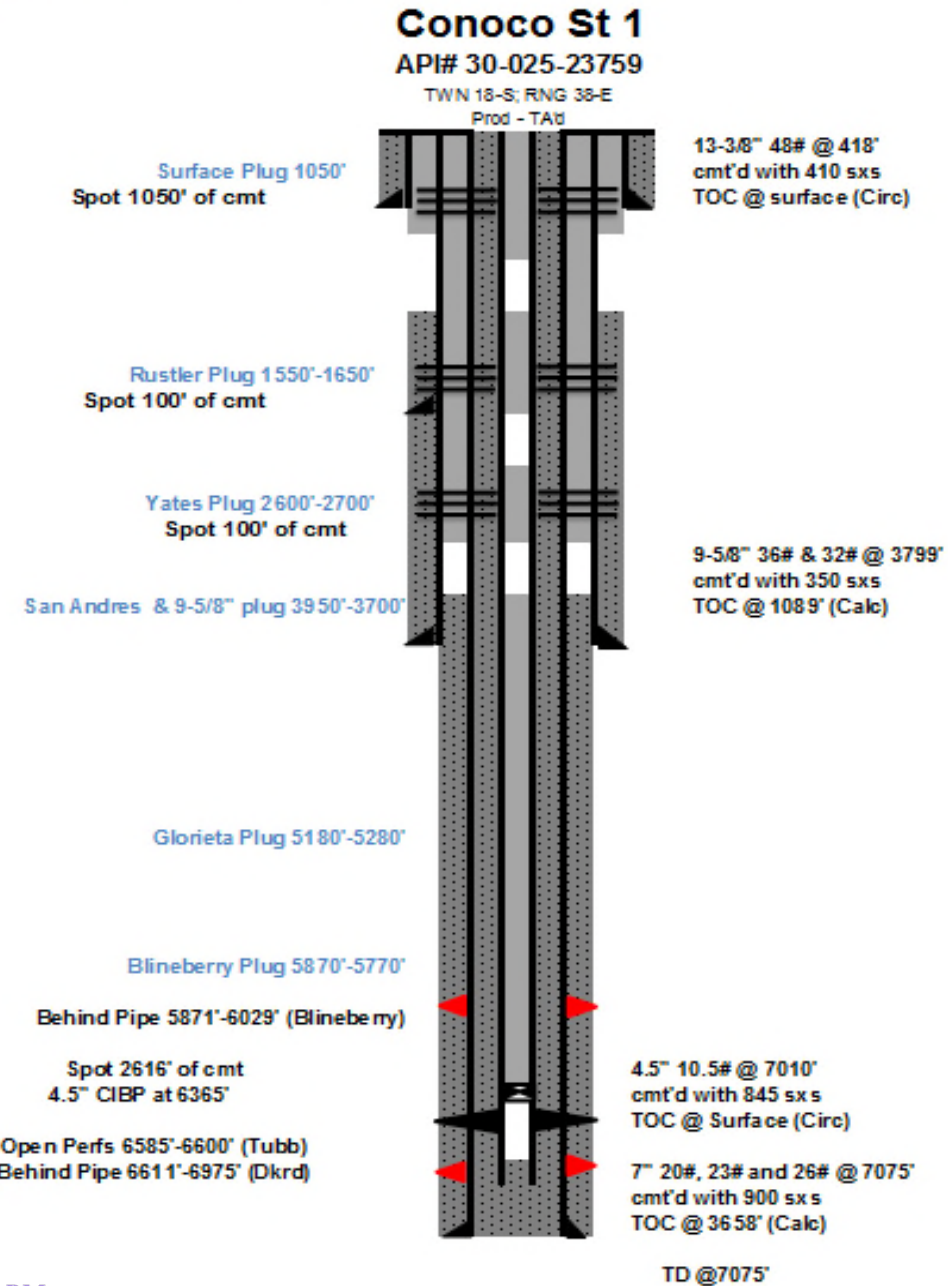

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-07548	OCCIDENTAL PERMIAN LTD	NORTH HOBBS G/SA UNIT	321	Oil	Plugged, Site Released	1980	N	1980	E	G	33	18S	38E	11/18/1932	4244	0 0 0	15.5 9.625 7 5.5	237 2756 3970 4243	235 600 350 300	Surf 0 0 1830	Calc 0 0 CBL	4090'-4234' GRAYBURG-SAN ANDRES	There are no records of bit size or hole size. Cement tops for 9 5/8" and 7" casing could not be calculated. Well Plugged on 04/11/2014

Occidental Permian Ltd.

NHU #321

30-025-07548

Lea Co., NM

Perf @ 60' Spot 245 SX
Cement from Surface' to 470'

15 - 1/2" 70# @ 237
Cement w/ 235 sx

Rustler Plug
Perf @ 1670' Spot 50 SX
Cement from 1470' to 1721'

Yates / Csg Shoe Plug
Perf @ 2806' Spot 40 SX
Cement from 2456' to 2851'

9 5/8" 40# @ 2756
Cement w/ 600 sx
TOC unknown

San Andres Plug
Spot 25 sx Tag @ 3783

CIBP @ 4050'. Cap w/ 20 sx cmt

7" 24# @ 3970
Cement w/ 350 sx
TOC unknown

Perforations: 4090-4234

5 1/2" 4243' Cmt w /300 sx.
 TOC: 1830' CBL

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS	
30-025-28951	OCCIDENTAL PERMIAN LTD	NORTH HOBBS G/SA UNIT	323	Oil	Plugged, Site Released	2525	N	1453	E	G	33	18S	38E	6/5/1985	4370	0 0 0	13.375 9.625 7	40 1517 4370	0 650 925	Surf Surf 3012	Circ Circ CBL		4003'-4221' GRAYBURG-SAN ANDRES	Well Plugged on 04/11/2014

Occidental Permian Ltd.

NNSAU #323


30-025-28951

Surface: 2525' FNL and 1453' FEL

Unit Letter 'G' Section 33 T18S, R38E

Lea County, New Mexico

13 3/8" 70# @ 40' with cmt to surface

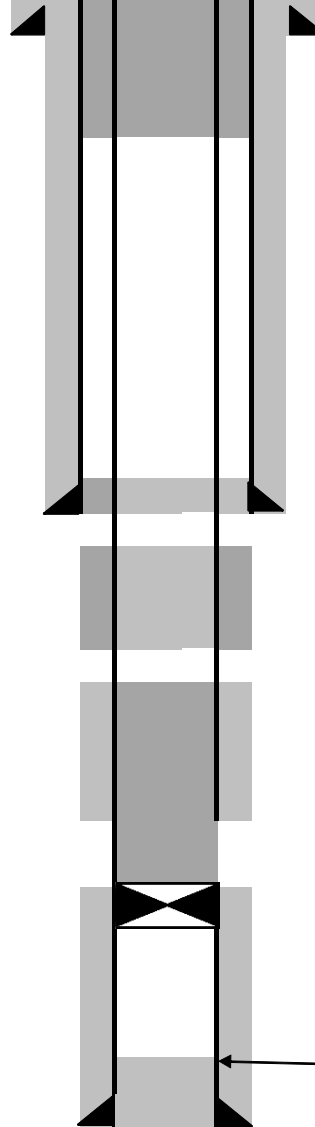

Perf @ 94', Sqx 25 sx cmt to surface.

Perf @ 400', Sqx 100 sx cmt, tag TOC @ 96'.

9 5/8", 36#, K-55 at 1517
Cmt w/ 650 sx
Circulate.

Perf @ 1567', Spot 30 sx cmt @ 1623', tag TOC @ 1449'.

Perf @ 2655', Spot 35 sx cmt, tag TOC @ 2512'.

Tag Plug @ 3947', stop 25 sx cmt, Tag TOC @ 3802'.

CIBP at 3953' Cap w/20 sx cmt

San Andres Open Perforations
4003-4221' (gross)7" 20#, K-55 @ 4370
cmt w/925 sx
TOC 3012' (CBL)
Returns seen at surface

PBTD at 4320 (cmt)

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-07546	OCCIDENTAL PERMIAN LTD	NORTH HOBBS G/SA UNIT	331	Oil	Plugged, Site Released	1920	S	1780	E	J	33	18S	38E	10/1/1931	4234	15.500 9.625 7.000 5 7	15.500 9.625 7.000 5 4.5	425 2757 3928 4232 3871	425 425 325 50 450	Surf Surf Surf 3871 Surf	Circ Calc CBL Circ Circ	4047'-4054' GRAYBURG-SAN ANDRES	Well Plugged on 02/25/2019 and site released on 10/11/2019



Occidental Petroleum Corporation

NHU 33-331**API# 30-025-07546**

TWN 18-S; RNG 38-E

Prod. - TA'd

Perf @ 60'
Sqz 30 sx cmt
Cmt to surface

Perf @ 300'
Sqz 300 sx cmt
Tag TOC @ 140'

Rustler Plug
Perf @ 1600'
Sqz 100 sx cmt
Tag TOC @ 1500'

Yates / Csg Shoe Plug
Perf @ 2800' Spot 25 SX
Cement from 2413' to 2864'

San Andres Plug
Spot 25 sx Tag @ 3202'

CIBP @ 3793'

Plugged Perfs: 4047'-4209'

15-1/2" 70# @ 232'
cmt'd w/ 425 sxs
TOC @ Surf (Circ.)

9-5/8" 40# @ 2757'
cmt'd w/600 sxs
TOC @ 1009' (Calc.)

4.5" 12.6# @ 3871'-Surface'
cmt'd w/450 sxs
TOC @ surface (Circ.)

PBDT @ 3758'

7" 24# @ 3930'
cmt'd w/325 sxs
TOC @ 2500' (CBL)

5" 18# @ 3871-4232'
cmt'd w/ 50 sxs
TOC @ 3871' (TOL)

TD @ 4232'

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-07556	OCCIDENTAL PERMIAN LTD	NORTH HOBBS G/SA UNIT	411	Oil	Plugged, Not Released	660	N	660	E	A	33	18S	38E	9/28/1934	4256	0 0 0 0	13.375 9.625 7 2.5	285 2739 3970 4175	200 350 150 40	Surf 1723 3260 3964	Circ Calc CBL Temp	4020'-4170' GRAYBURG-SAN ANDRES	Well Plugged on 03/28/2018



Occidental Petroleum Corporation

NHU 33-411**API# 30-025-07556**

TWN 18-S; RNG 38-E

P&A'd Well

Perf at 350' and Sqz 210 sx (50 bbl)
Then spot 35 sx (8.2 bbls) down to 300'
Perf at 60' and sqz 36 sx to surface
(Surface Plug)

Perf at 1658 and 1598. Cemented under
a packer with 50 sx (11.7 bbls). Tag @
(Rustle Plug)

Perf and Sqz 100 sx from 2615' uncer
CICR
(Yates / Csg Shoe Plug)

Spot 25 sx on top of plug

TOC at 3915' (tagged)
(85' cement)
CIBP SA 4000'

SQZD Perfs 4020-4058'
Plugged Back: 4095-4170'

13-3/8" 54.5# @ 285'
cmt'd w/ 200 sxs
TOC @ Surf (Circ.)

Tops:
Rustler: 1608'
Salt: 1690'
Yates: 2727'
B. Grayburg: 3915'
San Andres: 4017'

9-5/8" 36# @ 2739'
cmt'd w/350 sxs
TOC @ 1723' (Calc.)

7" 24# @ 3970'
cmt'd w/150 sxs
TOC @ 3260' (CBL)

5-1/2" 14# @ 3919-4175'
cmt'd w/40 sxs
TOC @ 3964 (TS)

PBTD @ 3915'
TD @ 4240'

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS	
30-025-34416	OCCIDENTAL PERMIAN LTD	NORTH HOBBS G/SA UNIT	545	Oil	Plugged, Site	1925	N	2100	E	G	33	185	38E	7/19/1998	4404	8.625 5.500	8.625 5.500	1550 4558	800 1000	Surf Surf	Circ Circ		4275'-4354' GRAYBURG-SAN ANDRES	Well Plugged on 04/11/2014



Occidental Petroleum Corporation

NHU 33-545**API# 30-025-34416**

TWN 18-S; RNG 38-E

Prod- Active

Surface Plug
Spot 300' of cmt @ 300'
Cement to surface

Rustler / Csg Shoe Plug
Spot 100' of cmt @ 1600'
TOC @ 1450

8 5/8" 24# @ 1550'
cmt'd w/550 sxs
TOC @ Surface (Circ.)

Yates Plug
Spot 100' of cmt from 2800'
TOC @ 2680'

San Andres Plug
CIBP @ 4110 and cap w/ 25 sx TOC @
4010'

Perfs 4160' to 4354'


5 1/2" 15.5# @ 4558'
cmt'd w/1000 sxs
TOC @ Surface (Circ.)

TD @ 4558
PBTD @ 4451

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-43282	OCCIDENTAL PERMIAN LTD	NORTH HOBBS G/SA	693	Injection	Active	1880	S	1298	W	L	33	185	38E	6/18/2016	5106	12.625	9.625	1569	630	Surf 0	Calc	4678'-4939'	GRAYBURG-SAN ANDRES




Wellbore Diagram : NHSAU 693-33

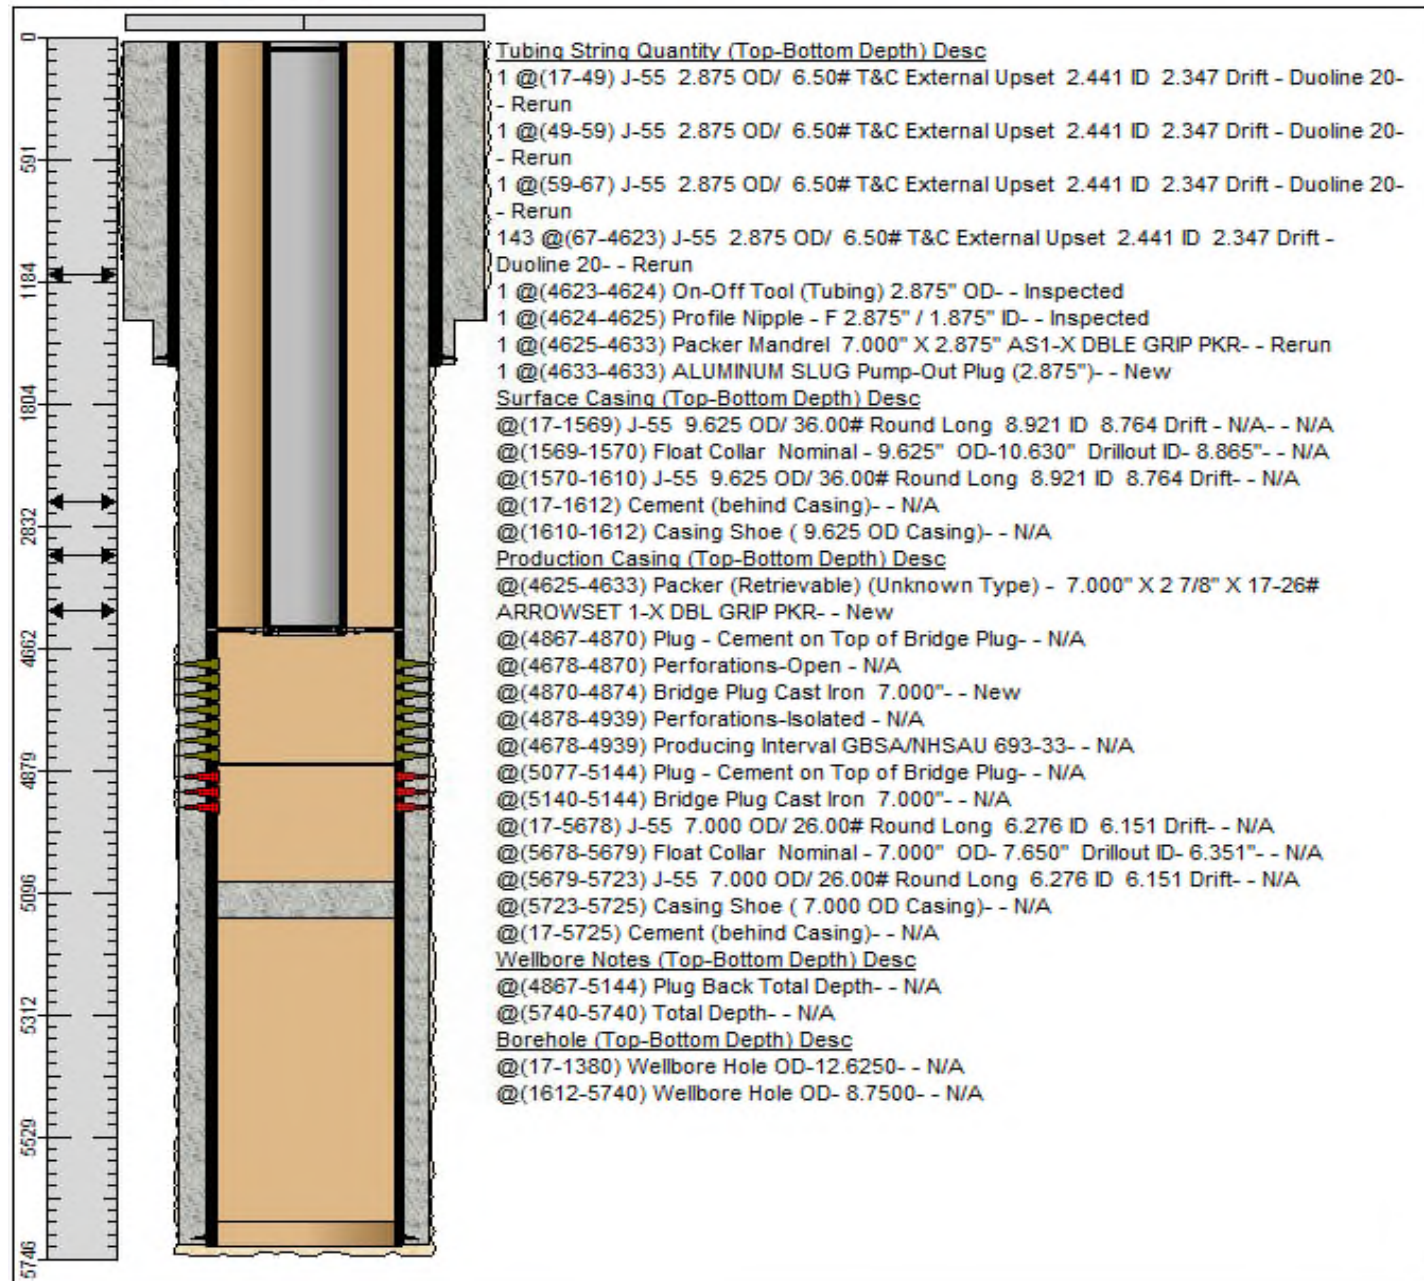

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-44718	OCCIDENTAL PERMIAN LTD	NORTH HOBBS G/SA UNIT	694	Oil	Active	1000	N	2188	W	C	33	185	38E	12/22/2018	4541	13.500 8.750	9.625 7.000	1655 5207	820 1110	Surf 0	Circ Calc	4661'-4930' GRAYBURG-SAN ANDRES	DV tool at 3,717'




Wellbore Diagram : NNSAU 694-33

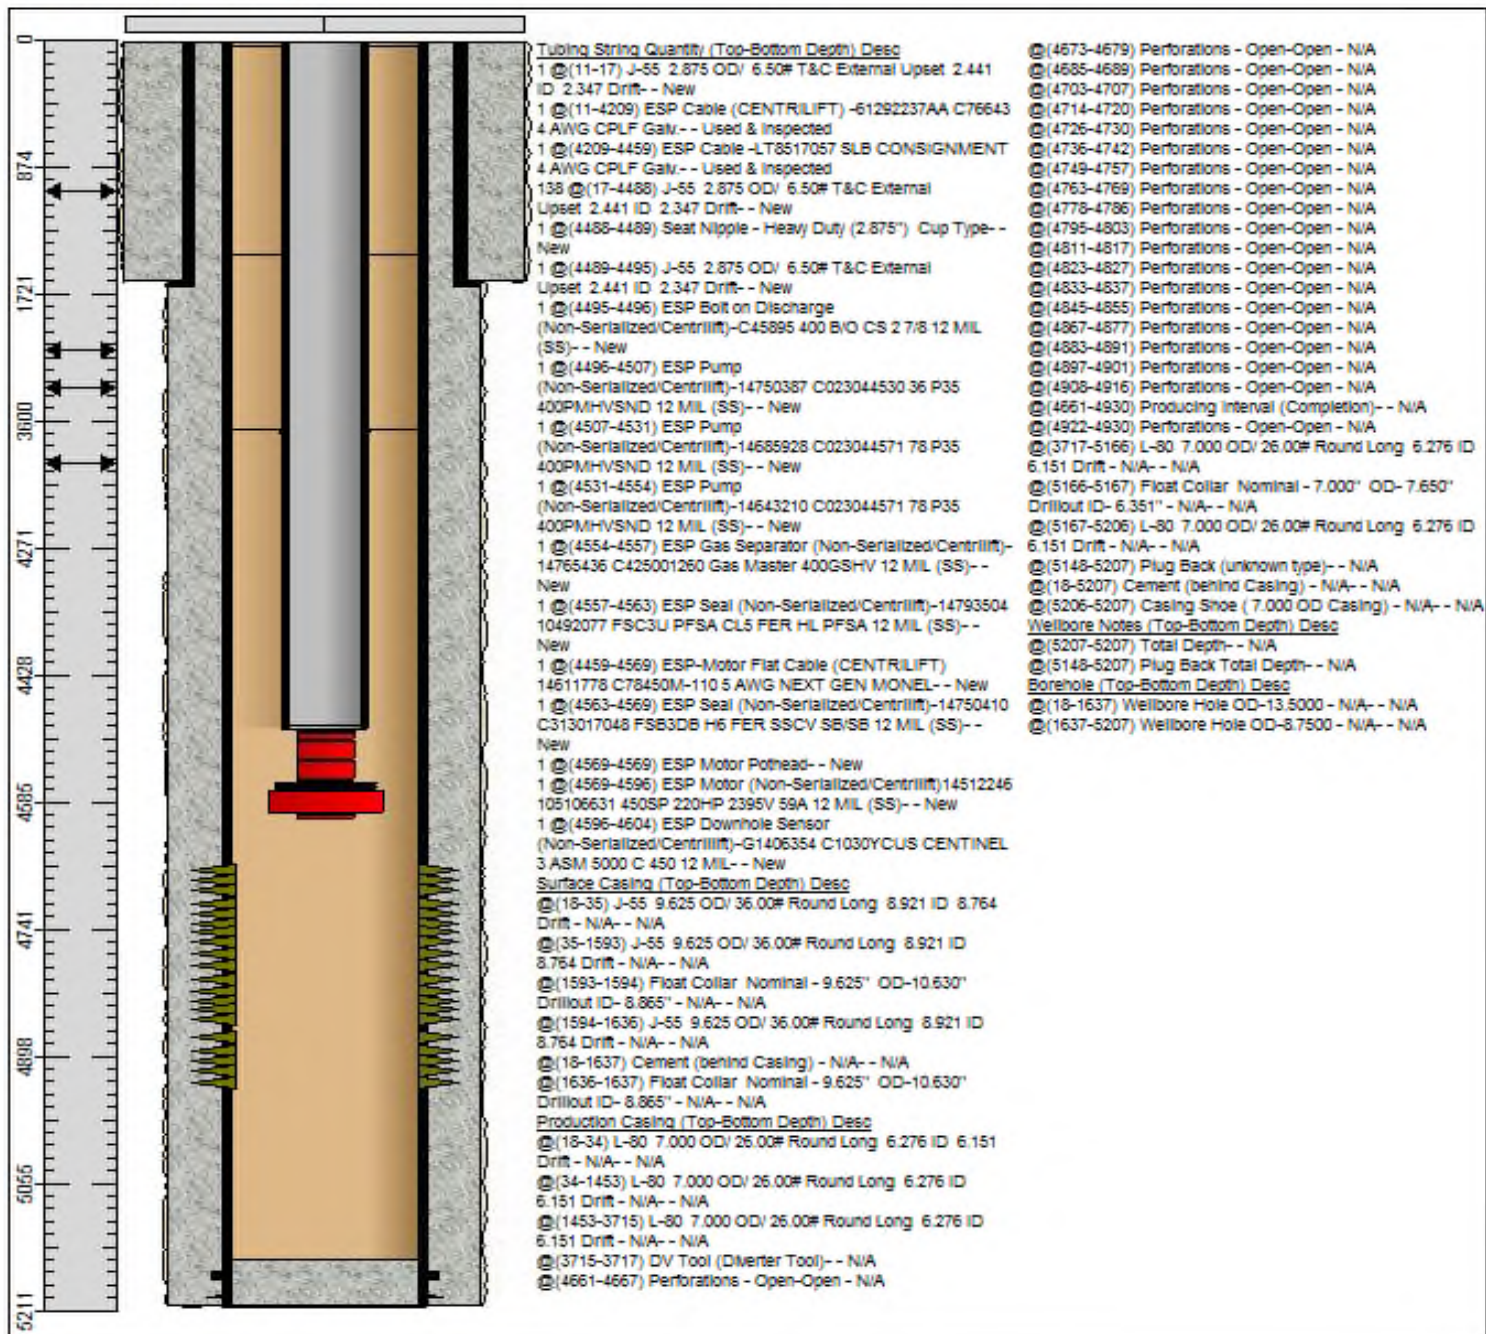

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-44719	OCCIDENTAL PERMIAN LTD	NORTH HOBBS G/SA	695	Oil	Active	950	N	2188	W	C	33	185	38E	12/30/2018	4446	13.500 8.750	9.625 7.000	1637 5224	885 885	Surf 0	Circ Calc	4789'-5074' GRAYBURG-SAN ANDRES	DV tool at 3,735'




Wellbore Diagram : NHSAU 695-33

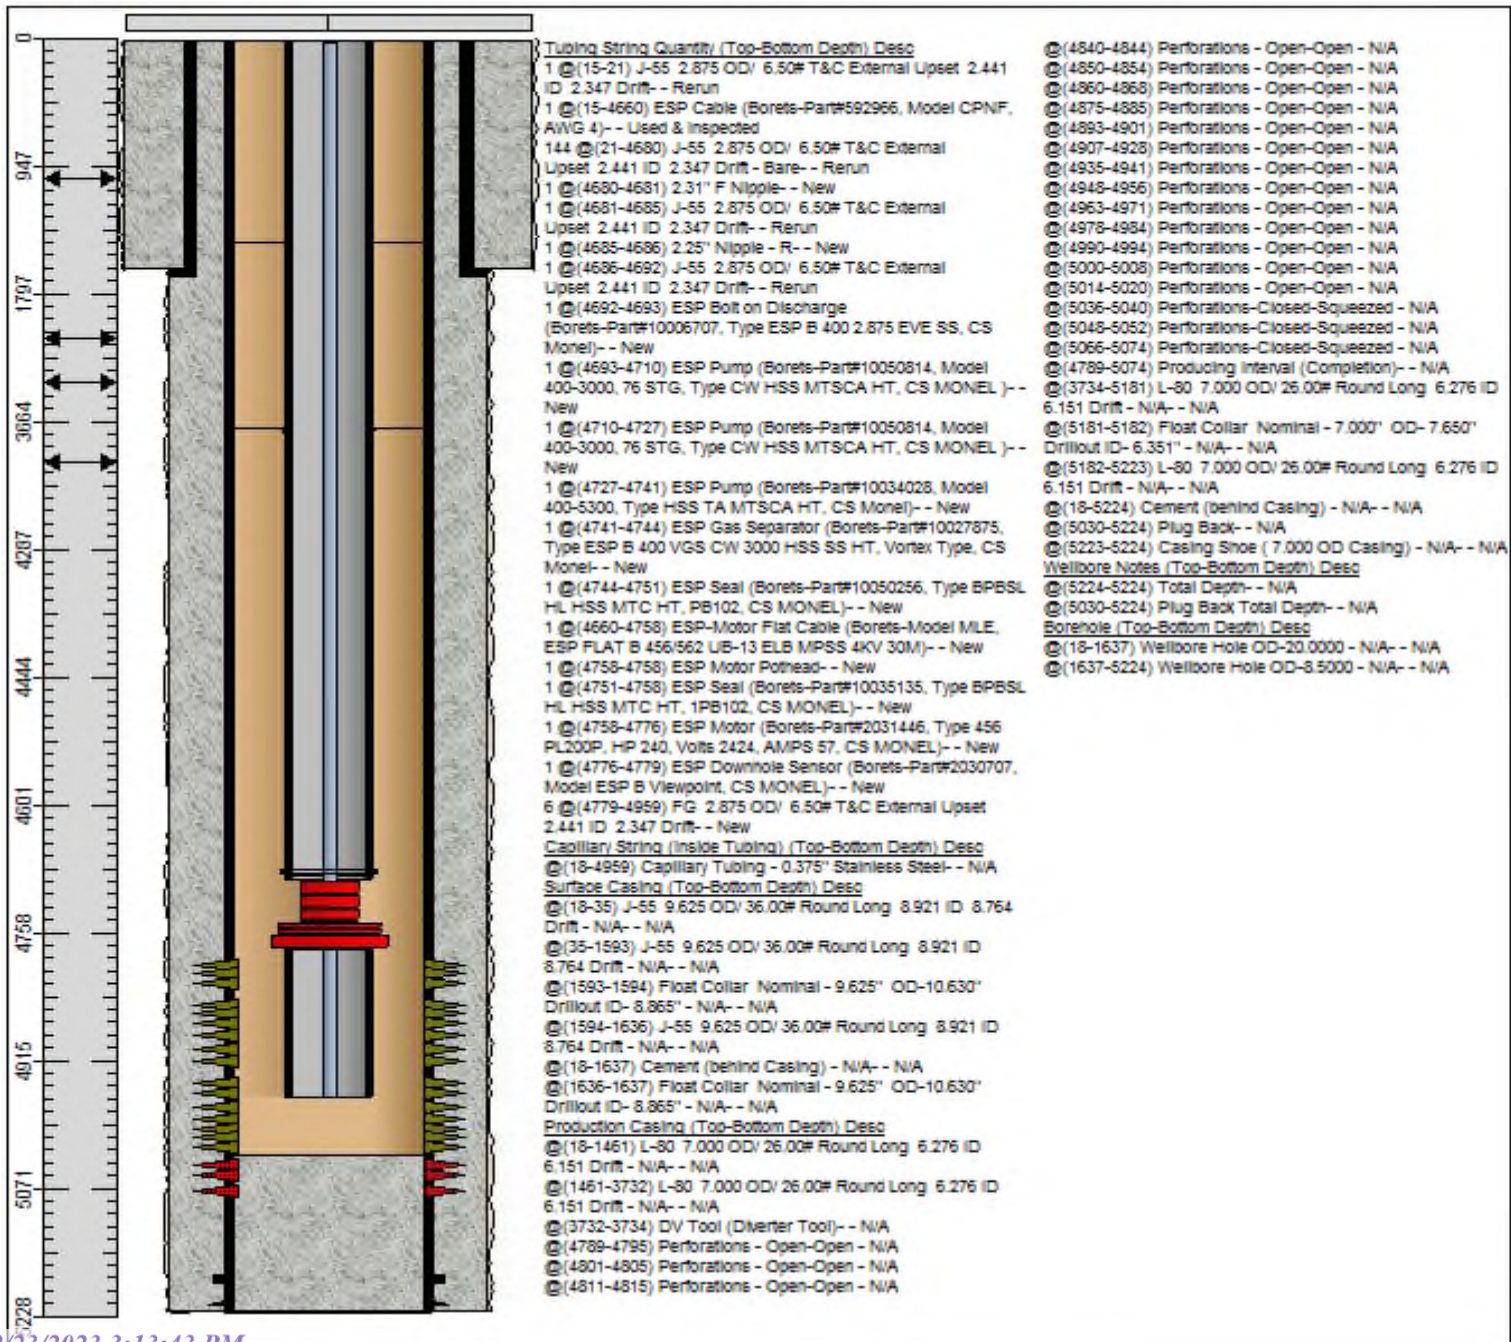

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-44721	OCCIDENTAL PERMIAN LTD	NORTH HOBBS G/SA	696	Oil	Active	1298	S	1702	W	N	33	185	38E	1/8/2019	4449	13.500 8.750	9.625 7.000	1593 4911	865 1155	Surf 0	Circ Calc	4421'-4723' GRAYBURG-SAN ANDRES	DV tool at 3,987'



Wellbore Diagram : NHS AU 696-33

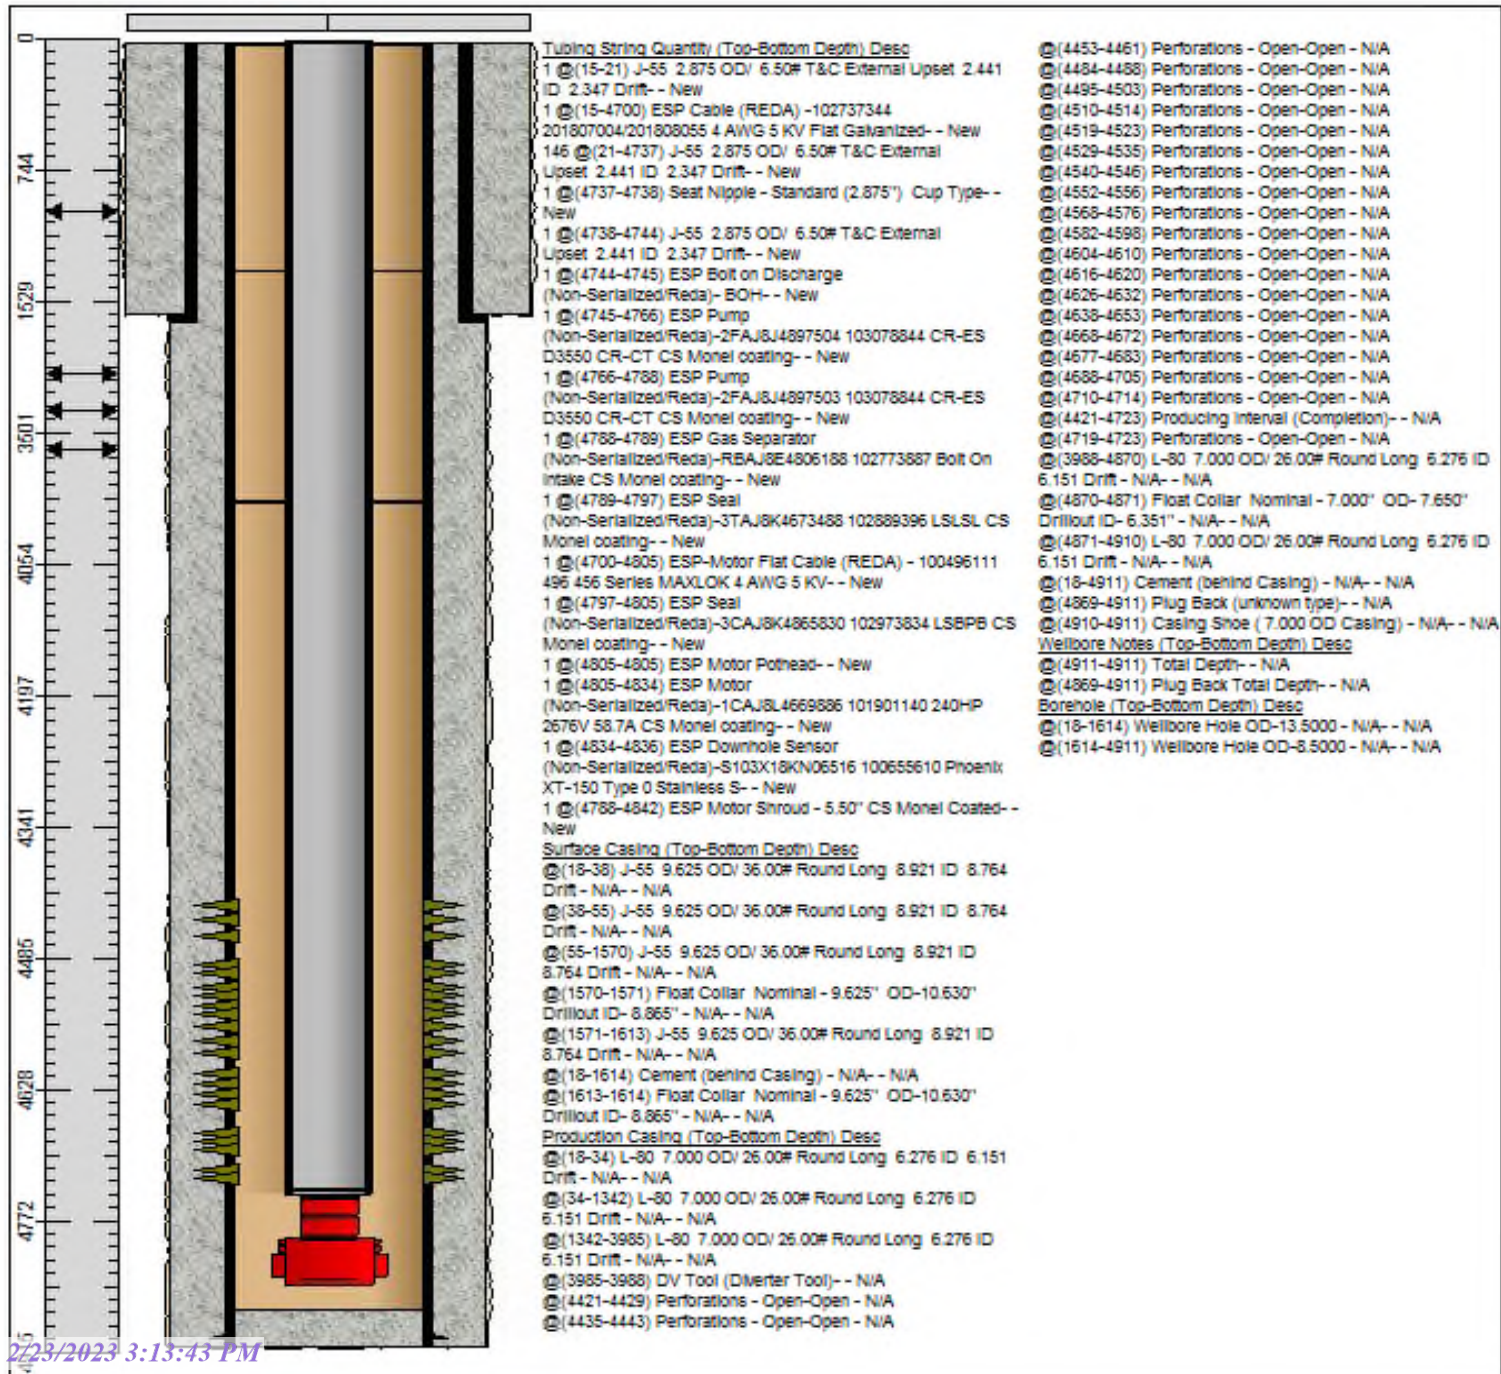

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-44720	OCCIDENTAL PERMIAN LTD	NORTH HOBBS G/SA	697	Oil	Active	1248	S	1702	W	N	33	18S	38E	1/15/2019	4469	13.375 8.750	9.625 7.000	1595 5017	865 835	Surf 0	Circ Calc	4519'-4835' GRAYBURG-SAN ANDRES	DV tool at 4,158'



Wellbore Diagram : NHSAU 697-33

Tubing String Quantity (Top-Bottom Depth) Desc

1 @ (10-16) J-55 2.875 OD/ 6.50# T&C External Upset 2.441 ID 2.347 Drift-- Rerun
 1 @ (10-286) ESP Cable (REDA)-102737344 4 AWG #4 FL LEAD Flat-- Inspected
 1 @ (286-4316) ESP Cable (REDA) - 102737344 4 AWG #4 FL LEAD Flat-- Inspected
 134 @ (16-4343) J-55 2.875 OD/ 6.50# T&C External Upset 2.441 ID 2.347 Drift-- Rerun
 1 @ (4343-4344) Seat Nipple - Standard (2.875") Cup Type-- Rerun
 1 @ (4344-4350) J-20 2.875 OD/ 6.50# T&C External Upset 2.441 ID 2.347 Drift-- Rerun
 1 @ (4350-4351) ESP Bolt on Discharge (Non-Serialized/Centrifuge) BOH 1260710-- Inspected
 1 @ (4351-4366) ESP Pump (Non-Serialized/Reda) - 102985262 Carbon Steel D3500N, 60 STGS, CR-- Inspected
 1 @ (4366-4388) ESP Pump (Non-Serialized/Reda)- 103078844 D3500N Carbon Steel, 91 STGS, CR-- Inspected
 1 @ (4388-4410) ESP Pump (Non-Serialized/Reda)-103078844 D3500N Carbon Steel, 91 STGS, CR-- Inspected
 1 @ (4410-4416) ESP Gas Handler (Reda)- 102735454 AGH D20-60 Carbon Steel-- Inspected
 1 @ (4416-4420) ESP Gas Separator (Non-Serialized/Reda)-101876828 VGSA D20-60 Redalloy-- Inspected
 1 @ (4420-4428) ESP Seal (Reda)-Part#102689396, LSLSL#5 OIL Carbon Steel-- New
 1 @ (4316-4436) ESP-Motor Flat Cable (REDA) - MAXLOK 400 KELB 6 AWG 5 KV-- Inspected
 1 @ (4428-4436) ESP Seal (Reda)102973834, LSPB#5 OIL Carbon Steel-- New
 1 @ (4436-4436) ESP Motor Pothead-- New
 1 @ (4436-4467) ESP Motor (Non-Serialized/Reda) - 101894029, 456 MAXIMUS, 270 HP, 2626 VOLT, 67.1 AMP, CARBON STEEL-- Inspected
 1 @ (4467-4469) ESP Downhole Sensor (Non-Serialized/Reda)-100655610 PHOENIX XT-150 TYPE 0, SERIES 375-- Inspected

Surface Casing (Top-Bottom Depth) Desc

@ (18-35) J-55 9.625 OD/ 36.00# Round Long 8.921 ID 8.764 Drift-- N/A-- N/A
 @ (35-1550) J-55 9.625 OD/ 36.00# Round Long 8.921 ID 8.764 Drift-- N/A-- N/A
 @ (1550-1551) Float Collar Nominal - 9.625" OD-10.630" Drillout ID- 8.865" - N/A-- N/A
 @ (1551-1593) J-55 9.625 OD/ 36.00# Round Long 8.921 ID 8.764 Drift-- N/A-- N/A
 @ (18-1595) Cement (behind Casing) - N/A-- N/A
 @ (1593-1595) Float Collar Nominal - 9.625" OD-10.630" Drillout ID- 8.865" - N/A-- N/A

Production Casing (Top-Bottom Depth) Desc


@ (18-34) L-80 7.000 OD/ 26.00# Round Long 6.276 ID 6.151 Drift-- N/A-- N/A
 @ (34-1396) Flag Joint - L-80 7.000 OD/ 26.00# Round Long 6.276 ID 6.151 Drift-- N/A-- N/A
 @ (1396-4156) L-80 7.000 OD/ 26.00# Round Long 6.276 ID 6.151 Drift-- N/A-- N/A
 @ (4156-4158) DV Tool (Diverter Tool)-- N/A
 @ (4519-4527) Perforations - Open-Open - N/A
 @ (4519-4527) Perforations-Closed-Squeezed - N/A
 @ (4534-4538) Perforations - Open-Open - N/A
 @ (4534-4538) Perforations-Closed-Squeezed - N/A
 @ (4545-4553) Perforations - Open-Open - N/A

@ (4545-4553) Perforations - Open-Open - N/A
 @ (4576-4580) Perforations - Open-Open - N/A
 @ (4576-4580) Perforations - Open-Open - N/A
 @ (4587-4593) Perforations - Open-Open - N/A
 @ (4587-4593) Perforations - Open-Open - N/A
 @ (4606-4614) Perforations - Open-Open - N/A
 @ (4606-4614) Perforations - Open-Open - N/A
 @ (4625-4631) Perforations - Open-Open - N/A
 @ (4625-4631) Perforations - Open-Open - N/A
 @ (4637-4645) Perforations - Open-Open - N/A
 @ (4637-4645) Perforations - Open-Open - N/A
 @ (4655-4663) Perforations - Open-Open - N/A
 @ (4655-4663) Perforations - Open-Open - N/A
 @ (4679-4687) Perforations - Open-Open - N/A
 @ (4679-4687) Perforations - Open-Open - N/A
 @ (4693-4699) Perforations - Open-Open - N/A
 @ (4693-4699) Perforations - Open-Open - N/A
 @ (4712-4718) Perforations - Open-Open - N/A
 @ (4712-4718) Perforations - Open-Open - N/A
 @ (4729-4739) Perforations - Open-Open - N/A
 @ (4729-4739) Perforations - Open-Open - N/A
 @ (4751-4757) Perforations - Open-Open - N/A
 @ (4751-4757) Perforations - Open-Open - N/A
 @ (4763-4769) Perforations - Open-Open - N/A
 @ (4763-4769) Perforations - Open-Open - N/A
 @ (4775-4779) Bridge Plug Cast Iron 7.000" - N/A
 @ (4519-4835) Producing Interval (Completion)-- N/A
 @ (4158-4975) L-80 7.000 OD/ 26.00# Round Long 6.276 ID 6.151 Drift-- N/A-- N/A
 @ (4975-4976) Float Collar Nominal - 7.000" OD- 7.650" Drillout ID- 6.351" - N/A-- N/A
 @ (4976-5016) L-80 7.000 OD/ 26.00# Round Long 6.276 ID 6.151 Drift-- N/A-- N/A
 @ (18-5017) Cement (behind Casing) - N/A-- N/A
 @ (5016-5017) Casing Shoe (7.000 OD Casing) - N/A-- N/A
 @ (4971-5017) Plug Back (unknown type)-- N/A
 Wellbore Notes (Top-Bottom Depth) Desc
 @ (5017-5017) Total Depth-- N/A
 @ (4775-5017) Plug Back Total Depth-- N/A
 Borehole (Top-Bottom Depth) Desc
 @ (18-1595) Wellbore Hole OD-13.5000 - N/A-- N/A
 @ (1595-5017) Wellbore Hole OD-8.5000 - N/A-- N/A

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-41643	OCCIDENTAL PERMIAN LTD	NORTH HOBBS G/SA	949	Oil	Active	2243	N	2046	W	F	33	185	38E	3/16/2014	4548.6	12.250 8.750	9.625 7.000	1626 5228	650 940	Surf Surf	Circ Circ	4630'-4885' GRAYBURG-SAN ANDRES	DV tool at 4,020'




Wellbore Diagram : NHSAU 949-33

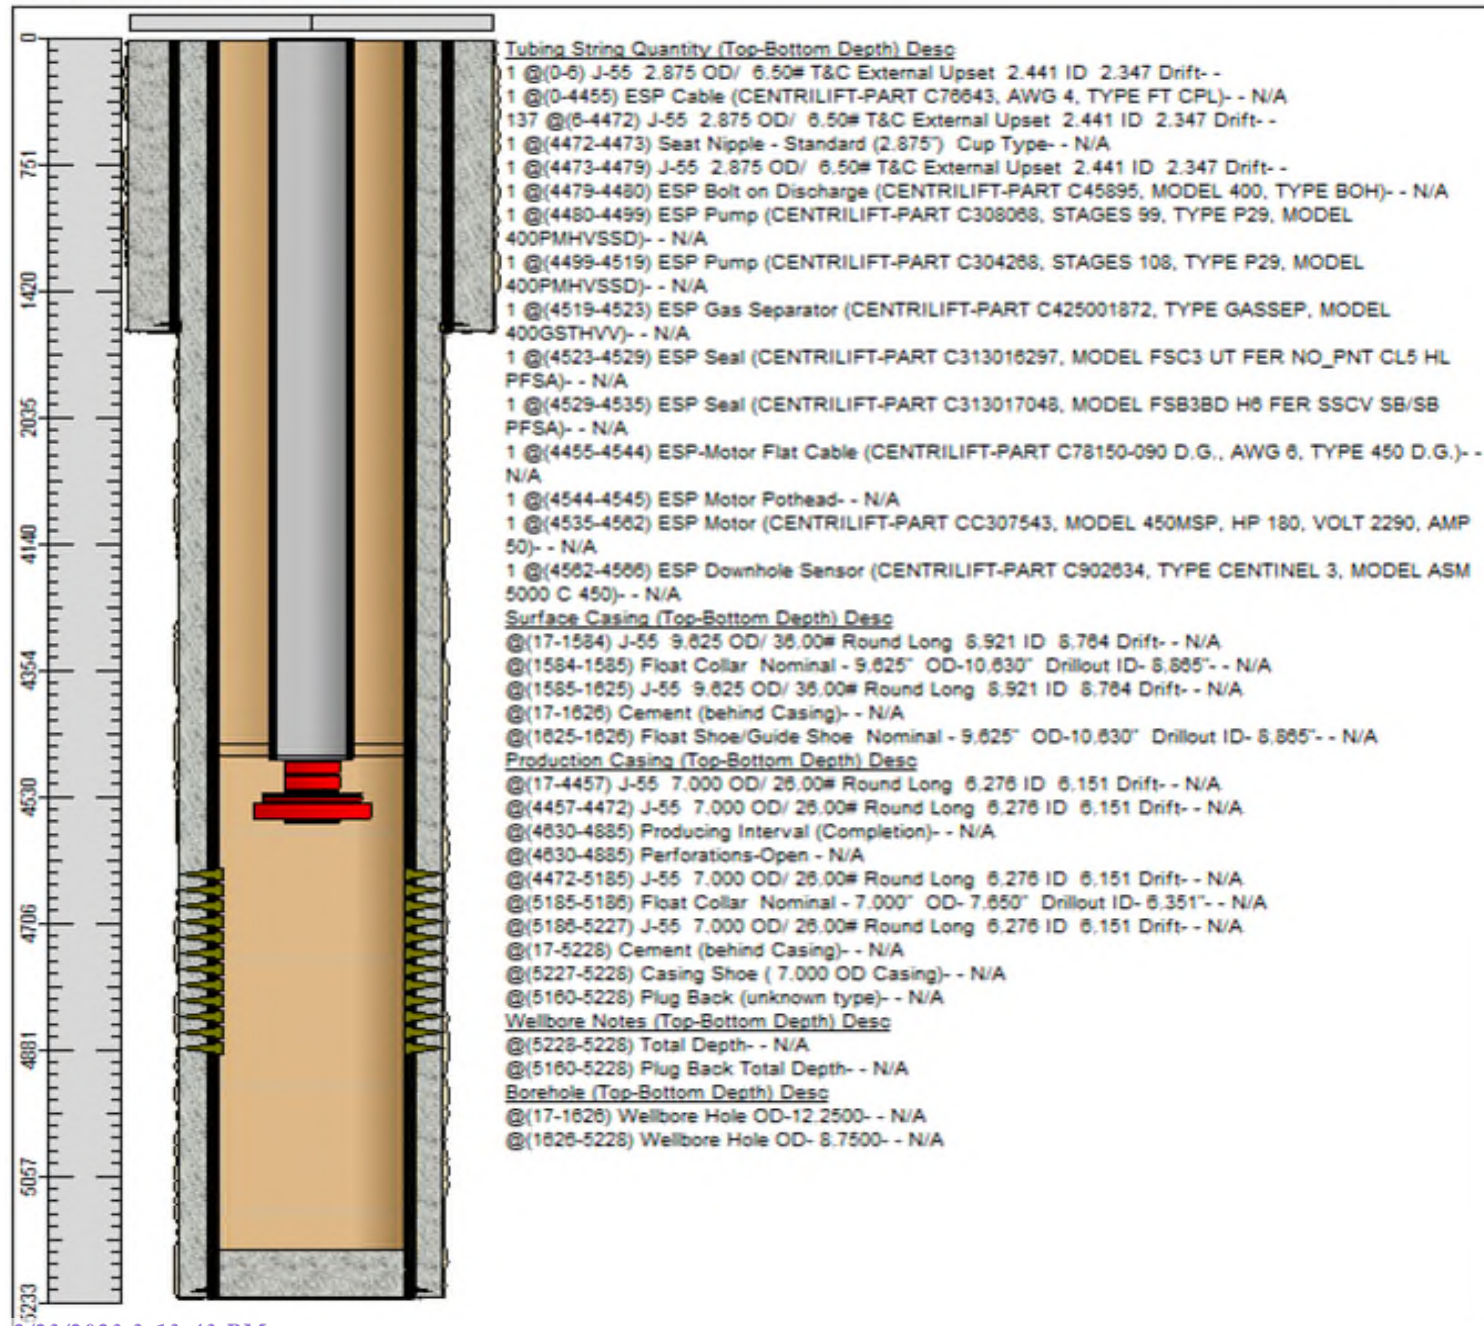

API NUMBER	OPERATOR	LEASE NAME	WELL NO.	WELL TYPE	STATUS	FTG. N/S	N/S	FTG. E/W	E/W	UNIT	SEC.	TSHP.	RNG.	DATE DRILLED	TVD (ft)	HOLE SIZE (in)	CSG. SIZE (in)	SET AT (ft)	SX. CMT.	CMT. TOP (ft)	MTD.	COMPLETION	REMARKS
30-025-41578	OCCIDENTAL PERMIAN LTD	NORTH HOBBS G/SA	948	Oil	Active	2094	N	1963	W	F	33	18S	38E	3/2/2014	4592	12.250 8.75	9.625 7.000	1638 4859	650 1010	Surf Circ	Circ	4308'-4568' GRAYBURG-SAN ANDRES	DV Tool at 3,779'



Wellbore Diagram : NHSAU 948-33

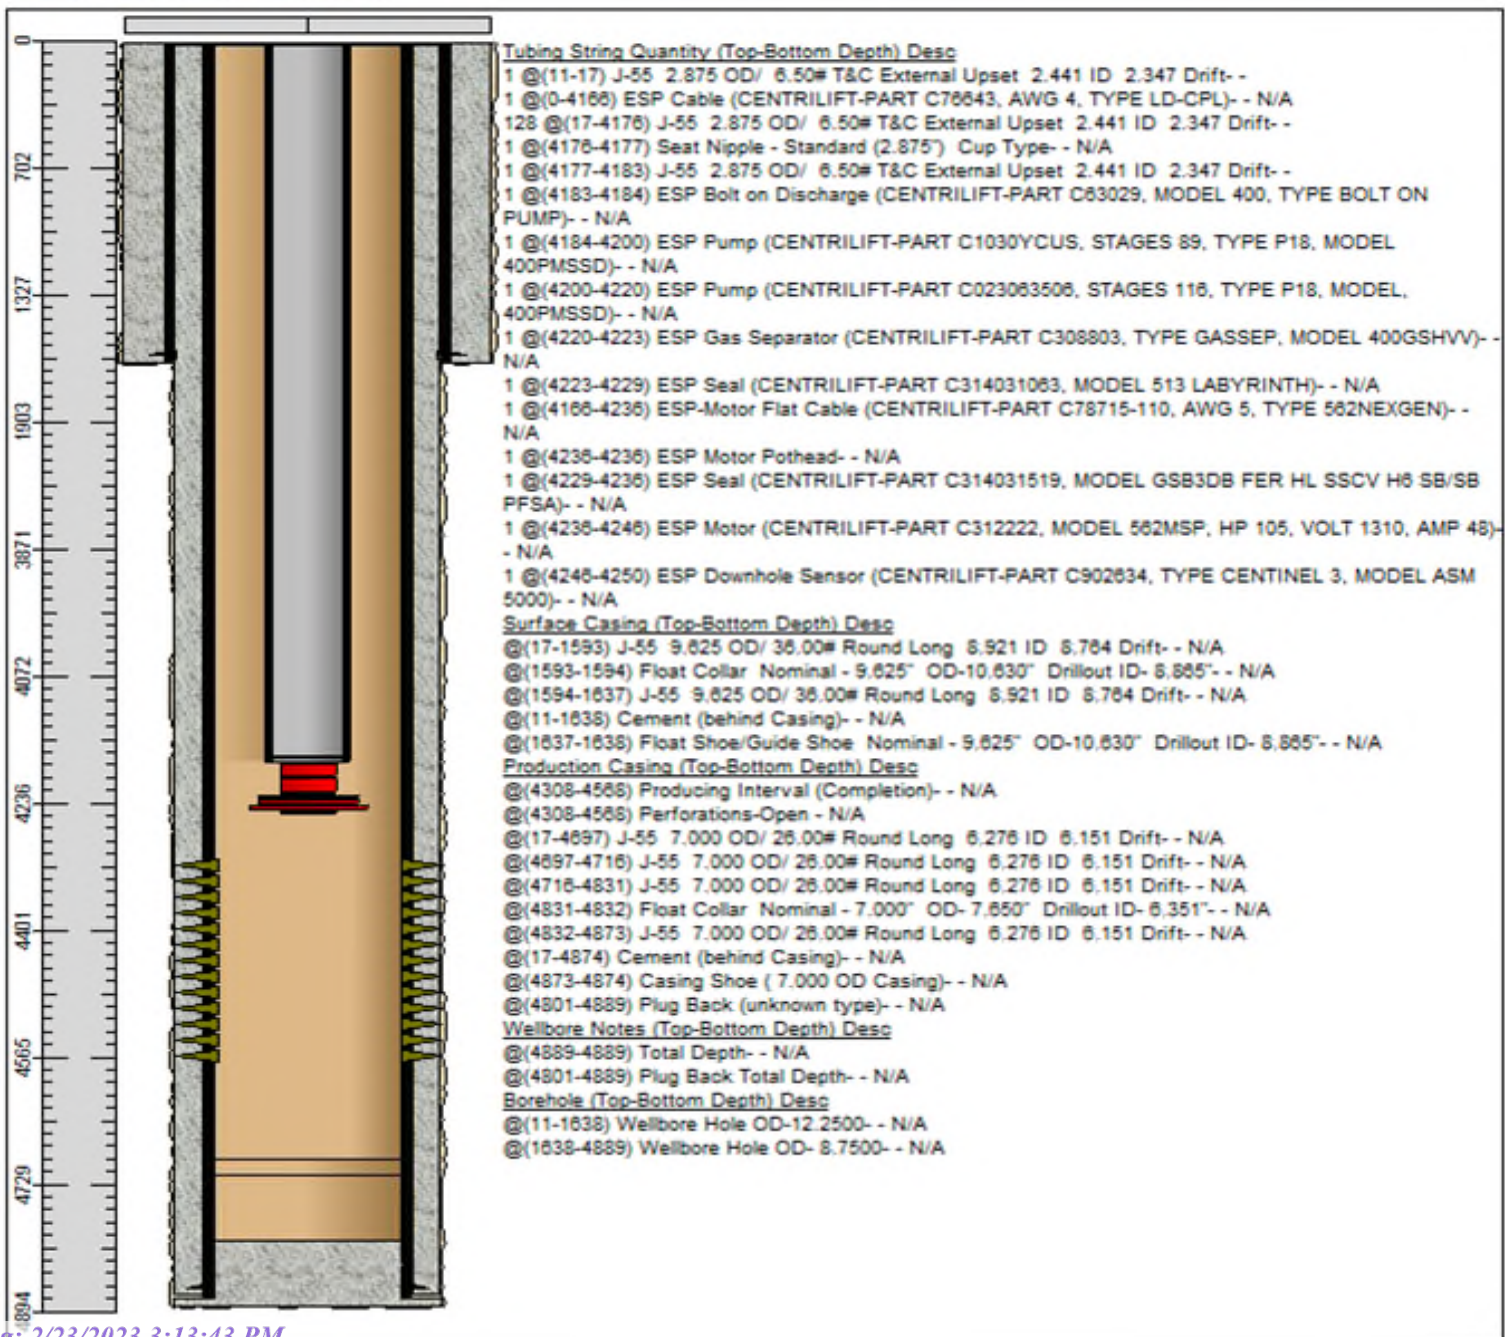

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 56863

CONDITIONS

Operator: OCCIDENTAL PERMIAN LTD P.O. Box 4294 Houston, TX 772104294	OGRID: 157984
	Action Number: 56863
	Action Type: [C-108] Fluid Injection Well (C-108)

CONDITIONS

Created By	Condition	Condition Date
mgebremichael	None	2/23/2023