



August 13, 2024

Victoria Venegas
Environmental Specialist
New Mexico Oil Conservation Division
506 W. Texas Ave.
Artesia, NM 88210

Re: Permit Modification Request for the Raptor Recycling Facility (1RF-524).

Ms. Venegas,

Select Water Solutions, LLC. (OGRD # 289068) would like to submit a permit modification request for the Select Raptor Recycle Facility (1RF-524). In addition to the leak detection pipe that was shown in the initial permit plans submitted and permitted by NM OCD, there is an additional effluent suction pipe in the same trench as the leak detection pipe. Select is also requesting a modification to add a 60K-bbl. Above Ground Storage Tank (AST) to the facility.

During construction of the facility, a second pipe was added to the leak detection trenches. This pipe is an 8-in DR11 Solid HDPE suction pipe and has a removable weatherproof cap installed on the upper end of the pipe to eliminate stormwater from entering into the leak detection sump. It is to be noted that the sole purpose of the addition of the effluent suction pipe is to allow for faster drainage of the containment in the case that there is a significant leak within the primary liner.

Changes to the operating plans, maintenance plans, and monitoring plans were made and will be provided in this submittal. Select intends to comply with all previously submitted variances granted and all previously approved permit conditions. It is to be noted that further variances requests are included in this request. The only deviations from the original permit will be the addition of an effluent suction pipe to the recycling containment and resultant operating modifications alongside the addition of an AST to the facility.

Enclosed in the package are all necessary documents that were affected by the changes in the placement of an effluent suction pipe in the recycle containments, and the addition of an AST to the facility along with new C-147 forms for all containments with the Modification box marked.

APPENDICES:

APPENDIX A	C-147 MODIFICATION FORMS
APPENDIX B	VARIANCE REQUESTS
APPENDIX C	AST SCHEMATIC
APPENDIX D	AST LEAK DETECTION PLAN
APPENDIX E	AS-BUILT SUMP DETAILS
APPENDIX F	UPDATED DESIGN & CONSTRUCTION PLAN
APPENDIX G	UPDATED MATERIAL SPECIFICATIONS
APPENDIX H	UPDATED OPERATIONS & MAINTENANCE PLAN
APPENDIX I	UPDATED CLOSURE PLAN & COST ESTIMATE



C147 MODIFICATION SUBMITTAL
RAPTOR RECYCLE FACILITY
SECTION 19, TOWNSHIP 18 SOUTH, RANGE 34 EAST
LEA COUNTY, NEW MEXICO
024251-00

A bond in the amount estimated will be filed accordingly once approved.

Should you have any questions or require additional information, please contact me by phone at 580-234-8780 or by email at mratke@envirotechconsulting.com at your convenience.

Thank you for your consideration.
Best regards,

ENVIROTECH ENGINEERING & CONSULTING, INC.

Mitchell Ratke, P.E.
Senior Project Engineer, Energy Infrastructure





C147 MODIFICATION SUBMITTAL
RAPTOR RECYCLE FACILITY
SECTION 19, TOWNSHIP 18 SOUTH, RANGE 34 EAST
LEA COUNTY, NEW MEXICO
024251-00

APPENDIX A

C-147 MODIFICATION FORMS

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-147
Revised April 3, 2017

Recycling Facility and/or Recycling Containment

Type of Facility: ☒ Recycling Facility ☒ Recycling Containment*
Type of action: ☐ Permit ☐ Registration
☒ Modification ☐ Extension
☐ Closure ☐ Other (explain) _____

* At the time C-147 is submitted to the division for a Recycling Containment, a copy shall be provided to the surface owner.

Be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

1.

Operator: Select Water Solutions, LLC. (For multiple operators attach page with information) OGRID #: 289068
Address: 1820 North I-35, Gainesville, TX 76240
Facility or well name (include API# if associated with a well): Raptor Recycle Facility AST
OCD Permit Number: 1RF-524 (For new facilities the permit number will be assigned by the district office)
U/L or Qtr/Qtr SE/4 Section 19 Township 18 South Range 34 East County: Lea
Surface Owner: ☐ Federal ☐ State ☒ Private ☐ Tribal Trust or Indian Allotment

2.

☐ **Recycling Facility:**

Location of recycling facility (if applicable): Latitude 32.728048° Longitude -103.599026° NAD83

Proposed Use: ☒ Drilling* ☒ Completion* ☒ Production* ☒ Plugging *

**The re-use of produced water may NOT be used until fresh water zones are cased and cemented*

☐ Other, *requires permit for other uses. Describe use, process, testing, volume of produced water and ensure there will be no adverse impact on groundwater or surface water.*

☒ Fluid Storage

☐ Above ground tanks ☒ Recycling containment ☐ Activity permitted under 19.15.17 NMAC explain type _____

☐ Activity permitted under 19.15.36 NMAC explain type: _____ ☐ Other explain _____

☐ For multiple or additional recycling containments, attach design and location information of each containment

☐ **Closure Report (required within 60 days of closure completion):** ☐ Recycling Facility Closure Completion Date: _____

3.

☒ **Recycling Containment:**

☐ Annual Extension after initial 5 years (attach summary of monthly leak detection inspections for previous year)

Center of Recycling Containment (if applicable): Latitude 32.728529° Longitude -103.594782° NAD83

☐ For multiple or additional recycling containments, attach design and location information of each containment

☒ Lined ☐ Liner type: Thickness 40/40 mil ☒ LLDPE ☐ HDPE ☐ PVC ☐ Other _____

☐ String-Reinforced

Liner Seams: ☒ Welded ☐ Factory ☐ Other _____ Volume: 60,000 bbl Dimensions: L _____ x W 191 x D 12

☐ Recycling Containment Closure Completion Date: _____

4.

Bonding:

- ☐ Covered under bonding pursuant to 19.15.8 NMAC per 19.15.34.15(A)(2) NMAC (These containments are limited to only the wells owned or operated by the owners of the containment.)
- ☒ Bonding in accordance with 19.15.34.15(A)(1). Amount of bond \$4,987,010.58 (work on these facilities cannot commence until bonding amounts are approved)
- ☒ Attach closure cost estimate and documentation on how the closure cost was calculated.

5.

Fencing:

- ☐ Four foot height, four strands of barbed wire evenly spaced between one and four feet
- ☒ Alternate. Please specify 8-ft Tall Wire Mesh Game Fence

6.

Signs:

- ☒ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers
- ☐ Signed in compliance with 19.15.16.8 NMAC

7.

Variances:

Justifications and/or demonstrations that the proposed variance will afford reasonable protection against contamination of fresh water, human health, and the environment.

Check the below box only if a variance is requested:

☒ Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. If a Variance is requested, include the variance information on a separate page and attach it to the C-147 as part of the application.

If a Variance is requested, it must be approved prior to implementation.

8.

Siting Criteria for Recycling Containment

Instructions: The applicant must provide attachments that demonstrate compliance for each siting criteria below as part of the application. Potential examples of the siting attachment source material are provided below under each criteria.

General siting**Ground water is less than 50 feet below the bottom of the Recycling Containment.**

NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells

☐ Yes ☒ No
☐ NA

Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.

☐ Yes ☒ No
☐ NA

- Written confirmation or verification from the municipality; written approval obtained from the municipality

Within the area overlying a subsurface mine.

☐ Yes ☒ No

- Written confirmation or verification or map from the NM EMNRD-Mining and Minerals Division

Within an unstable area.

☐ Yes ☒ No

- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; topographic map

Within a 100-year floodplain. FEMA map

☐ Yes ☒ No

Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).

☐ Yes ☒ No

- Topographic map; visual inspection (certification) of the proposed site

Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.

☐ Yes ☒ No

- Visual inspection (certification) of the proposed site; aerial photo; satellite image

Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application.

☐ Yes ☒ No

- NM Office of the State Engineer - iWATERS database search; visual inspection (certification) of the proposed site

Within 500 feet of a wetland.

☐ Yes ☒ No

- US Fish and Wildlife Wetland Identification map; topographic map; visual inspection (certification) of the proposed site

9.

Recycling Facility and/or Containment Checklist:


Instructions: Each of the following items must be attached to the application. Indicate, by a check mark in the box, that the documents are attached.

- ☒ Design Plan - based upon the appropriate requirements.
- ☒ Operating and Maintenance Plan - based upon the appropriate requirements.
- ☒ Closure Plan - based upon the appropriate requirements.
- ☒ Site Specific Groundwater Data -
- ☒ Siting Criteria Compliance Demonstrations -
- ☒ Certify that notice of the C-147 (only) has been sent to the surface owner(s)

10.

Operator Application Certification:

I hereby certify that the information and attachments submitted with this application are true, accurate and complete to the best of my knowledge and belief.

Name (Print): Timsan Bricker Title: Environmental Coordinator
Signature:  Date: 8/23/2024
e-mail address: tbricker@selectwater.com Telephone: 575-200-7551

11.

OCD Representative Signature: Victoria Venegas Approval Date: 08/28/2024

Title: Environmental Specialist OCD Permit Number: 1RF-524

- ☒ OCD Conditions _____
- ☐ Additional OCD Conditions on Attachment

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-147
Revised April 3, 2017

Recycling Facility and/or Recycling Containment

Type of Facility: ☒ Recycling Facility ☒ Recycling Containment*
Type of action: ☐ Permit ☐ Registration
☒ Modification ☐ Extension
☐ Closure ☐ Other (explain) _____

* At the time C-147 is submitted to the division for a Recycling Containment, a copy shall be provided to the surface owner.

Be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

1.
Operator: Select Water Solutions, LLC. (For multiple operators attach page with information) OGRID #: 289068
Address: 1820 North I-35, Gainesville, TX 76240
Facility or well name (include API# if associated with a well): Raptor Recycle Facility East Storage Pit
OCD Permit Number: 1RF-524 (For new facilities the permit number will be assigned by the district office)
U/L or Qtr/Qtr SE/4 Section 19 Township 18 South Range 34 East County: Lea
Surface Owner: ☐ Federal ☐ State ☒ Private ☐ Tribal Trust or Indian Allotment

2.
☐ **Recycling Facility:**
Location of recycling facility (if applicable): Latitude 32.728048° Longitude -103.599026° NAD83
Proposed Use: ☒ Drilling* ☒ Completion* ☒ Production* ☒ Plugging*
**The re-use of produced water may NOT be used until fresh water zones are cased and cemented*
☐ Other, *requires permit for other uses. Describe use, process, testing, volume of produced water and ensure there will be no adverse impact on groundwater or surface water.*
☒ Fluid Storage
☐ Above ground tanks ☒ Recycling containment ☐ Activity permitted under 19.15.17 NMAC explain type _____
☐ Activity permitted under 19.15.36 NMAC explain type: _____ ☐ Other explain _____
☐ For multiple or additional recycling containments, attach design and location information of each containment
☐ **Closure Report (required within 60 days of closure completion):** ☐ Recycling Facility Closure Completion Date: _____

3.
☒ **Recycling Containment:**
☐ Annual Extension after initial 5 years (attach summary of monthly leak detection inspections for previous year)
Center of Recycling Containment (if applicable): Latitude 32.727481° Longitude -103.594782° NAD83
☐ For multiple or additional recycling containments, attach design and location information of each containment
☒ Lined ☐ Liner type: Thickness 60/40 mil ☐ LLDPE ☒ HDPE ☐ PVC ☐ Other _____
☐ String-Reinforced
Liner Seams: ☒ Welded ☐ Factory ☐ Other _____ Volume: 994,275 bbl Dimensions: L835 x W490 x D24
☐ Recycling Containment Closure Completion Date: _____

4.

Bonding:

- ☐ Covered under bonding pursuant to 19.15.8 NMAC per 19.15.34.15(A)(2) NMAC (These containments are limited to only the wells owned or operated by the owners of the containment.)
- ☒ Bonding in accordance with 19.15.34.15(A)(1). Amount of bond \$ 4,987,010.58 (work on these facilities cannot commence until bonding amounts are approved)
- ☒ Attach closure cost estimate and documentation on how the closure cost was calculated.

5.

Fencing:

- ☐ Four foot height, four strands of barbed wire evenly spaced between one and four feet
- ☒ Alternate. Please specify 8-ft Tall Wire Mesh Game Fence

6.

Signs:

- ☒ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers
- ☐ Signed in compliance with 19.15.16.8 NMAC

7.

Variances:

Justifications and/or demonstrations that the proposed variance will afford reasonable protection against contamination of fresh water, human health, and the environment.

Check the below box only if a variance is requested:

☒ Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. If a Variance is requested, include the variance information on a separate page and attach it to the C-147 as part of the application.

If a Variance is requested, it must be approved prior to implementation.

8.

Siting Criteria for Recycling Containment

Instructions: The applicant must provide attachments that demonstrate compliance for each siting criteria below as part of the application. Potential examples of the siting attachment source material are provided below under each criteria.

General siting**Ground water is less than 50 feet below the bottom of the Recycling Containment.**

NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells

☐ Yes ☒ No
☐ NA

Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.

☐ Yes ☒ No
☐ NA

- Written confirmation or verification from the municipality; written approval obtained from the municipality

Within the area overlying a subsurface mine.

☐ Yes ☒ No

- Written confirmation or verification or map from the NM EMNRD-Mining and Minerals Division

Within an unstable area.

☐ Yes ☒ No

- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; topographic map

Within a 100-year floodplain. FEMA map

☐ Yes ☒ No

Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).

☐ Yes ☒ No

- Topographic map; visual inspection (certification) of the proposed site

Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.

☐ Yes ☒ No

- Visual inspection (certification) of the proposed site; aerial photo; satellite image

Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application.

☐ Yes ☒ No

- NM Office of the State Engineer - iWATERS database search; visual inspection (certification) of the proposed site

Within 500 feet of a wetland.

☐ Yes ☒ No

- US Fish and Wildlife Wetland Identification map; topographic map; visual inspection (certification) of the proposed site

9.

Recycling Facility and/or Containment Checklist:


Instructions: Each of the following items must be attached to the application. Indicate, by a check mark in the box, that the documents are attached.

- ☒ Design Plan - based upon the appropriate requirements.
- ☒ Operating and Maintenance Plan - based upon the appropriate requirements.
- ☒ Closure Plan - based upon the appropriate requirements.
- ☒ Site Specific Groundwater Data -
- ☒ Siting Criteria Compliance Demonstrations –
- ☒ Certify that notice of the C-147 (only) has been sent to the surface owner(s)

10.

Operator Application Certification:

I hereby certify that the information and attachments submitted with this application are true, accurate and complete to the best of my knowledge and belief.

Name (Print): Timsan Bricker Title: Environmental Coordinator
Signature:  Date: 8/23/2024
e-mail address: tbricker@selectwater.com Telephone: 575-200-7551

11.

OCD Representative Signature: _____ **Approval Date:** _____

Title: _____ **OCD Permit Number:** _____

- ☐ OCD Conditions _____
- ☐ Additional OCD Conditions on Attachment

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-147
Revised April 3, 2017

Recycling Facility and/or Recycling Containment

Type of Facility: ☒ Recycling Facility ☒ Recycling Containment*
Type of action: ☐ Permit ☐ Registration
☒ Modification ☐ Extension
☐ Closure ☐ Other (explain) _____

* At the time C-147 is submitted to the division for a Recycling Containment, a copy shall be provided to the surface owner.

Be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

1.
Operator: Select Water Solutions, LLC. (For multiple operators attach page with information) OGRID #: 289068
Address: 1820 North I-35, Gainesville, TX 76240
Facility or well name (include API# if associated with a well): Raptor Recycle Facility East Treatment Pit
OCD Permit Number: 1RF-524 (For new facilities the permit number will be assigned by the district office)
U/L or Qtr/Qtr SE/4 Section 19 Township 18 South Range 34 East County: Lea
Surface Owner: ☐ Federal ☐ State ☒ Private ☐ Tribal Trust or Indian Allotment

2.
☐ **Recycling Facility:**
Location of recycling facility (if applicable): Latitude 32.728048° Longitude -103.599026° NAD83
Proposed Use: ☒ Drilling* ☒ Completion* ☒ Production* ☒ Plugging*
**The re-use of produced water may NOT be used until fresh water zones are cased and cemented*
☐ Other, *requires permit for other uses. Describe use, process, testing, volume of produced water and ensure there will be no adverse impact on groundwater or surface water.*
☒ Fluid Storage
☐ Above ground tanks ☒ Recycling containment ☐ Activity permitted under 19.15.17 NMAC explain type _____
☐ Activity permitted under 19.15.36 NMAC explain type: _____ ☐ Other explain _____
☐ For multiple or additional recycling containments, attach design and location information of each containment
☐ **Closure Report (required within 60 days of closure completion):** ☐ Recycling Facility Closure Completion Date: _____

3.
☒ **Recycling Containment:**
☐ Annual Extension after initial 5 years (attach summary of monthly leak detection inspections for previous year)
Center of Recycling Containment (if applicable): Latitude 32.728807° Longitude -103.594365° NAD83
☐ For multiple or additional recycling containments, attach design and location information of each containment
☒ Lined ☐ Liner type: Thickness 60/40 mil ☐ LLDPE ☒ HDPE ☐ PVC ☐ Other _____
☐ String-Reinforced
Liner Seams: ☒ Welded ☐ Factory ☐ Other _____ Volume: 50,413 bbl Dimensions: L200 x W200 x D19
☐ Recycling Containment Closure Completion Date: _____

4.

Bonding:

- ☐ Covered under bonding pursuant to 19.15.8 NMAC per 19.15.34.15(A)(2) NMAC (These containments are limited to only the wells owned or operated by the owners of the containment.)
- ☒ Bonding in accordance with 19.15.34.15(A)(1). Amount of bond \$4,987,010.58 (work on these facilities cannot commence until bonding amounts are approved)
- ☒ Attach closure cost estimate and documentation on how the closure cost was calculated.

5.

Fencing:

- ☐ Four foot height, four strands of barbed wire evenly spaced between one and four feet
- ☒ Alternate. Please specify 8-ft Tall Wire Mesh Game Fence

6.

Signs:

- ☒ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers
- ☐ Signed in compliance with 19.15.16.8 NMAC

7.

Variances:

Justifications and/or demonstrations that the proposed variance will afford reasonable protection against contamination of fresh water, human health, and the environment.

Check the below box only if a variance is requested:

☒ Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. If a Variance is requested, include the variance information on a separate page and attach it to the C-147 as part of the application.

If a Variance is requested, it must be approved prior to implementation.

8.

Siting Criteria for Recycling Containment

Instructions: The applicant must provide attachments that demonstrate compliance for each siting criteria below as part of the application. Potential examples of the siting attachment source material are provided below under each criteria.

General siting**Ground water is less than 50 feet below the bottom of the Recycling Containment.**

NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells

☐ Yes ☒ No
☐ NA

Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.

- Written confirmation or verification from the municipality; written approval obtained from the municipality

☐ Yes ☒ No
☐ NA

Within the area overlying a subsurface mine.

- Written confirmation or verification or map from the NM EMNRD-Mining and Minerals Division

☐ Yes ☒ No

Within an unstable area.

- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; topographic map

☐ Yes ☒ No

Within a 100-year floodplain. FEMA map

☐ Yes ☒ No

Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).

- Topographic map; visual inspection (certification) of the proposed site

☐ Yes ☒ No

Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.

- Visual inspection (certification) of the proposed site; aerial photo; satellite image

☐ Yes ☒ No

Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application.

- NM Office of the State Engineer - iWATERS database search; visual inspection (certification) of the proposed site

☐ Yes ☒ No

Within 500 feet of a wetland.

- US Fish and Wildlife Wetland Identification map; topographic map; visual inspection (certification) of the proposed site

☐ Yes ☒ No

9.

Recycling Facility and/or Containment Checklist:


Instructions: Each of the following items must be attached to the application. Indicate, by a check mark in the box, that the documents are attached.

- ☒ Design Plan - based upon the appropriate requirements.
- ☒ Operating and Maintenance Plan - based upon the appropriate requirements.
- ☒ Closure Plan - based upon the appropriate requirements.
- ☒ Site Specific Groundwater Data -
- ☒ Siting Criteria Compliance Demonstrations –
- ☒ Certify that notice of the C-147 (only) has been sent to the surface owner(s)

10.

Operator Application Certification:

I hereby certify that the information and attachments submitted with this application are true, accurate and complete to the best of my knowledge and belief.

Name (Print): Timsan Bricker Title: Environmental Coordinator
Signature:  Date: 8/23/2024
e-mail address: tbricker@selectwater.com Telephone: 575-200-7551

11.

OCD Representative Signature: _____ **Approval Date:** _____

Title: _____ **OCD Permit Number:** _____

- ☐ OCD Conditions _____
- ☐ Additional OCD Conditions on Attachment

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-147
Revised April 3, 2017

Recycling Facility and/or Recycling Containment

Type of Facility: ☒ Recycling Facility ☒ Recycling Containment*
Type of action: ☐ Permit ☐ Registration
☒ Modification ☐ Extension
☐ Closure ☐ Other (explain) _____

* At the time C-147 is submitted to the division for a Recycling Containment, a copy shall be provided to the surface owner.

Be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

1.
Operator: Select Water Solutions, LLC. (For multiple operators attach page with information) OGRID #: 289068
Address: 1820 North I-35, Gainesville, TX 76240
Facility or well name (include API# if associated with a well): Raptor Recycle Facility North Storage Pit
OCD Permit Number: 1RF-524 (For new facilities the permit number will be assigned by the district office)
U/L or Qtr/Qtr SE/4 Section 19 Township 18 South Range 34 East County: Lea
Surface Owner: ☐ Federal ☐ State ☒ Private ☐ Tribal Trust or Indian Allotment

2.
☐ **Recycling Facility:**
Location of recycling facility (if applicable): Latitude 32.728048° Longitude -103.599026° NAD83
Proposed Use: ☒ Drilling* ☒ Completion* ☒ Production* ☒ Plugging*
**The re-use of produced water may NOT be used until fresh water zones are cased and cemented*
☐ Other, *requires permit for other uses. Describe use, process, testing, volume of produced water and ensure there will be no adverse impact on groundwater or surface water.*
☒ Fluid Storage
☐ Above ground tanks ☒ Recycling containment ☐ Activity permitted under 19.15.17 NMAC explain type _____
☐ Activity permitted under 19.15.36 NMAC explain type: _____ ☐ Other explain _____
☐ For multiple or additional recycling containments, attach design and location information of each containment
☐ **Closure Report (required within 60 days of closure completion):** ☐ Recycling Facility Closure Completion Date: _____

3.
☒ **Recycling Containment:**
☐ Annual Extension after initial 5 years (attach summary of monthly leak detection inspections for previous year)
Center of Recycling Containment (if applicable): Latitude 32.731359° Longitude -103.597832° NAD83
☐ For multiple or additional recycling containments, attach design and location information of each containment
☒ Lined ☐ Liner type: Thickness 60/40 mil ☐ LLDPE ☒ HDPE ☐ PVC ☐ Other _____
☐ String-Reinforced
Liner Seams: ☒ Welded ☐ Factory ☐ Other _____ Volume: 994,275 bbl Dimensions: L835 x W490 x D24
☐ Recycling Containment Closure Completion Date: _____

4.

Bonding:

- ☐ Covered under bonding pursuant to 19.15.8 NMAC per 19.15.34.15(A)(2) NMAC (These containments are limited to only the wells owned or operated by the owners of the containment.)
- ☒ Bonding in accordance with 19.15.34.15(A)(1). Amount of bond \$ 4,987,010.58 (work on these facilities cannot commence until bonding amounts are approved)
- ☒ Attach closure cost estimate and documentation on how the closure cost was calculated.

5.

Fencing:

- ☐ Four foot height, four strands of barbed wire evenly spaced between one and four feet
- ☒ Alternate. Please specify 8-ft Tall Wire Mesh Game Fence

6.

Signs:

- ☒ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers
- ☐ Signed in compliance with 19.15.16.8 NMAC

7.

Variances:

Justifications and/or demonstrations that the proposed variance will afford reasonable protection against contamination of fresh water, human health, and the environment.

Check the below box only if a variance is requested:

☒ Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. If a Variance is requested, include the variance information on a separate page and attach it to the C-147 as part of the application.

If a Variance is requested, it must be approved prior to implementation.

8.

Siting Criteria for Recycling Containment

Instructions: The applicant must provide attachments that demonstrate compliance for each siting criteria below as part of the application. Potential examples of the siting attachment source material are provided below under each criteria.

General siting**Ground water is less than 50 feet below the bottom of the Recycling Containment.**

NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells

☐ Yes ☒ No
☐ NA

Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.

☐ Yes ☒ No
☐ NA

- Written confirmation or verification from the municipality; written approval obtained from the municipality

Within the area overlying a subsurface mine.

☐ Yes ☒ No

- Written confirmation or verification or map from the NM EMNRD-Mining and Minerals Division

Within an unstable area.

☐ Yes ☒ No

- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; topographic map

Within a 100-year floodplain. FEMA map

☐ Yes ☒ No

Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).

☐ Yes ☒ No

- Topographic map; visual inspection (certification) of the proposed site

Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.

☐ Yes ☒ No

- Visual inspection (certification) of the proposed site; aerial photo; satellite image

Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application.

☐ Yes ☒ No

- NM Office of the State Engineer - iWATERS database search; visual inspection (certification) of the proposed site

Within 500 feet of a wetland.

☐ Yes ☒ No

- US Fish and Wildlife Wetland Identification map; topographic map; visual inspection (certification) of the proposed site

9.

Recycling Facility and/or Containment Checklist:


Instructions: Each of the following items must be attached to the application. Indicate, by a check mark in the box, that the documents are attached.

- ☒ Design Plan - based upon the appropriate requirements.
- ☒ Operating and Maintenance Plan - based upon the appropriate requirements.
- ☒ Closure Plan - based upon the appropriate requirements.
- ☒ Site Specific Groundwater Data -
- ☒ Siting Criteria Compliance Demonstrations –
- ☒ Certify that notice of the C-147 (only) has been sent to the surface owner(s)

10.

Operator Application Certification:

I hereby certify that the information and attachments submitted with this application are true, accurate and complete to the best of my knowledge and belief.

Name (Print): Timsan Bricker Title: Environmental Coordinator
Signature:  Date: 8/23/2024
e-mail address: tbricker@selectwater.com Telephone: 575-200-7551

11.

OCD Representative Signature: _____ **Approval Date:** _____

Title: _____ **OCD Permit Number:** _____

- ☐ OCD Conditions _____
- ☐ Additional OCD Conditions on Attachment

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-147
Revised April 3, 2017

Recycling Facility and/or Recycling Containment

Type of Facility: ☒ Recycling Facility ☒ Recycling Containment*
Type of action: ☐ Permit ☐ Registration
☒ Modification ☐ Extension
☐ Closure ☐ Other (explain) _____

* At the time C-147 is submitted to the division for a Recycling Containment, a copy shall be provided to the surface owner.

Be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

1.
Operator: Select Water Solutions, LLC. (For multiple operators attach page with information) OGRID #: 289068
Address: 1820 North I-35, Gainesville, TX 76240
Facility or well name (include API# if associated with a well): Raptor Recycle Facility West Storage Pit
OCD Permit Number: 1RF-524 (For new facilities the permit number will be assigned by the district office)
U/L or Qtr/Qtr SE/4 Section 19 Township 18 South Range 34 East County: Lea
Surface Owner: ☐ Federal ☐ State ☒ Private ☐ Tribal Trust or Indian Allotment

2.
☐ **Recycling Facility:**
Location of recycling facility (if applicable): Latitude 32.728048° Longitude -103.599026° NAD83
Proposed Use: ☒ Drilling* ☒ Completion* ☒ Production* ☒ Plugging*
**The re-use of produced water may NOT be used until fresh water zones are cased and cemented*
☐ Other, *requires permit for other uses. Describe use, process, testing, volume of produced water and ensure there will be no adverse impact on groundwater or surface water.*
☒ Fluid Storage
☐ Above ground tanks ☒ Recycling containment ☐ Activity permitted under 19.15.17 NMAC explain type _____
☐ Activity permitted under 19.15.36 NMAC explain type: _____ ☐ Other explain _____
☐ For multiple or additional recycling containments, attach design and location information of each containment
☐ **Closure Report (required within 60 days of closure completion):** ☐ Recycling Facility Closure Completion Date: _____

3.
☒ **Recycling Containment:**
☐ Annual Extension after initial 5 years (attach summary of monthly leak detection inspections for previous year)
Center of Recycling Containment (if applicable): Latitude 32.729406° Longitude -103.595825° NAD83
☐ For multiple or additional recycling containments, attach design and location information of each containment
☒ Lined ☐ Liner type: Thickness 60/40 mil ☐ LLDPE ☒ HDPE ☐ PVC ☐ Other _____
☐ String-Reinforced
Liner Seams: ☒ Welded ☐ Factory ☐ Other _____ Volume: 994,275 bbl Dimensions: L835 x W490 x D24
☐ Recycling Containment Closure Completion Date: _____

4.

Bonding:

- ☐ Covered under bonding pursuant to 19.15.8 NMAC per 19.15.34.15(A)(2) NMAC (These containments are limited to only the wells owned or operated by the owners of the containment.)
- ☒ Bonding in accordance with 19.15.34.15(A)(1). Amount of bond \$4,987,010.58 (work on these facilities cannot commence until bonding amounts are approved)
- ☒ Attach closure cost estimate and documentation on how the closure cost was calculated.

5.

Fencing:

- ☐ Four foot height, four strands of barbed wire evenly spaced between one and four feet
- ☒ Alternate. Please specify 8-ft Tall Wire Mesh Game Fence

6.

Signs:

- ☒ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers
- ☐ Signed in compliance with 19.15.16.8 NMAC

7.

Variances:

Justifications and/or demonstrations that the proposed variance will afford reasonable protection against contamination of fresh water, human health, and the environment.

Check the below box only if a variance is requested:

☒ Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. If a Variance is requested, include the variance information on a separate page and attach it to the C-147 as part of the application.

If a Variance is requested, it must be approved prior to implementation.

8.

Siting Criteria for Recycling Containment

Instructions: The applicant must provide attachments that demonstrate compliance for each siting criteria below as part of the application. Potential examples of the siting attachment source material are provided below under each criteria.

General siting**Ground water is less than 50 feet below the bottom of the Recycling Containment.**

NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells

☐ Yes ☒ No
☐ NA

Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.

☐ Yes ☒ No
☐ NA

- Written confirmation or verification from the municipality; written approval obtained from the municipality

Within the area overlying a subsurface mine.

☐ Yes ☒ No

- Written confirmation or verification or map from the NM EMNRD-Mining and Minerals Division

Within an unstable area.

☐ Yes ☒ No

- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; topographic map

Within a 100-year floodplain. FEMA map

☐ Yes ☒ No

Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).

☐ Yes ☒ No

- Topographic map; visual inspection (certification) of the proposed site

Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.

☐ Yes ☒ No

- Visual inspection (certification) of the proposed site; aerial photo; satellite image

Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application.

☐ Yes ☒ No

- NM Office of the State Engineer - iWATERS database search; visual inspection (certification) of the proposed site

Within 500 feet of a wetland.

☐ Yes ☒ No

- US Fish and Wildlife Wetland Identification map; topographic map; visual inspection (certification) of the proposed site

9.

Recycling Facility and/or Containment Checklist:

Instructions: Each of the following items must be attached to the application. Indicate, by a check mark in the box, that the documents are attached.


- ☒ Design Plan - based upon the appropriate requirements.
- ☒ Operating and Maintenance Plan - based upon the appropriate requirements.
- ☒ Closure Plan - based upon the appropriate requirements.
- ☒ Site Specific Groundwater Data -
- ☒ Siting Criteria Compliance Demonstrations –
- ☒ Certify that notice of the C-147 (only) has been sent to the surface owner(s)

10.

Operator Application Certification:

I hereby certify that the information and attachments submitted with this application are true, accurate and complete to the best of my knowledge and belief.

Name (Print): Timsan Bricker Title: Environmental Coordinator

Signature:  Date: 8/23/2024

e-mail address: tbricker@selectwater.com Telephone: 575-200-7551

11.

OCD Representative Signature: _____ **Approval Date:** _____

Title: _____ **OCD Permit Number:** _____

☐ OCD Conditions _____

☐ Additional OCD Conditions on Attachment

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-147
Revised April 3, 2017

Recycling Facility and/or Recycling Containment

Type of Facility: ☒ Recycling Facility ☒ Recycling Containment*
Type of action: ☐ Permit ☐ Registration
☒ Modification ☐ Extension
☐ Closure ☐ Other (explain) _____

* At the time C-147 is submitted to the division for a Recycling Containment, a copy shall be provided to the surface owner.

Be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.

1.
Operator: Select Water Solutions, LLC. (For multiple operators attach page with information) OGRID #: 289068
Address: 1820 North I-35, Gainesville, TX 76240
Facility or well name (include API# if associated with a well): Raptor Recycle Facility West Treatment Pit
OCD Permit Number: 1RF-524 (For new facilities the permit number will be assigned by the district office)
U/L or Qtr/Qtr SE/4 Section 19 Township 18 South Range 34 East County: Lea
Surface Owner: ☐ Federal ☐ State ☒ Private ☐ Tribal Trust or Indian Allotment

2.
☐ **Recycling Facility:**
Location of recycling facility (if applicable): Latitude 32.728048° Longitude -103.599026° NAD83
Proposed Use: ☒ Drilling* ☒ Completion* ☒ Production* ☒ Plugging*
**The re-use of produced water may NOT be used until fresh water zones are cased and cemented*
☐ Other, *requires permit for other uses. Describe use, process, testing, volume of produced water and ensure there will be no adverse impact on groundwater or surface water.*
☒ Fluid Storage
☐ Above ground tanks ☒ Recycling containment ☐ Activity permitted under 19.15.17 NMAC explain type _____
☐ Activity permitted under 19.15.36 NMAC explain type: _____ ☐ Other explain _____
☐ For multiple or additional recycling containments, attach design and location information of each containment
☐ **Closure Report (required within 60 days of closure completion):** ☐ Recycling Facility Closure Completion Date: _____

3.
☒ **Recycling Containment:**
☐ Annual Extension after initial 5 years (attach summary of monthly leak detection inspections for previous year)
Center of Recycling Containment (if applicable): Latitude 32.728532° Longitude -103.595074° NAD83
☐ For multiple or additional recycling containments, attach design and location information of each containment
☒ Lined ☐ Liner type: Thickness 60/40 mil ☐ LLDPE ☒ HDPE ☐ PVC ☐ Other _____
☐ String-Reinforced
Liner Seams: ☒ Welded ☐ Factory ☐ Other _____ Volume: 50,413 bbl Dimensions: L200 x W200 x D19
☐ Recycling Containment Closure Completion Date: _____

4.

Bonding:

- ☐ Covered under bonding pursuant to 19.15.8 NMAC per 19.15.34.15(A)(2) NMAC (These containments are limited to only the wells owned or operated by the owners of the containment.)
- ☒ Bonding in accordance with 19.15.34.15(A)(1). Amount of bond \$4,987,010.58 (work on these facilities cannot commence until bonding amounts are approved)
- ☒ Attach closure cost estimate and documentation on how the closure cost was calculated.

5.

Fencing:

- ☐ Four foot height, four strands of barbed wire evenly spaced between one and four feet
- ☒ Alternate. Please specify 8-ft Tall Wire Mesh Game Fence

6.

Signs:

- ☒ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers
- ☐ Signed in compliance with 19.15.16.8 NMAC

7.

Variances:

Justifications and/or demonstrations that the proposed variance will afford reasonable protection against contamination of fresh water, human health, and the environment.

Check the below box only if a variance is requested:

☒ Variance(s): Requests must be submitted to the appropriate division district for consideration of approval. If a Variance is requested, include the variance information on a separate page and attach it to the C-147 as part of the application.

If a Variance is requested, it must be approved prior to implementation.

8.

Siting Criteria for Recycling Containment

Instructions: The applicant must provide attachments that demonstrate compliance for each siting criteria below as part of the application. Potential examples of the siting attachment source material are provided below under each criteria.

General siting**Ground water is less than 50 feet below the bottom of the Recycling Containment.**

NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells

☐ Yes ☒ No
☐ NA

Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.

☐ Yes ☒ No
☐ NA

- Written confirmation or verification from the municipality; written approval obtained from the municipality

Within the area overlying a subsurface mine.

☐ Yes ☒ No

- Written confirmation or verification or map from the NM EMNRD-Mining and Minerals Division

Within an unstable area.

☐ Yes ☒ No

- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; topographic map

Within a 100-year floodplain. FEMA map

☐ Yes ☒ No

Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse, or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).

☐ Yes ☒ No

- Topographic map; visual inspection (certification) of the proposed site

Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.

☐ Yes ☒ No

- Visual inspection (certification) of the proposed site; aerial photo; satellite image

Within 500 horizontal feet of a spring or a fresh water well used for domestic or stock watering purposes, in existence at the time of initial application.

☐ Yes ☒ No

- NM Office of the State Engineer - iWATERS database search; visual inspection (certification) of the proposed site

Within 500 feet of a wetland.

☐ Yes ☒ No

- US Fish and Wildlife Wetland Identification map; topographic map; visual inspection (certification) of the proposed site

9.

Recycling Facility and/or Containment Checklist:


Instructions: Each of the following items must be attached to the application. Indicate, by a check mark in the box, that the documents are attached.

- ☒ Design Plan - based upon the appropriate requirements.
- ☒ Operating and Maintenance Plan - based upon the appropriate requirements.
- ☒ Closure Plan - based upon the appropriate requirements.
- ☒ Site Specific Groundwater Data -
- ☒ Siting Criteria Compliance Demonstrations –
- ☒ Certify that notice of the C-147 (only) has been sent to the surface owner(s)

10.

Operator Application Certification:

I hereby certify that the information and attachments submitted with this application are true, accurate and complete to the best of my knowledge and belief.

Name (Print): Timsan Bricker Title: Environmental Coordinator
Signature:  Date: 8/23/2024
e-mail address: tbricker@selectwater.com Telephone: 575-200-7551

11.

OCD Representative Signature: _____ **Approval Date:** _____

Title: _____ **OCD Permit Number:** _____

- ☐ OCD Conditions _____
- ☐ Additional OCD Conditions on Attachment



C147 MODIFICATION SUBMITTAL
RAPTOR RECYCLE FACILITY
SECTION 19, TOWNSHIP 18 SOUTH, RANGE 34 EAST
LEA COUNTY, NEW MEXICO
024251-00

APPENDIX B

VARIANCE REQUESTS



August 13, 2024

Ms. Victoria Venegas
New Mexico EMNRD
Oil Conservation Division

RE: Rule 34 Variance Request –Produced Water Recycling Containment

Ms. Venegas:

Select Water Solutions, LLC. is requesting a variance to Rule 34 Part 12(A)(3) requiring "The edges of all liners shall be anchored in the bottom of a compacted earth-filled trench."


Select is requesting approval to use an Above Ground Storage Tank (AST) as containment structures at the Select Raptor Recycle Facility. Based on our experience AST's work well for this purpose, they are structurally sound and easy to maintain. Clips will be used at the top of the steel walls to secure the liner. These clips are specifically designed to hold the AST liner in place and provide the same type of liner security as an anchor trench. It should also be noted that this variance has been granted on past sites.

Should you have any questions or require additional information, please contact me by phone at 580-234-8780 or by email at mratke@envirotechconsulting.com at your convenience.

Thank you for your consideration.
Best regards,

Envirotech Engineering & Consulting, Inc.

Mitchell Ratke, P.E.
Senior Project Engineer, Energy Infrastructure



8-13-2024



August 13, 2024

Ms. Victoria Venegas
New Mexico EMNRD
Oil Conservation Division

RE: Rule 34 Variance Request –Produced Water Recycling Containment

Ms. Venegas:

Select Water Solutions, LLC. is requesting a variance to Rule 34 Part 12(A)(2) requiring "...The levee shall have an outside grade no steeper than three horizontal feet to one vertical foot (3H:1V)."

Select is requesting approval to use an Above Ground Storage Tank (AST) as a containment structure at the Select Raptor Recycle Facility. Based on our experience an AST works well for this purpose, they are structurally sound and easy to maintain. This AST will have vertical walls on both interior and exterior sides and thus requires a variance for use. The AST will, however, be double lined like other containments to limit the risk of leakage. It should also be noted that this variance has been granted on past sites.

Should you have any questions or require additional information, please contact me by phone at 580-234-8780 or by email at mratke@envirotechconsulting.com at your convenience.

Thank you for your consideration.
Best regards,

Envirotech Engineering & Consulting, Inc.

Mitchell Ratke, P.E.
Senior Project Engineer, Energy Infrastructure





August 13, 2024

Ms. Victoria Venegas
New Mexico EMNRD
Oil Conservation Division

RE: Rule 34 Variance Request –Produced Water Recycling Containment

Ms. Venegas:

Select Water Solutions, LLC. is requesting a variance to Rule 34 Part 12(A)(2) requiring "... The operator shall construct the containment in a levee with an inside grade no steeper than two horizontal feet to one vertical foot (2H:1V)."

Select is requesting approval to use an Above Ground Storage Tank (AST) as a containment structure at the Select Raptor Recycle Facility. Based on our experience an AST works well for this purpose, they are structurally sound and easy to maintain. This AST will have vertical walls on both interior and exterior sides and thus requires a variance for use. The AST will, however, be double lined like other containments to limit the risk of leakage. It should also be noted that this variance has been granted on past sites.

Should you have any questions or require additional information, please contact me by phone at 580-234-8780 or by email at mratke@envirotechconsulting.com at your convenience.

Thank you for your consideration.
Best regards,

Envirotech Engineering & Consulting, Inc.

Mitchell Ratke, P.E.
Senior Project Engineer, Energy Infrastructure



8-13-2024



August 13, 2024

Ms. Victoria Venegas
New Mexico EMNRD
Oil Conservation Division

RE: Rule 34 Variance Request –Produced Water Recycling Containment Primary Liner

Ms. Venegas:

Select Water Solutions, LLC. is requesting a variance to Rule 34 Part 12(A)(4) requiring primary liners to be 45-mil string reinforced LLDPE. Select is requesting approval to use 40-mil LLDPE in place of the specified material in an above ground storage tank (AST). Based on our experience, we feel that the requested material will allow us to provide equal environmental protection in our impoundments.

Due to the construction of the 45-mil reinforced LLDPE material, nondestructive QA/QC testing cannot be performed. The proposed 40-mil LLDPE will be seamed in a manner that will allow nondestructive pressure testing of the seams to ensure proper sealing.

The proposed LLDPE is appropriate material for the proposed use in the impoundment and is compatible with the material that will be stored. This material will provide equal or better environmental protection as the specified 45-mil reinforced LLDPE.

The proposed new liner system for the AST cross-section is as follows: prepare subgrade, 10 oz. geotextile, 40-mil LLDPE, 200 mil geonet, 40-mil LLDPE. This will replace the cross-section required by the current rule. It should also be noted that this variance has been granted on past sites.

Should you have any questions or require additional information, please contact me by phone at 580-234-8780 or by email at mratke@envirotechconsulting.com at your convenience.

Thank you for your consideration.
Best regards,

Envirotech Engineering & Consulting, Inc.

Mitchell Ratke, P.E.
Senior Project Engineer, Energy Infrastructure





August 13, 2024

Ms. Victoria Venegas
New Mexico EMNRD
Oil Conservation Division

RE: Rule 34 Variance Request –Produced Water Recycling Containment Secondary Liner

Ms. Venegas:

Select Water Solutions, LLC. is requesting a variance to Rule 34 Part 12(A)(4) requiring secondary liners to be 30-mil string reinforced LLDPE. Select is requesting approval to use 40-mil LLDPE Liner in the proposed AST. Based on our experience, we feel that the requested material will allow us to provide equal environmental protection in our impoundments.

Due to the construction of the 30-mil reinforced LLDPE material, nondestructive QA/QC testing cannot be performed. The proposed 40-mil LLDPE will be seamed in a manner that will allow nondestructive pressure testing of the seams to ensure proper sealing.

The proposed LLDPE is appropriate material for the proposed use in the impoundment and is compatible with the material that will be stored. This material will provide equal or better environmental protection as the specified 30-mil reinforced LLDPE.

The proposed new liner system cross-section for the AST is as follows: prepared subgrade, 10 oz. geotextile, 40-mil LLDPE, 200-mil geonet, 40-mil LLDPE. This will replace the cross-section required by the current rule. It should also be noted that this variance has been granted on past sites.

Should you have any questions or require additional information, please contact me by phone at 580-234-8780 or by email at mratke@envirotechconsulting.com at your convenience.

Thank you for your consideration.
Best regards,

Envirotech Engineering & Consulting, Inc.

Mitchell Ratke, P.E.
Senior Project Engineer, Energy Infrastructure






C147 MODIFICATION SUBMITTAL
RAPTOR RECYCLE FACILITY
SECTION 19, TOWNSHIP 18 SOUTH, RANGE 34 EAST
LEA COUNTY, NEW MEXICO
024251-00


APPENDIX C

AST SCHEMATIC

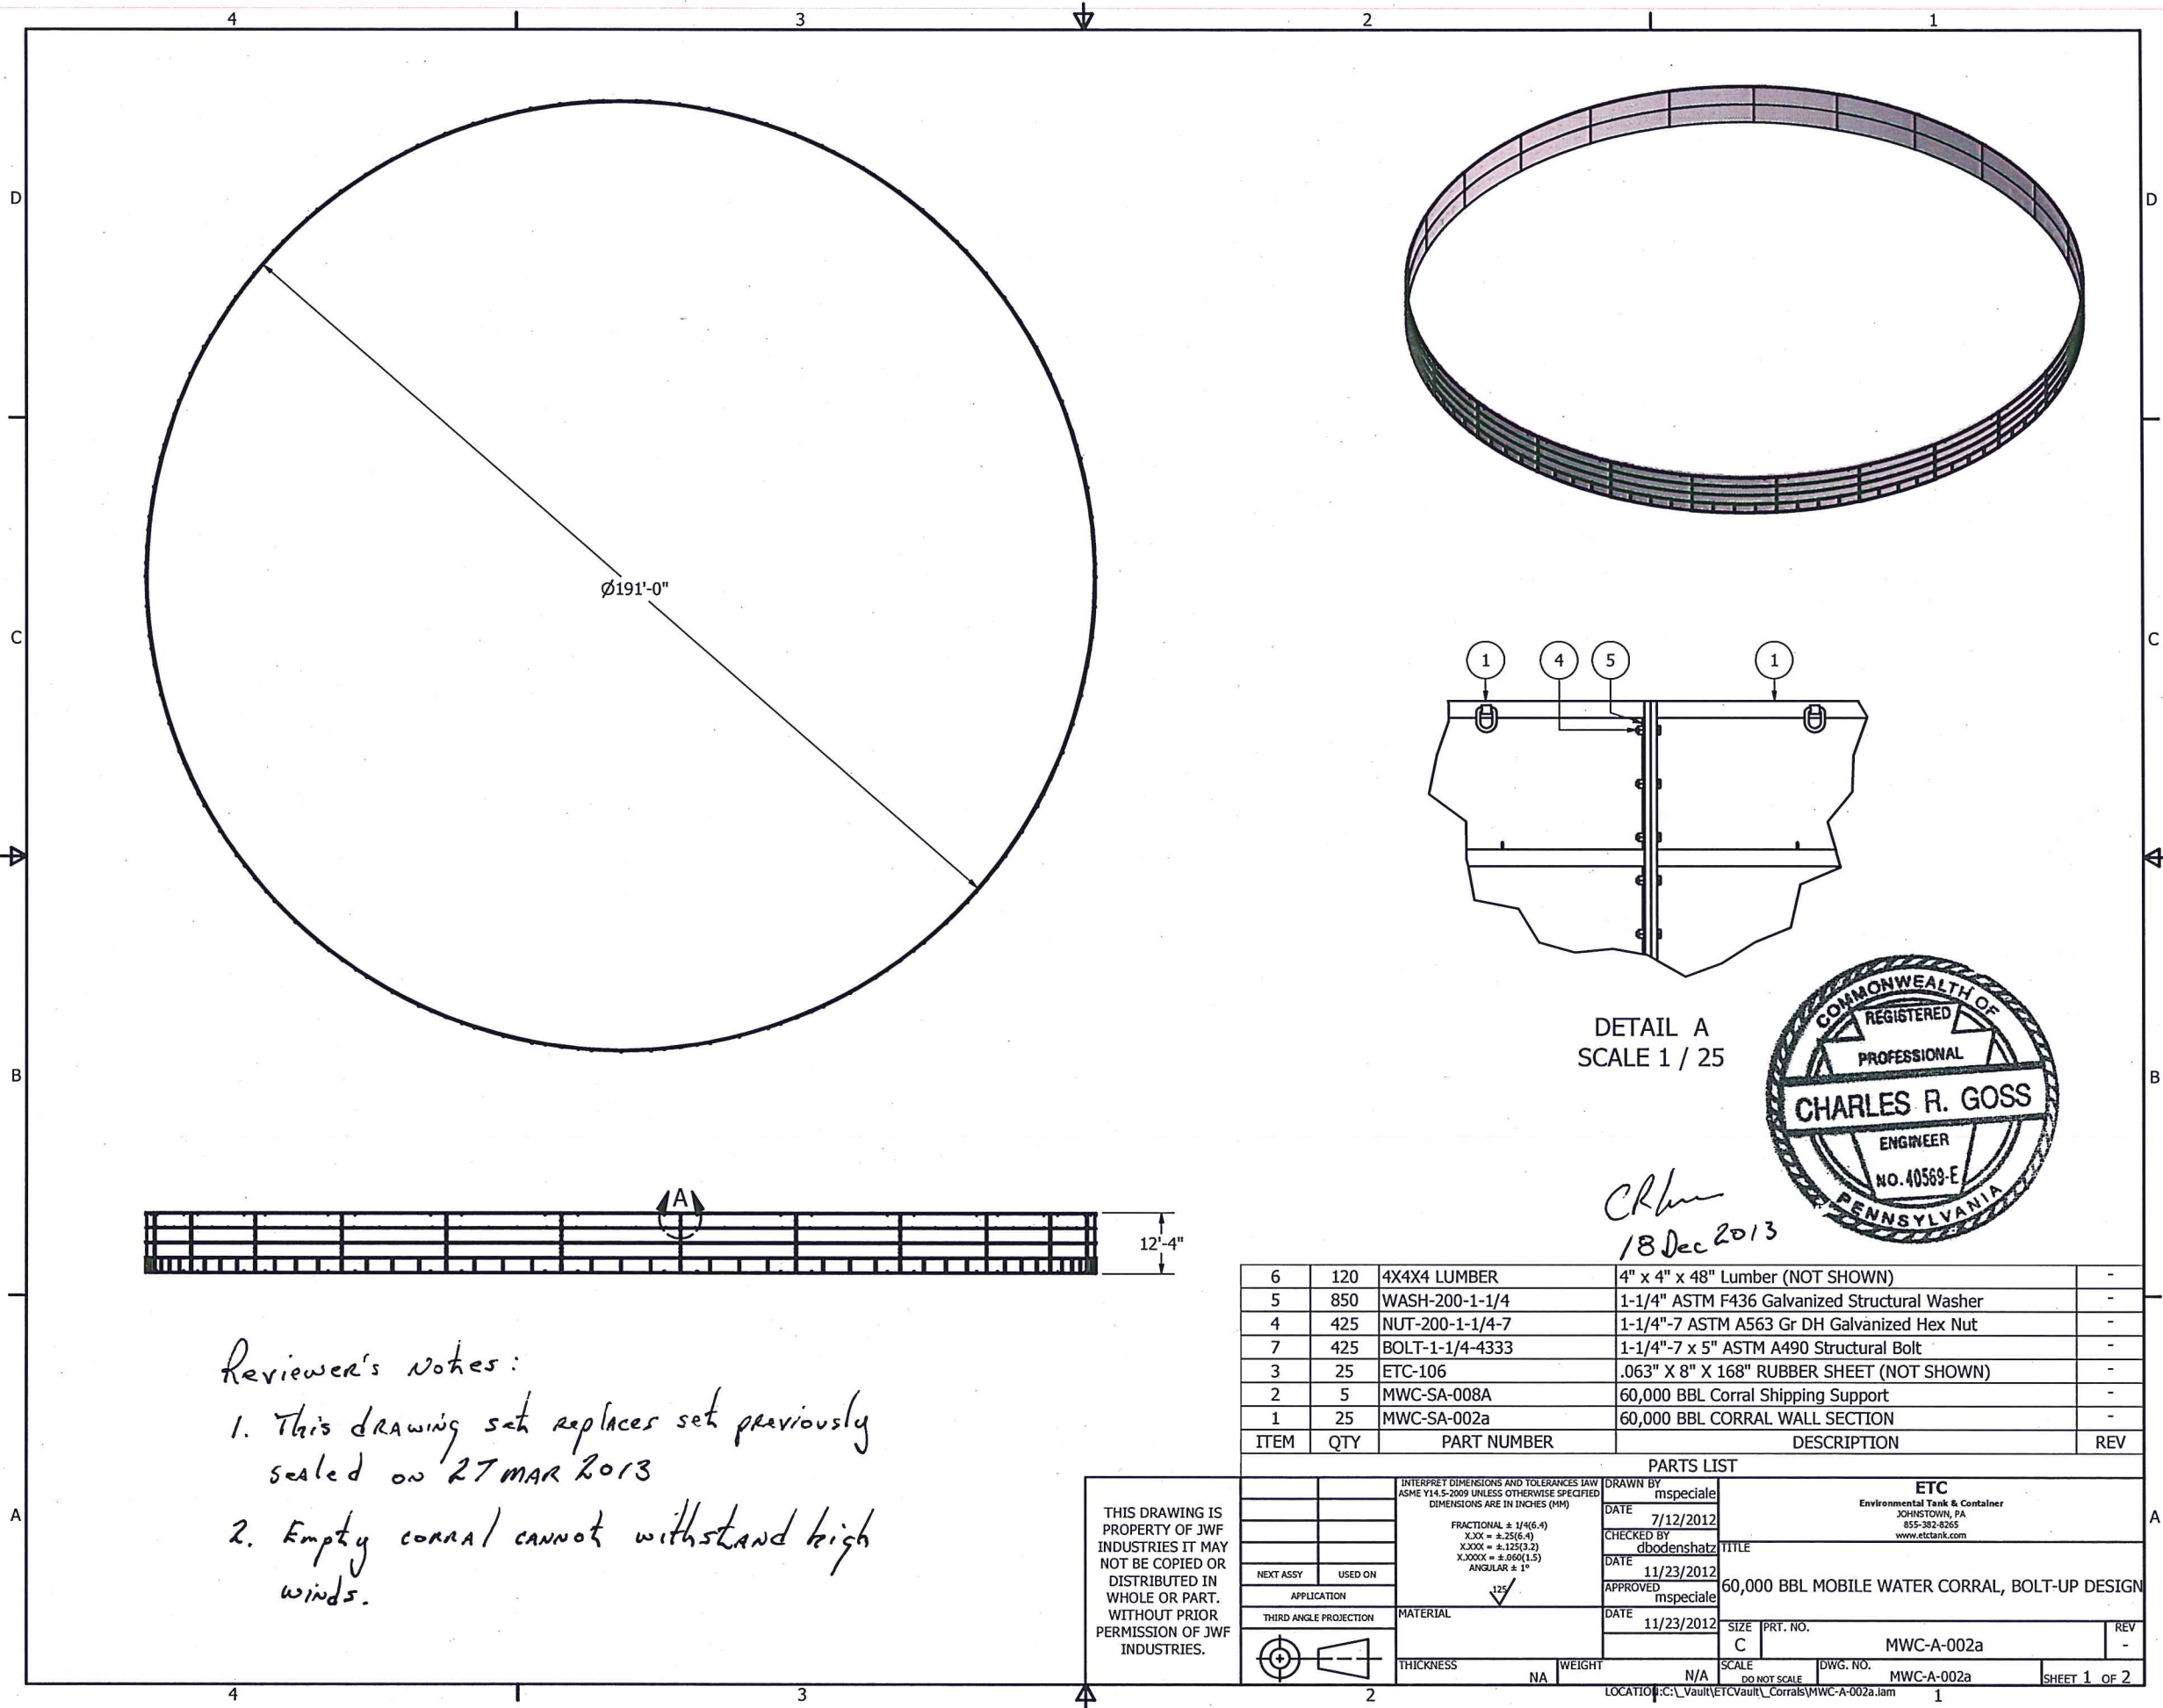

NOTES:

1. MINIMUM OF 30 FEET OF WORK AREA AROUND CORRAL
2. OVER ALL SITE MUST BE LEVEL TO +/- .50 INCH
3. RING AREA WHERE CORRAL PANELS WILL BE SETUP MUST BE LEVEL TO +/- .25 INCH
4. SOIL COMPACTION MUST MEET ASTM D-698A, 90% OR GREATER
5. BUILD A 12" X 12" SAND INSIDE CORNER RELIEF BEFORE INSTALLING LINER
6. MUST USE 1"-1/4"-7 X 4" GRADE A490 STRUCTURAL BOLTS
7. PANELS MUST HAVE ALL CONNECTING BOLTS TIGHTENED AND LINER FULLY SECURED BEFORE ADDING WATER
8. ALLOW FOR 6 INCHES OF FREEBOARD FROM TOP OF CORRAL


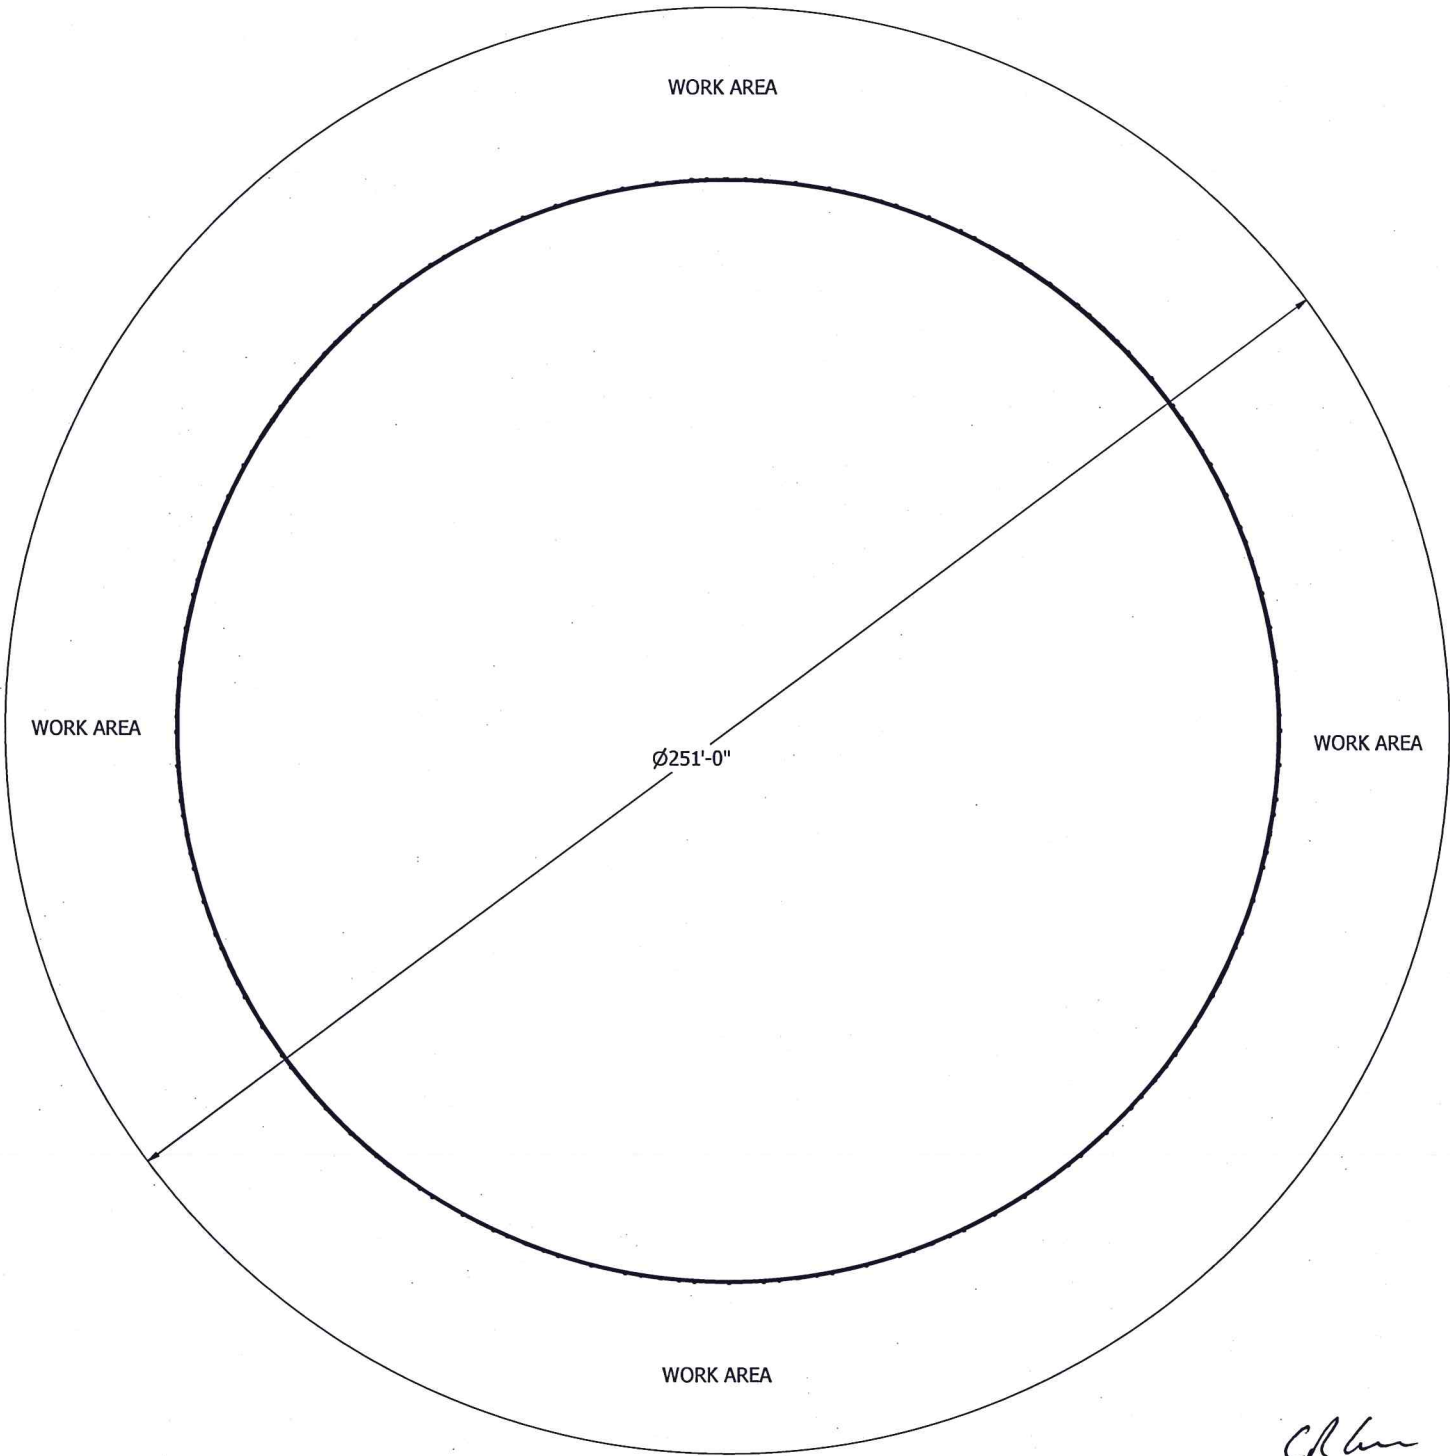


CRG
18 Dec 2013



THIS DRAWING IS PROPERTY OF JWF INDUSTRIES IT MAY NOT BE COPIED OR DISTRIBUTED IN WHOLE OR PART. WITHOUT PRIOR PERMISSION OF JWF INDUSTRIES.		INTERPRET DIMENSIONS AND TOLERANCES IN INCHES (MM)		DRAWN BY mspecial		ETC Environmental Tank & Container JOHNSTOWN, PA 855-382-6265 www.etc-tank.com	
		FRACTIONAL ± 1/4(6.4) XXX ± .25(6.4) XXXX ± .125(3.2) XXXXX ± .060(1.5) ANGULAR ± 1°		DATE 7/12/2012		TITLE	
		NEXT ASSY. USED ON		CHECKED BY dbodenshatz		DATE 11/23/2012	
		APPLICATION		APPROVED mspecial		DATE 11/23/2012	
THIRD ANGLE PROJECTION		MATERIAL		DATE 11/23/2012		SIZE C	
THICKNESS NA		WEIGHT N/A		SCALE DO NOT SCALE		DWG. NO. MWC-A-002a	
				LOCATION C:\Vault\ETC\Vault\Corrals\MWC-A-002a.lam		SHEET 2 OF 2	

NOTES:

1. BLAST TO A 1 1/2 - 2 mil PROFILE
2. PAINT WITH CARBOLINE 8845, 3 - 5 mils THICK

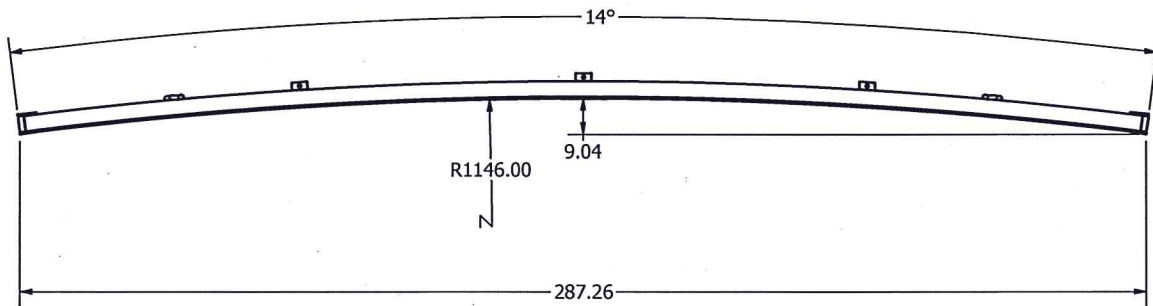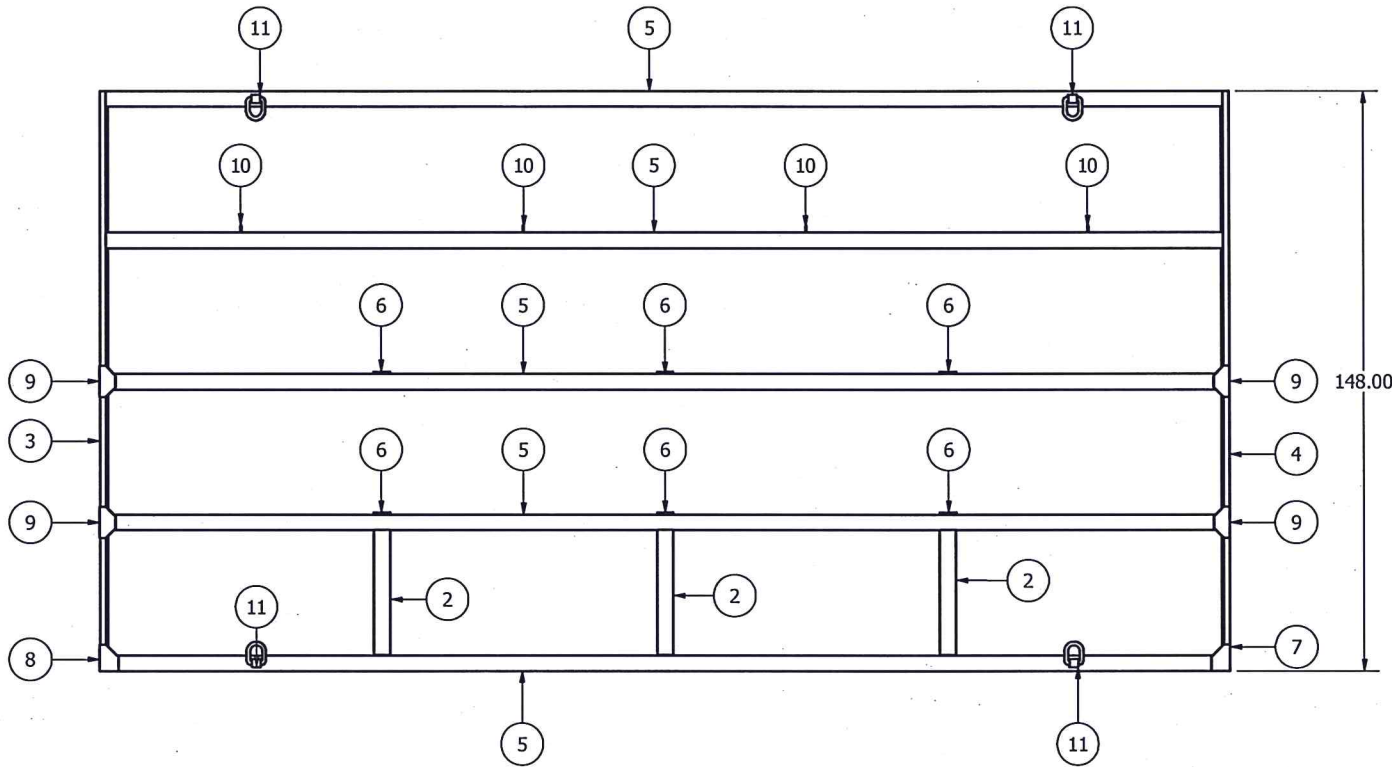


REVISION HISTORY				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	-	INITIAL RELEASE	10/1/2012	MJS

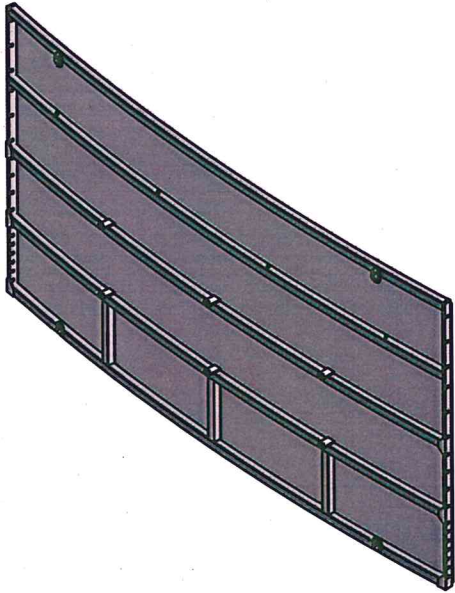

CRH
18 Dec 2013

12	1	ETC-109	.062" X 4" X 288" RUBBER SHEET	-	NA	NA
11	4	ETC-079	Weld-on Lifting Ring	-	NA	NA
10	4	ETC-040	D-RING	-	NA	NA
9	4	MWC-323	PLATE, 1/2"	-		1
8	1	MWC-322	PLATE, 1/2"	-		1
7	1	MWC-321	PLATE, 1/2"	-		1
6	6	MWC-019	PLATE, 1/2"	-	010558	23.43 lbs
5	5	MWC-017a	TUBE, 4" X 4" X .25"	-	030227	120 ft
4	1	MWC-211R	1.50" X 4.00" FLAT BAR	-	020172	12.33 ft
3	1	MWC-211L	1.50" X 4.00" FLAT BAR	-	020172	12.33 ft
2	3	MWC-004	TUBE, 4" X 4" X .25"	-	030068	8 ft
1	2	MWC-001a	PLATE	-	010013	5880.72 lbs
ITEM	QTY	PART NUMBER	DESCRIPTION	REV	STOCK NUM	UNIT QTY

THIS DRAWING IS PROPERTY OF JWF INDUSTRIES IT MAY NOT BE COPIED OR DISTRIBUTED IN WHOLE OR PART. WITHOUT PRIOR PERMISSION OF JWF INDUSTRIES.		INTERPRET DIMENSIONS AND TOLERANCES TO: ASME Y14.5-2009 UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES (MM)		DRAWN BY mspecialie		ETC Environmental Tank & Container JOHNS TOWN, PA 855-382-8265 www.etc-tank.com	
		FRACTIONAL ± 1/4(6.4) X.XX ± .25(6.4) X.XXX ± .125(3.2) X.XXXX ± .060(1.5) ANGULAR ± 1°		DATE 4/11/2012		TITLE 60,000 BBL CORRAL WALL SECTION	
		CHECKED BY dbodenshatz		DATE 8/31/2012		SIZE PRT. NO.	
		APPROVED mspecialie		DATE 8/31/2012		SCALE C	
NEXT ASSY		USED ON		MATERIAL Welded Steel Mild		DWG. NO. MWC-SA-002a	
APPLICATION		THIRD ANGLE PROJECTION		THICKNESS NA		WEIGHT N/A	
				LOCATION C:\Vault\ETCVault\Corrals\MWC-SA-002a.lam		SHEET 1 OF 2	

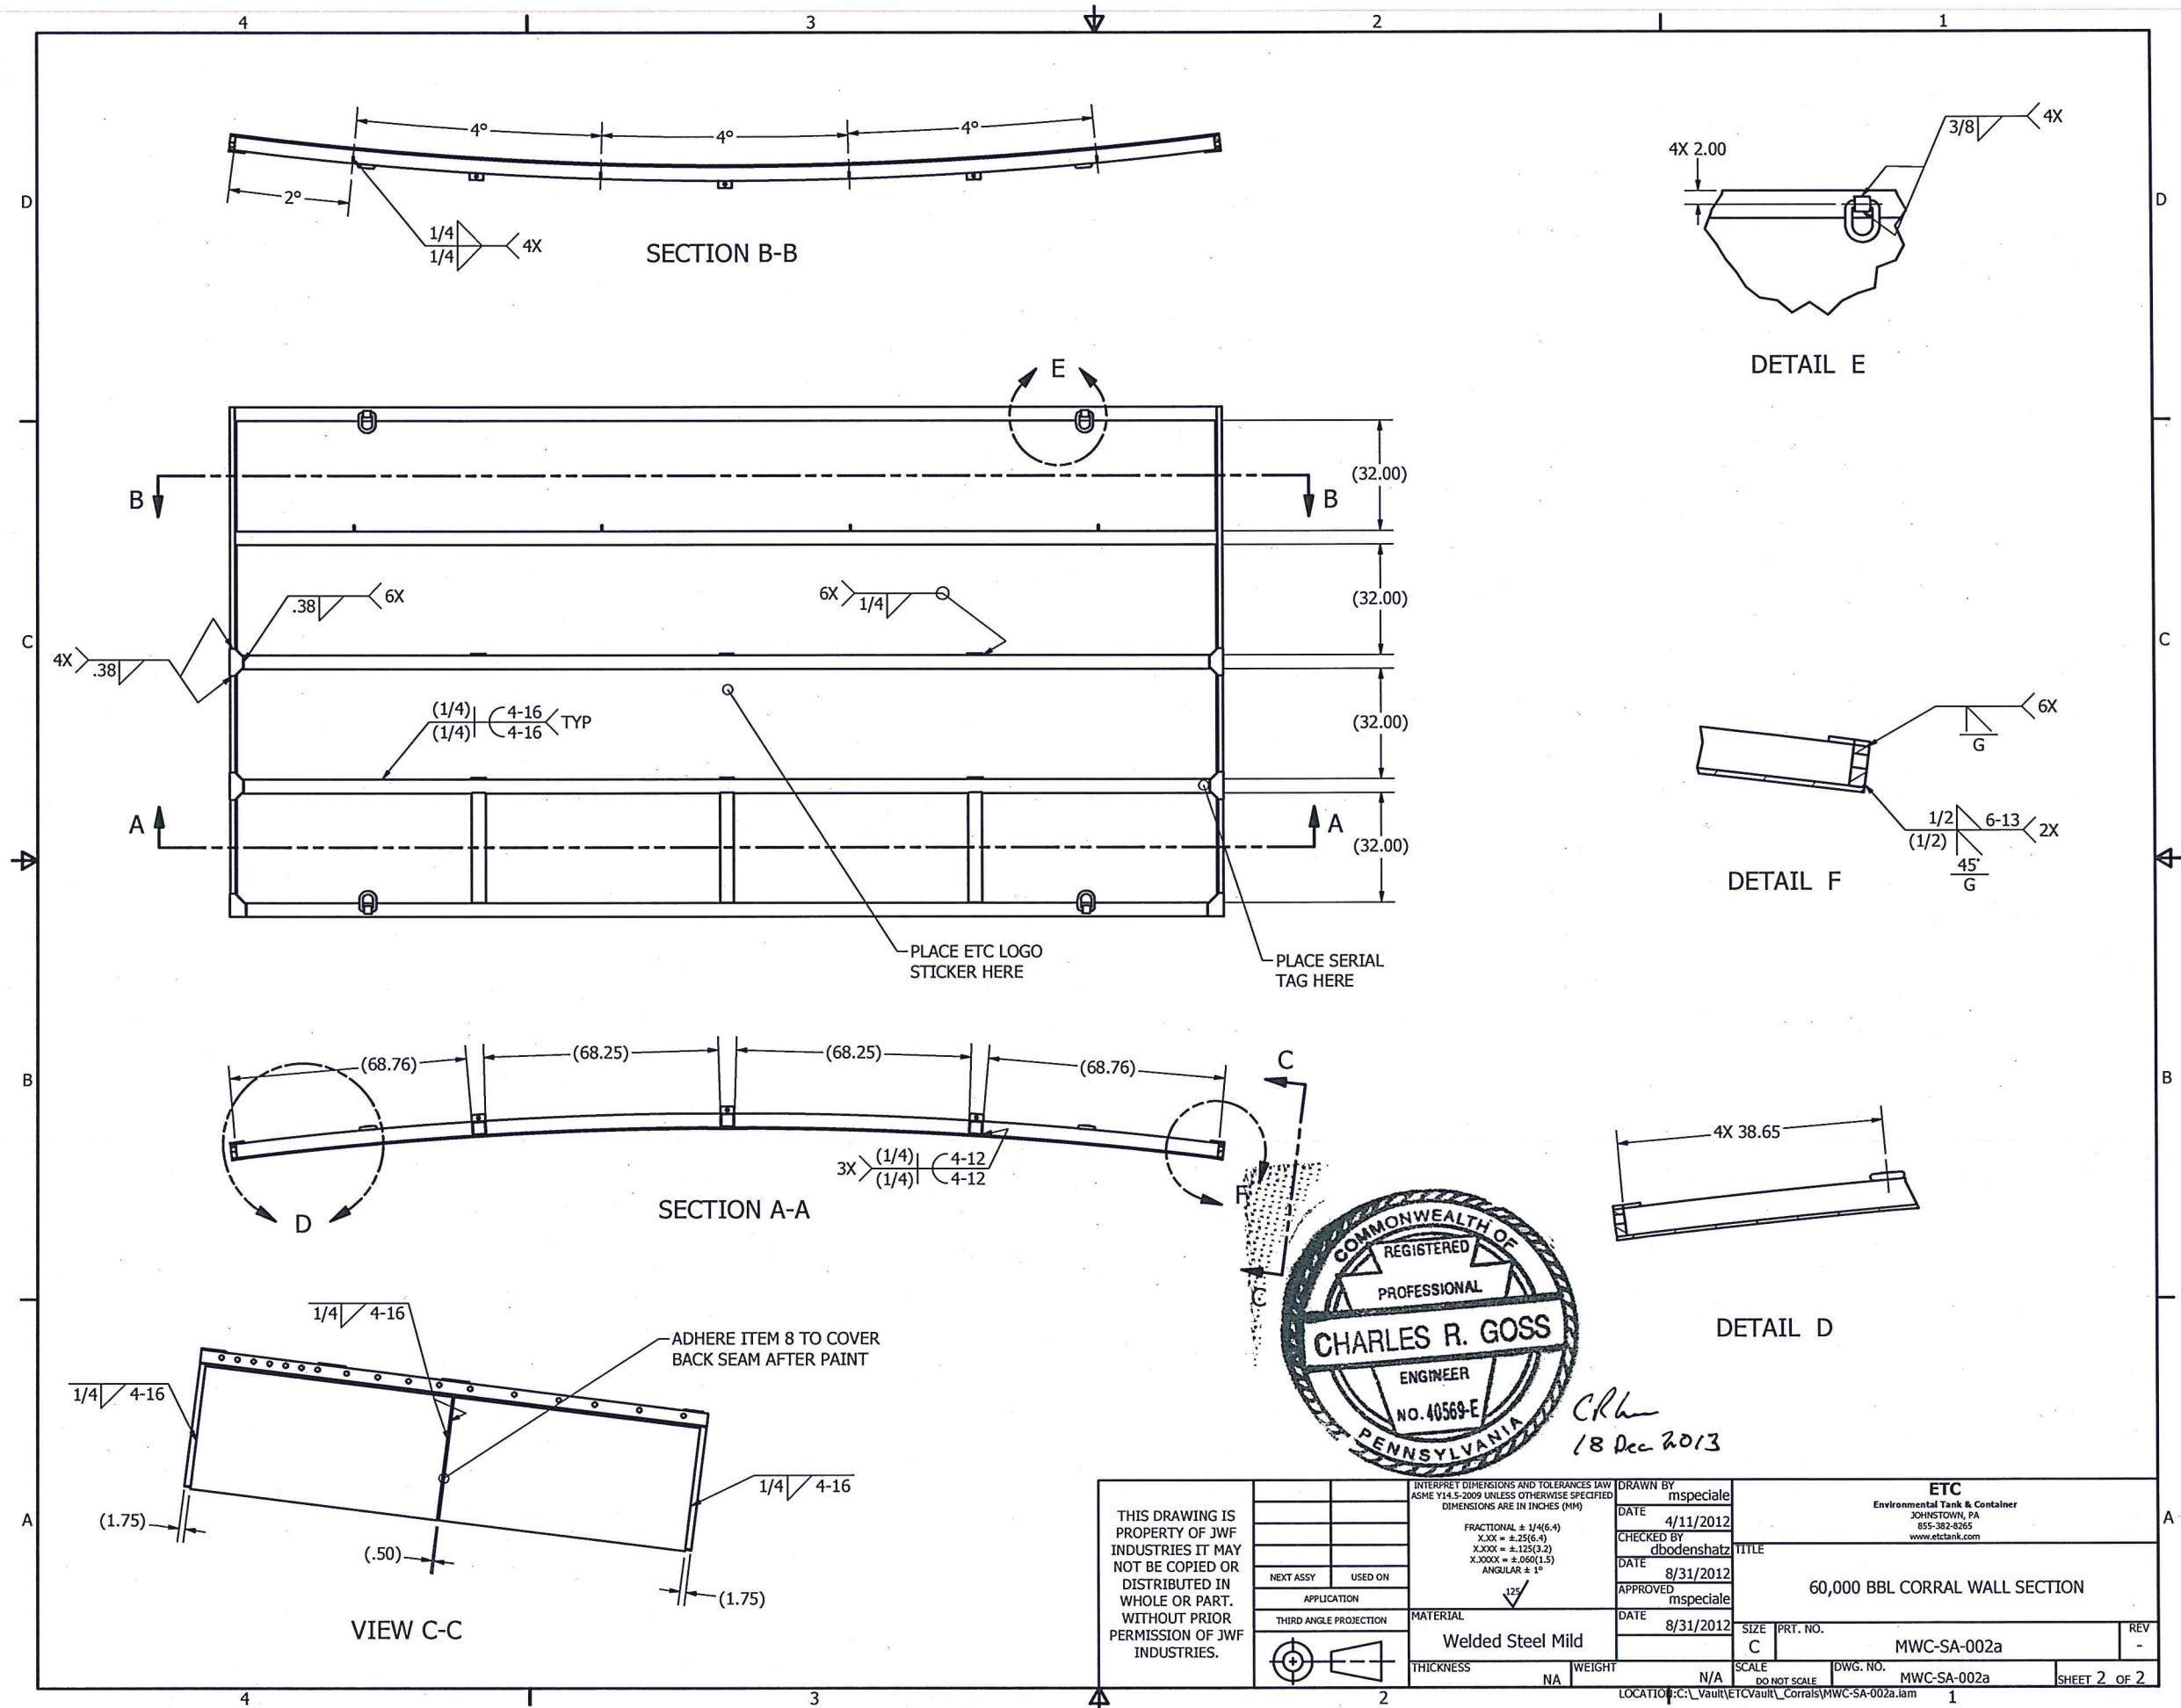




C147 MODIFICATION SUBMITTAL
RAPTOR RECYCLE FACILITY
SECTION 19, TOWNSHIP 18 SOUTH, RANGE 34 EAST
LEA COUNTY, NEW MEXICO
024251-00

APPENDIX D

AST LEAK DETECTION PLAN

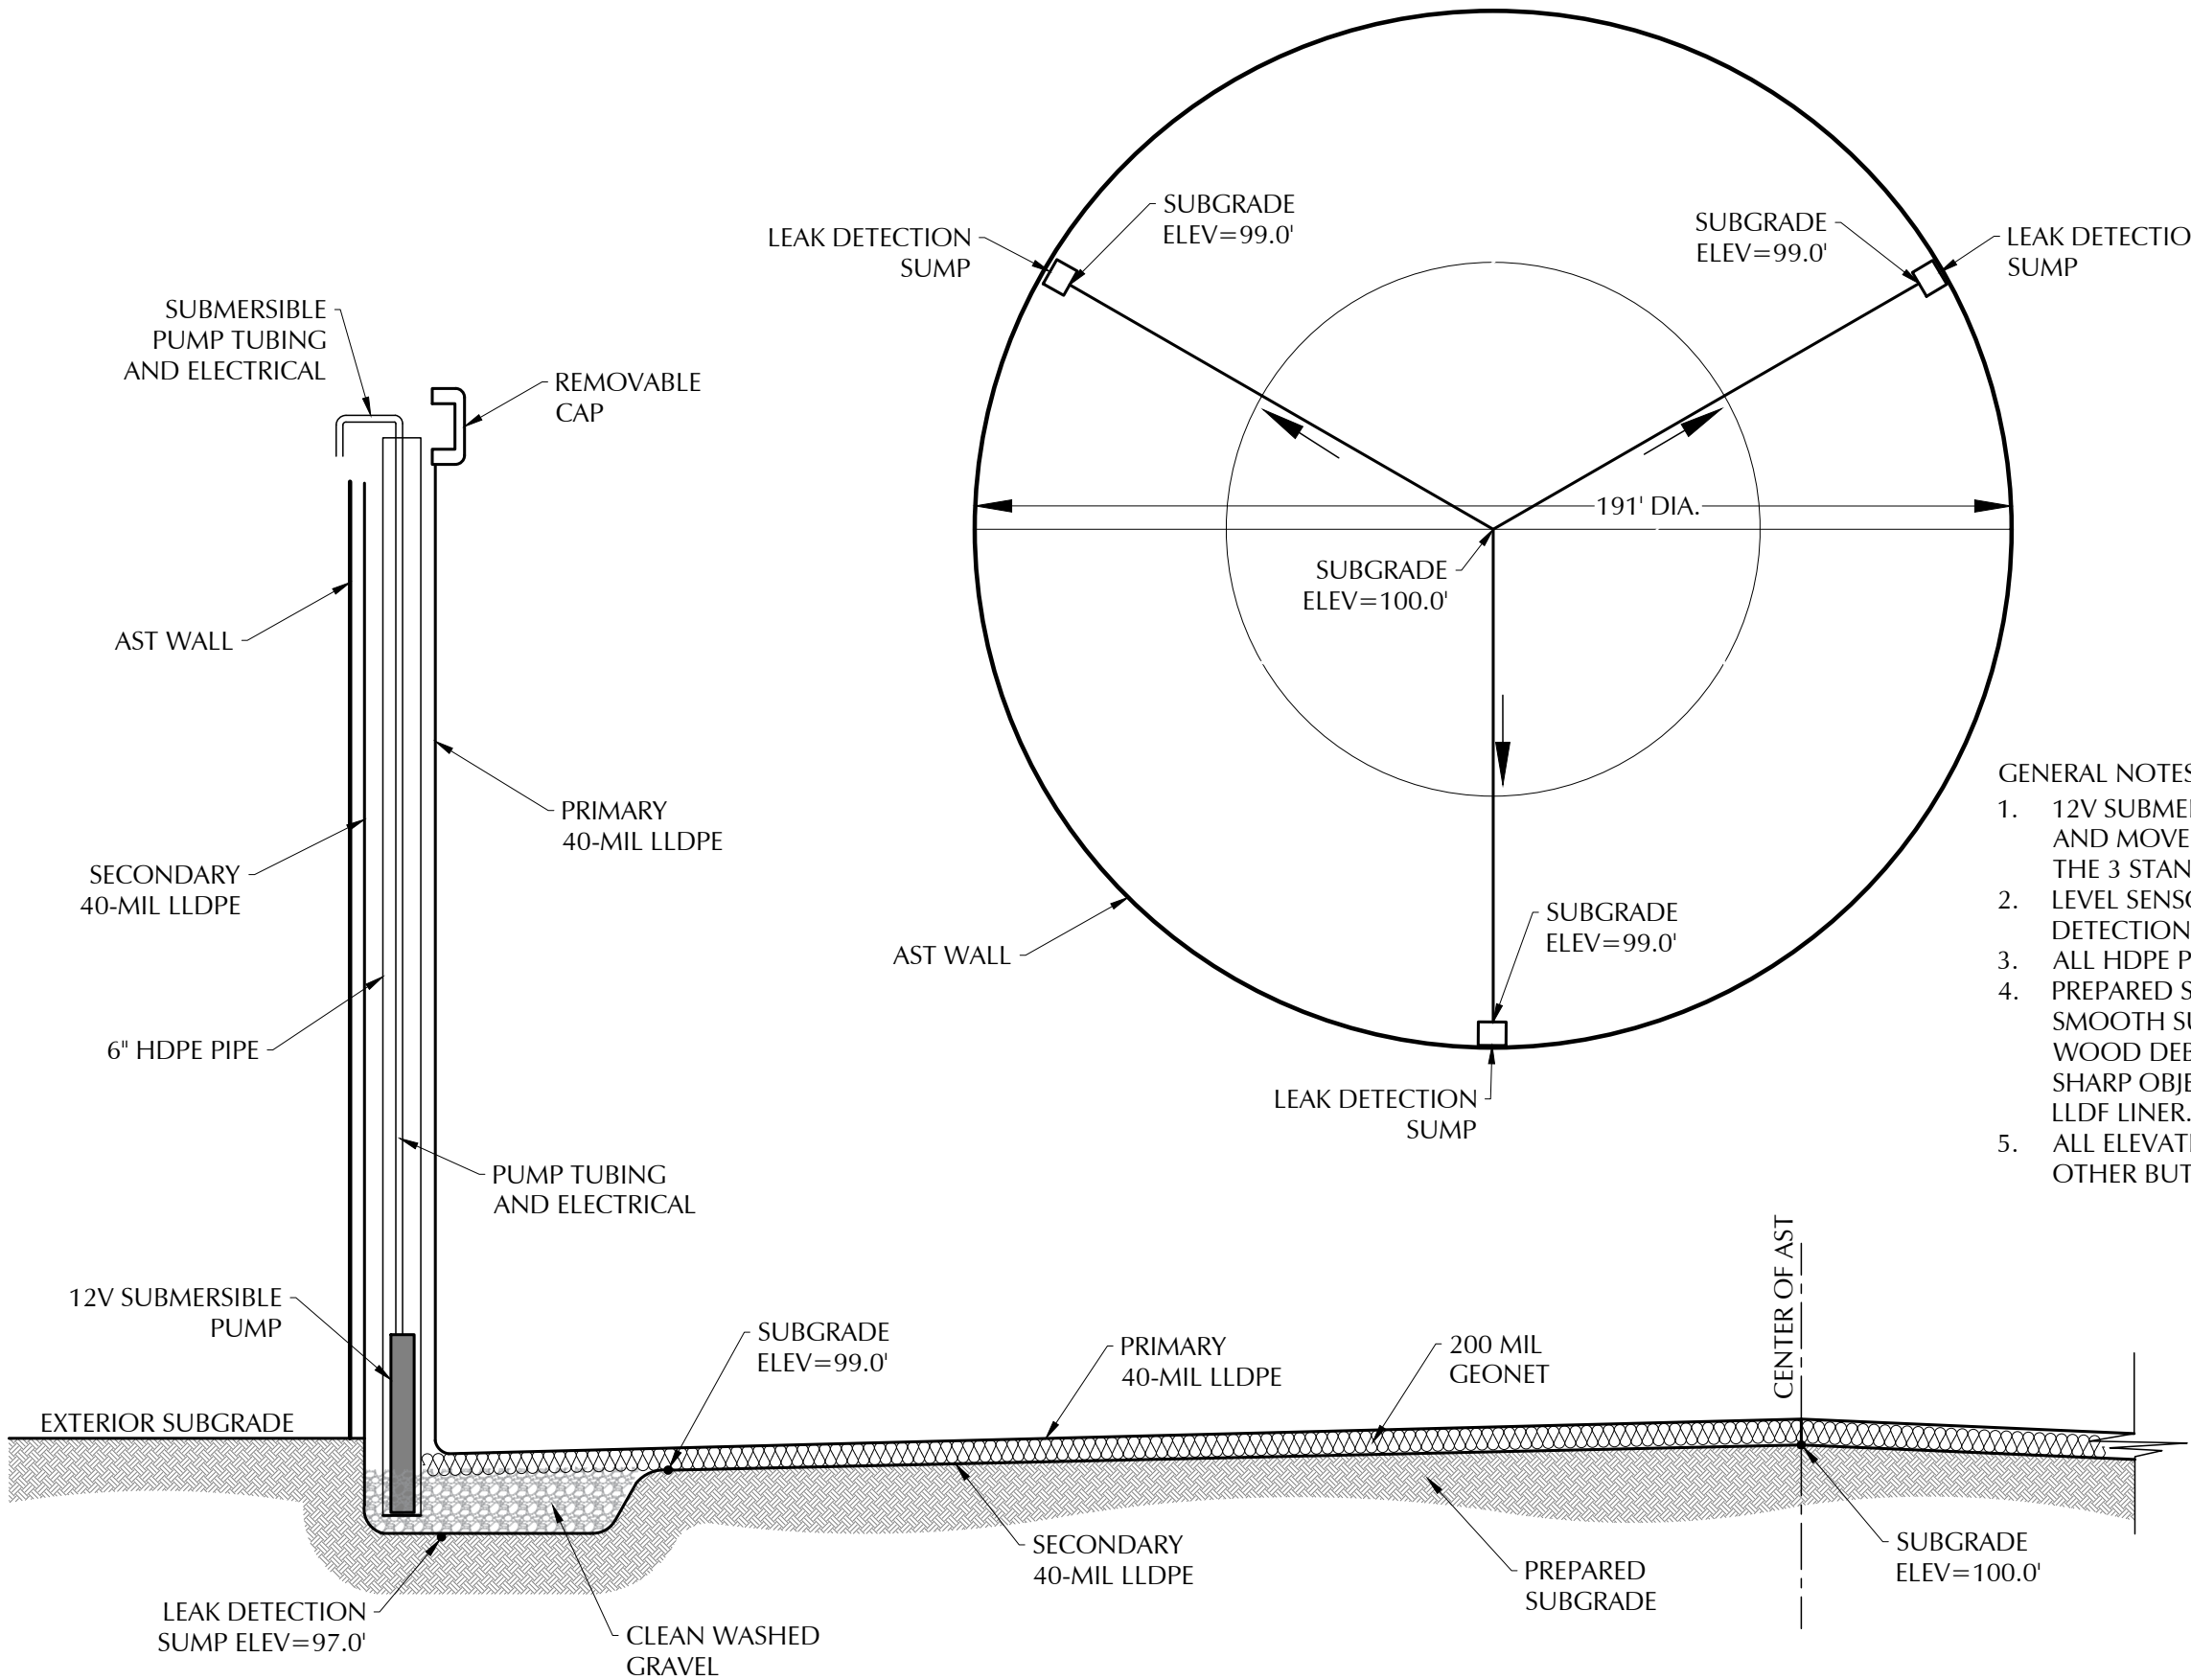

- GENERAL NOTES:
1. 12V SUBMERSIBLE PUMP SHALL BE MOBILE AND MOVED AS NEEDED BETWEEN EACH OF THE 3 STANDPIPES AS NEEDED.
 2. LEVEL SENSOR PROBE IN 1 OF 3 LEAK DETECTION PIPES.
 3. ALL HDPE PIPING SHALL BE SDR 17.
 4. PREPARED SUBGRADE MEANS COMPACTED SMOOTH SUBGRADE FREE OF ROCK, ROOTS, WOOD DEBRIS, CONCRETE RUBBLE AND ANY SHARP OBJECTS THAT MIGHT PUNCTURE THE LLDPE LINER.
 5. ALL ELEVATIONS SHALL ARE RELATIVE TO EACH OTHER BUT ARBITRARY IN NATURE.



ENVIROTECH
ENGINEERING
2500 North Eleventh Street
Enid, Oklahoma
580.234.8780
envirotechconsulting.com
PE #29736 - Expiration Date: 12-31-2024

COPYRIGHT
This document and the information contained may NOT be reproduced or excerpted from without the express written permission of Envirotech Engineering and Consulting, Inc. Unauthorized copying, disclosure or construction use are prohibited by the copyright law.

NO.	DATE	DESCRIPTION



AST LEAK DETECTION PLAN
RAPTOR RECYCLE FACILITY
SELECT WATER SOLUTIONS, LLC.
SECTION 19, TOWNSHIP 18 SOUTH, RANGE 34 EAST,
LEA COUNTY, NEW MEXICO

DATE:	AUGUST 2024
SCALE:	NOT TO SCALE
DESIGNED BY:	R. MOHAN
DRAWN BY:	R. MOHAN
CHECKED BY:	M. RATKE
PROJECT NO.	024251-00
SHEET NO.	1 OF 1

Released to: Imaging: 8/28/2024 1:20:28 PM




C147 MODIFICATION SUBMITTAL
RAPTOR RECYCLE FACILITY
SECTION 19, TOWNSHIP 18 SOUTH, RANGE 34 EAST
LEA COUNTY, NEW MEXICO
024251-00



APPENDIX E

AS-BUILT SUMP DETAILS


LEAK DETECTION PIPE TO
EXTEND FULL LENGTH OF
FLOOR (APPROX. 88-LF FOR
NORTH, EAST, AND WEST
STORAGE PITS, AND 24 -LF FOR
EAST AND WEST TREATMENT PITS)

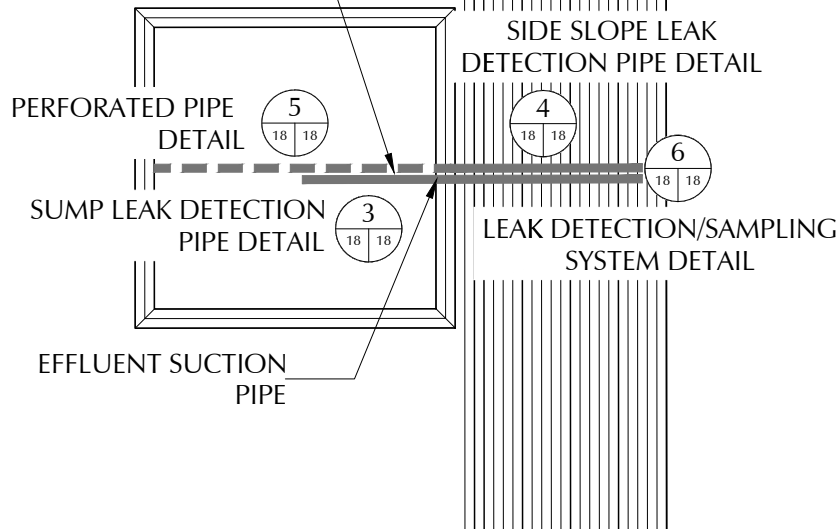


TYPICAL SUMP OVERVIEW DETAIL (2)
NOT TO SCALE

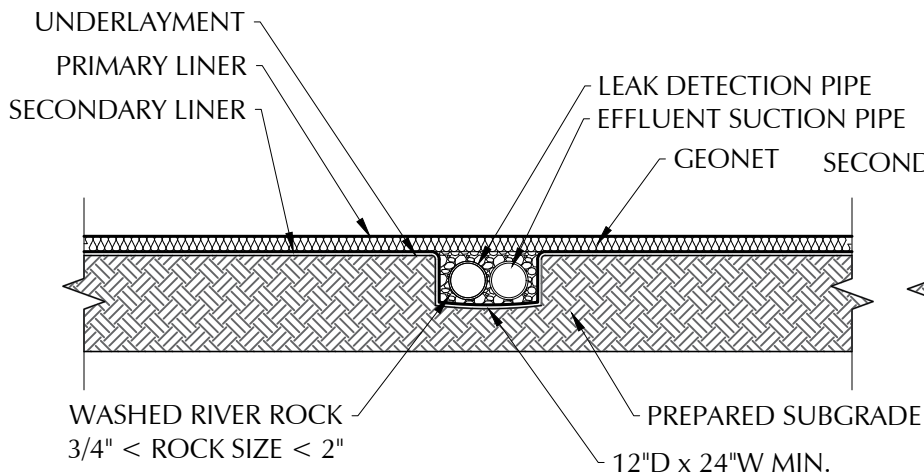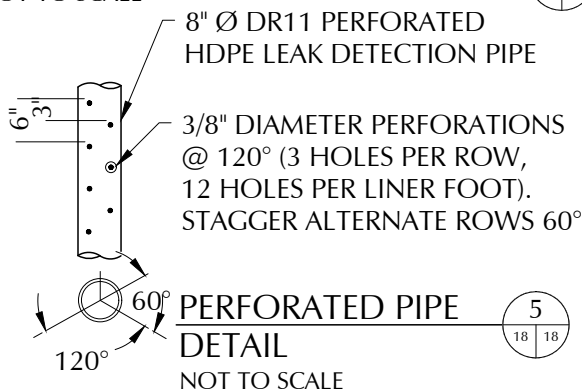


SUMP LEAK DETECTION PIPE DETAIL (3)
NOT TO SCALE

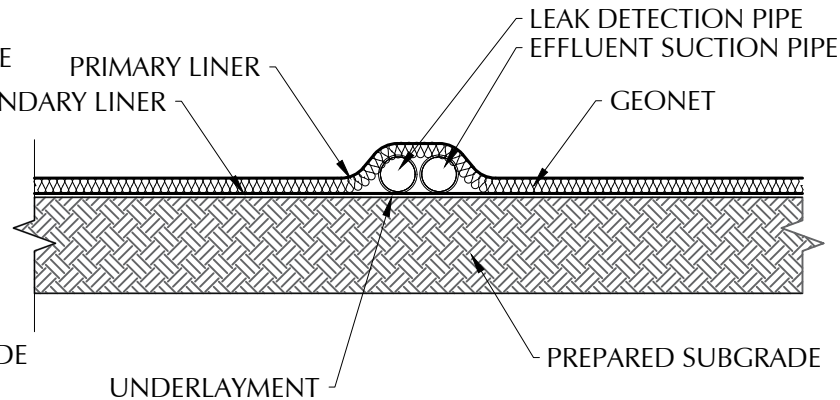

SIDE SLOPE LEAK DETECTION PIPE DETAIL (4)
NOT TO SCALE

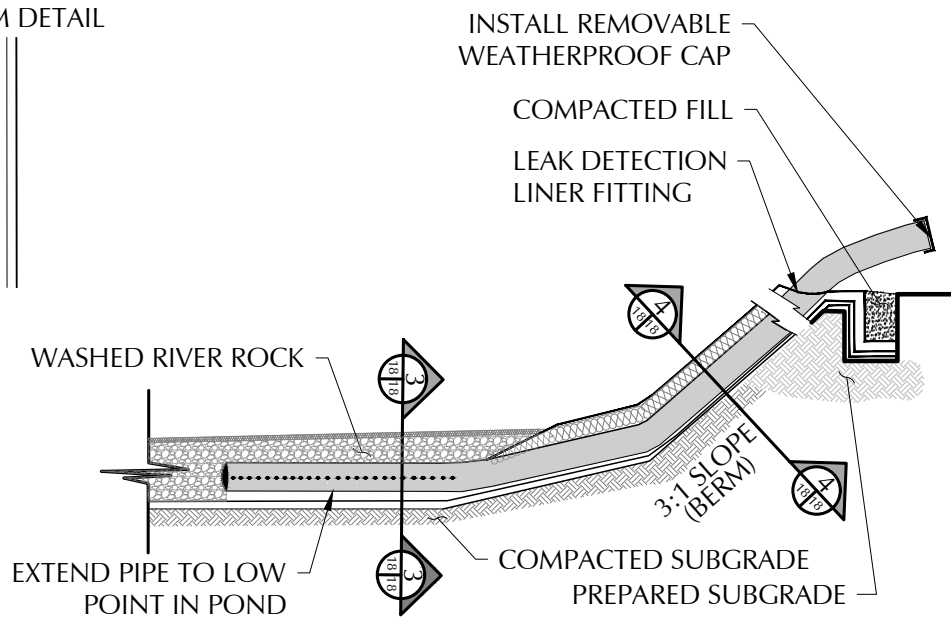

LEAK DETECTION/SAMPLING SYSTEM DETAIL (6)
NOT TO SCALE

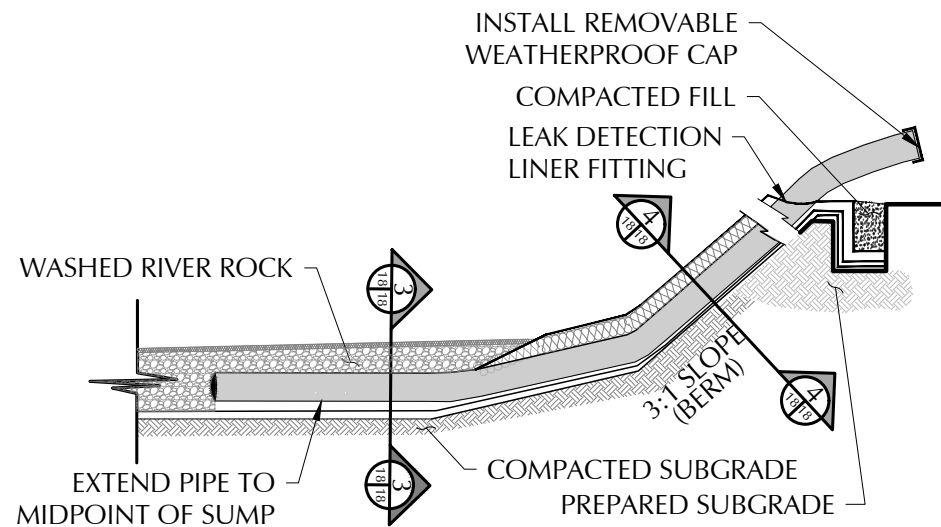

EFFLUENT SUCTION PIPE SAMPLING SYSTEM DETAIL (6)
NOT TO SCALE

PROPOSED PIT REFERENCE TABLE	
DETAIL	DESCRIPTION
PRIMARY LINER	60- MIL HDPE SMOOTH LINER
LEAK DETECTION	200-MIL GEONET
SECONDARY LINER	40-MIL HDPE SMOOTH LINER
UNDERLAYMENT	10 OZ GEOTEXTILE
SUMP	NORTH STORAGE PIT 3,981.0-FT ELEVATION, EAST AND WEST STORAGE PIT 3,976.5-FT ELEVATION EAST AND WEST TREATMENT PIT 3,981.5-FT ELEVATION
BERM (ROAD CREST)	NORTH STORAGE PIT DESIGN ELEV. 4,005.0 FT- RD CREST (35-FT") EAST AND WEST STORAGE PIT DESIGN ELEV. 4,000.5 FT- RD CREST (VARIES) EAST AND WEST TREATMENT PIT DESIGN ELEV. 4,000.5 FT- RD CREST
LEAK DETECTION PIPING	8-IN DR11. PERFORATED HDPE LEAK DETECTION PIPE
EFFLUENT SUCTION PIPING	8-IN DR11. SOLID HDPE SUCTION PIPE

NOTES:

1. LEAK DETECTION SYSTEM TO BE INSTALLED BY OWNER.
2. PERFORATED PIPE TO BE ALONG THE BOTTOM OF THE POND. SOLID PIPE ON THE SIDE SLOPE.
3. CONSTRUCT COMPACTED SUBGRADE TO 95% STANDARD PROCTOR AS PER ASTM D-698.
4. EXTEND 60 MIL. RUB SHEET 1.0-FT PAST TOP OF SHOULDER OF SUMP.
5. WASH RIVER ROCK SHALL BE 3/4" MIN. & 2" MAX.

AS-BUILT PERMIT
MODIFICATION



**ENVIROTECH
ENGINEERING**
2500 North Eleventh Street
Enid, Oklahoma
580.234.8780
envirotechconsulting.com
PE #29736 - Expiration Date: 12-31-2024

COPYRIGHT
This document and the information contained may NOT be reproduced or excerpted from without the express written permission of Envirotech Engineering and Consulting, Inc. Unauthorized copying, disclosure or construction use are prohibited by the copyright law.

NO.	DATE	DESCRIPTION



SUMP DETAILS
RAPTOR RECYCLE FACILITY
SELECT ENERGY SERVICES, LLC.
SECTION 19, TOWNSHIP 18 SOUTH, RANGE 34 EAST,
LEA COUNTY, NEW MEXICO

DATE:	AUGUST 2024
SCALE:	NOT TO SCALE
DESIGNED BY:	M. RATKE
DRAWN BY:	K. TALBOTT
CHECKED BY:	M. RATKE
PROJECT NO.	024116-00
SHEET NO.	18A OF 21

Released to: Imaging: 8/28/2024 1:20:28 PM
16 RAPTOR NEW SUMP DETAILS.DWG



C147 MODIFICATION SUBMITTAL
RAPTOR RECYCLE FACILITY
SECTION 19, TOWNSHIP 18 SOUTH, RANGE 34 EAST
LEA COUNTY, NEW MEXICO
024251-00

APPENDIX F

UPDATED DESIGN & CONSTRUCTION PLAN



Select Water Solutions, LLC is proposing to construct five (5) storage containments and a treatment pad with a Above Ground Storage Tank (AST) in Section 19, Township 18 South, Range 34 East, Lea County, New Mexico. Raptor Recycle shall consist of six (6) containments with a total operational volume of approximately 3,143,651-bbl.

OPERATION AND MAINTENANCE PROCEDURES

Applicable mandates in Rule 34 are underlined. This plan addresses construction of lined earthen containments and an above ground storage tank. Select intends to operate the AST the same way as an earthen containment. *Appendix C* presents an AST schematic. *Appendix G* provides liner and geotextile specifications.

Field conditions may create the need for minor modification of the containment design (e.g. changing the length, width, or depth.)

Dike Protection and Structural Integrity

Design elements are addressed in the section of this submission containing the foundation recommendations. The recommendations are based on site-specific data. The operator, engineer, and selected contractor will review the recommendations prior to beginning the earthwork and adhere to the specific recommendations.

The design and operation provide for the confinement of produced water to prevent releases and to prevent overtopping due to wave action or rainfall. Additionally, the design prevents run-on of surface water as the containment is surrounded by an above-grade levee (berm) and diversion ditch to prevent run-on of surface water.

Stockpile Topsoil

Where topsoil is present, prior to constructing containment, the operator will strip and stockpile the topsoil for use as the final cover or fill at the time of closure. The topsoil will be stockpiled adjacent to perimeter fence surrounding the containment or incorporated into the levee.

Signage

The design calls for an upright sign no less than 12-in by 24-in with lettering not less than two inches in height in a conspicuous place on the fence surrounding the containment. The sign is posted in a manner and location such that a person can easily read the legend. The sign will provide the following information:

1. The operator's name,
2. The location of the site by quarter-quarter or unit letter, section, township and range, and
3. Emergency telephone numbers.



Fencing

The design provides for a fence to enclose the Recycling Containment in a manner that deters unauthorized wildlife and human access. The design calls for a 8-ft tall wire mesh game fence around the containment to exclude wildlife (see detail contained in engineering design drawings). This fence provides greater wildlife (and human) deterrence than the minimum required barbed wire fence with four strands evenly spaced in the interval between one foot and four feet above ground level. The fence will be gated to provide access for maintenance and placement of pumps and other necessary equipment. As stated in the O&M plan, the operator will ensure that all gates associated with the fence are closed and locked when responsible personnel are not onsite.

Netting and Protection of Wildlife

The game fence around the containment will be effective in excluding antelope, deer, coyotes, and most other terrestrial wildlife.

The Recycling Containment is otherwise protective of wildlife, including migratory birds. The containment will contain treated produced water that has not shown to be a material threat to birds due to hydrogen sulfide gas or floating, free-phase hydrocarbons. The O&M plan calls for the operator to inspect for and, within 30 days of discovery, report the discovery of dead migratory birds or other wildlife to the appropriate wildlife agency and to the division district office in order to facilitate assessment and implementation of measures to prevent incidents from reoccurring.

The containment will have a properly constructed foundation and interior slopes consisting of a firm, unyielding base, smooth and free of rocks, debris, sharp edges or irregularities to prevent the liner's rupture or tear. Geotextile may be placed under the liner when needed to reduce localized stress-strain or protuberances that otherwise may compromise the liner's integrity.

The design calls for earthen containments;

1. The levee has an inside grade no steeper than three horizontal feet to one vertical foot (3H:1V).
2. The levee outside grade is no steeper than three horizontal feet to one vertical foot (3H:1V).
3. The top of the levee is wide enough to install an anchor trench and provide adequate room for inspection and maintenance.
4. The caliche gravel placed on the outside levee provides additional erosion control.

Field conditions may create the need for changes to the design. Any changes to the construction or grade requirements due to unforeseen conditions will be reviewed and approved prior to initiating installation of the liner system. Any design change that does not conform to the NMOCD Rule will be the subject of a variance request and will be submitted **to the OCD for review and approval**.



LINER AND DRAINAGE GEOTEXTILE INSTALLATION

The containment has a primary (upper) liner and a secondary (lower) liner with a leak detection system appropriate to the site's conditions.

The primary (upper) liner is a geomembrane liner composed of an impervious, synthetic material that is resistant to ultraviolet light, petroleum hydrocarbons, salts and acidic and alkaline solutions. It is 60-mil HDPE. The secondary liner is 40-mil HDPE. Liner compatibility meets or exceeds a subsequent relevant publication to EPA SW-846 method 9090A.

The Recycling Containment design has a leak detection system between the upper and lower geomembrane liners of 200-mil geonet to facilitate drainage. The leak detection system consists of a properly designed drainage and collection and removal system placed above the lower geomembrane liner in depressions and sloped to facilitate the earliest possible leak detection. The containment floor design calls for a slope toward the sump. This slope, combined with the highly transmissive geonet drainage layer, provides for the earliest possible leak detection.

The liners and drainage material will be installed consistent with the manufacture's specifications (See Appendix G). In addition to any specifications of the manufacturer, protocols for liner installation include measures to:

1. Minimize liner seams and orient them up and down, not across, a slope of the levee.
2. Use factory welded seams where possible.
3. Field seams in geosynthetic material are thermally seamed; prior to field seaming, overlap liner four to six inches.
4. Minimize the number of field seams and corners and irregularly shaped areas.
5. Provide for no horizontal seams within five feet of the slope's toe.
6. Use qualified personnel to perform field welding and testing.
7. Avoid excessive stress-strain on the liner.
8. The edges of all liners are anchored in the bottom of a compacted earth-filled trench that is at least 18-in deep.

At points of discharge into the lined earthen containment, the pipe configuration effectively protects the liner from excessive hydrostatic force or mechanical damage during filling. The design shows that at any point of discharge into or suction from the recycling containment, the liner is protected from excessive hydrostatic force or mechanical damage. External discharge or suction lines do not penetrate the liner.

Pumping from the containment to hydraulic fracturing operations is the responsibility of stimulation contractors. Typically, numerous lines are permanently placed in the containment with floats attached



to prevent damage to the liner system. The containment may be equipped with permanent HDPE stinger (supported by a sacrificial liner or geotextile) for withdrawal of fluid during operations, if the owner deems necessary. External discharge or suction lines do not penetrate the liner.

LEAK DETECTION AND FLUID REMOVAL SYSTEM INSTALLATION

The leak detection system, contains the following design elements:

1. The 200-mil geonet drainage material between the primary and secondary liner is sufficiently permeable to allow the transport of fluids to the observation ports (*Appendix D*).
2. The containment floor, sloped towards the monitoring riser pipe, facilitates the earliest possible leak detection of the containment bottom. A pump may be placed in an observation port to provide for fluid removal.
3. Piping will withstand chemical attack from any seepage, structural loading from stresses and disturbances from overlying water, cover materials, equipment operation, and expansion or contraction (see *Appendix D*).
4. The slope of the interior subgrade should be great enough to facilitate drainage.



C147 MODIFICATION SUBMITTAL
RAPTOR RECYCLE FACILITY
SECTION 19, TOWNSHIP 18 SOUTH, RANGE 34 EAST
LEA COUNTY, NEW MEXICO
024251-00

APPENDIX G

UPDATED MATERIAL SPECIFICATIONS



Select Water Solutions, LLC is proposing to construct five (5) storage containments and a treatment pad with a Above Ground Storage Tank (AST) in Section 19, Township 18 South, Range 34 East, Lea County, New Mexico. Raptor Recycle shall consist of six (6) containments with a total operational volume of approximately 3,143,651-bbl.

GEOMEMBRANE SPECIFICATION

This specification covers the technical requirements for the Manufacturing and Installation of the geomembrane. All materials meet or exceed the requirements of this specification, and all work will be performed in accordance with the procedures provided in these project specifications.

1.1 REFERENCES

- A. American Society for Testing and Materials (ASTM)
 - 1. D 1004 Test Method for Initial Tear Resistance of Plastic Film and Sheet
 - 2. D 1238 Standard Test Method for Flow Rates of Thermoplastics by Extrusion Plastometer
 - 3. D 1505 Test Method for Density of Plastics by the Density-Gradient Technique
 - 4. D 1603 Test Method for Carbon Black in Olefin Plastics
 - 5. D 3895 Standard Test Method for Oxidative-Induction Time of Polyolefins by Differential Scanning Calorimetry
 - 6. D 4218 Standard Test Method for Determination of Carbon Black in Polyethylene Compounds
 - 7. D 4833 Standard Test Method for Index Puncture Resistance of Geotextiles, Geomembranes, and Related Products
 - 8. D 5199 Standard Test Method for Measuring Nominal Thickness of Geotextiles and Geomembranes
 - 9. D 5397 Standard Test Method for Evaluation of Stress Crack Resistance of Polyolefin Geomembranes Using Notched Constant Tensile Load Test
 - 10. D 5596 Standard Test Method for Microscopic Evaluation of the Dispersion of Carbon Black in Polyolefin Geosynthetics
 - 11. D 5994 Standard Test Method for Measuring Core Thickness of Textured Geomembranes
 - 12. D 6392 Standard Test Method for Determining the Integrity of Nonreinforced Geomembrane Seams Produced Using Thermo-Fusion Methods
 - 13. D 6693 Standard Test Method for Determining Tensile Properties of Nonreinforced Polyethylene and Nonreinforced Flexible Polypropylene Geomembranes
 - 14. D 7240 Standard Practice for Leak Location using Geomembranes with an Insulating Layer in Intimate Contact with a Conductive Layer via Electrical Capacitance Technique (Conductive Geomembrane Spark Test)
- B. Geosynthetic Research Institute
 - 1. GRI GM 13 Test Properties, Testing Frequency and Recommended Warranty for High Density Polyethylene (HDPE) Smooth and Textured Geomembranes



2. GRI GM 17 Test Properties, Testing Frequency and Recommended Warranty for Linear Low Density Polyethylene (LLDPE) Smooth and Textured Geomembranes

1.2 DEFINITIONS

- A. Lot - A quantity of resin (usually the capacity of one rail car) used in the manufacture of geomembranes. Finished roll will be identified by a roll number traceable to the resin lot used.
- B. Construction Quality Assurance Consultant (CONSULTANT) – The Party, independent from MANUFACTURER and INSTALLER, that is responsible for observing and documenting activities related to quality assurance during the lining system construction.
- C. ENGINEER- The individual or firm responsible for the design and preparation of the project's Contract Drawings and Specifications.
- D. Geomembrane Manufacturer (MANUFACTURER) - The party responsible for manufacturing the geomembrane rolls.
- E. Geosynthetic Quality Assurance Laboratory (TESTING LABORATORY) – The Party, independent from the OWNER, MANUFACTURER, and INSTALLER, responsible for conducting laboratory tests on samples of geosynthetics obtained at the site or during manufacturing, usually under the direction of the OWNER.
- F. INSTALLER- The Party responsible for field handling, transporting, storing, deploying, seaming, and testing of the geomembrane seams.
- G. Panel- Unit area of geomembrane that will be seamed in the field that is larger than 100-ft².
- H. Patch - Unit area of geomembrane that will be seamed in the field that is less than 100-ft².
- I. Subgrade Surface - Soil layer surface which immediately underlies the geosynthetic material(s).

1.3 SUBMITTALS POST-AWARD

- A. Furnish the following product data, in writing, to ENGINEER prior to installation of the geomembrane material:
 - 1. Resin Data shall include the following:
 - a. Certification stating that the resin meets the specification requirements (see *Table 1.9B*).
 - 2. Geomembrane Roll
 - a. Statement certifying no recycled polymer and no more than 10% rework of the same type of material is added to the resin (product run may be recycled).
- B. The INSTALLER shall furnish the following information to the ENGINEER and OWNER prior to installation:
 - 1. Installation layout drawings
 - 2. Must show proposed panel layout including field seams and details
 - 3. Must be approved prior to installing the geomembrane
 - 4. Approved drawings will be for concept only; actual panel placement will be determined by site conditions



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

5. Installer's Geosynthetic Field Installation Quality Assurance Plan



- C. The INSTALLER will submit the following to the ENGINEER upon completion of installation:
1. Certificate stating the geomembrane has been installed in accordance with the Contract Documents
 2. Material and installation warranties
 3. As-built drawings showing actual geomembrane placement and seams including typical anchor trench detail

1.4 QUALITY ASSURANCE

- A. The OWNER will engage and pay for the services of a Geosynthetic Quality Assurance Consultant and Laboratory to monitor geomembrane installation.

1.5 QUALIFICATIONS

A. MANUFACTURER

1. Geomembrane shall be manufactured by the following:
 - a. GSE Lining Technology, LLC
 - b. approved equal
2. MANUFACTURER shall have manufactured a minimum of 10,000,000 square feet of polyethylene geomembrane during the last year.

B. INSTALLER

1. Installation shall be performed by one of the following installation companies (or approved equal)
 - a. GSE Lining Technology, LLC
 - b. GSE Approved Installers
2. INSTALLER shall have installed a minimum of 5,000,000-ft² of HDPE geomembrane during the last two years.
3. INSTALLER shall have worked in a similar capacity on at least 5 projects similar in complexity to the project described in the contract documents, and with at least 500,000-ft² of HDPE geomembrane installation on each project.
4. The Installation Supervisor shall have worked in a similar capacity on projects similar in size and complexity to the project described in the Contract Documents.
5. The INSTALLER shall provide a minimum of one Master Seamer for work on the project.
6. Must have completed a minimum of 1,000,000-ft² of geomembrane seaming work using the type of seaming apparatus proposed for the use on this Project.

1.6 MATERIAL LABELING, DELIVERY, STORAGE AND HANDLING

- A. LABELING - Each roll of geomembrane delivered to the site shall be labeled by the MANUFACTURER. The label will identify:
1. manufacturer's name
 2. product identification
 3. thickness
 4. length
 5. width



6. roll number
- B. DELIVERY - Rolls of liner will be prepared to ship by appropriate means to prevent damage to the material and to facilitate off-loading.
- C. STORAGE - The on-site storage location for geomembrane material, provided by the CONTRACTOR to protect the geomembrane from punctures, abrasions and excessive dirt and moisture, should have the following characteristics:
 1. level (no wooden pallets)
 2. smooth
 3. dry
 4. protected from theft and vandalism
 5. adjacent to the area being lined
- D. Handling- Materials are to be handled so as to prevent damage.

1.7 WARRANTY

- A. Material shall be warrantied, on a pro-rata basis, against Manufacturer's defects for a period of 5 years from the date of geomembrane installation.
- B. Installation shall be warrantied against defects in workmanship for a period of 1 year from the date of geomembrane completion.

1.8 GEOMEMBRANE PROPERTIES

- A. Material shall be smooth/textured polyethylene geomembrane as shown on the drawings.
- B. Resin
 1. Resin shall be new, first quality, compounded and manufactured specifically for producing geomembrane.
 2. Natural resin (without carbon black) shall meet the following requirements:

Table 1.9B RAW MATERIAL PROPERTIES			
Property	Test Method	HDPE	LLDPE
Density (g/cm ³)	ASTM D 1505	≥ 0.932	≥ 0.915
Melt Flow Index (g/10 min)	ASTM D 1238 (190/2.16)	≤ 1.0	≤ 1.0
OIT (minutes)	ASTM D 3895 (1 atm/200°C)	≥ 100	≥ 100

- C. Geomembrane Rolls
 1. Do not exceed a combined maximum total of 1 percent by weight of additives other than carbon black.
 2. Geomembrane shall be free of holes, pinholes as verified by on-line electrical detection, bubbles, blisters, excessive contamination by foreign matter, and nicks and cuts on roll edges.



3. Geomembrane material is to be supplied in roll form. Each roll is to be identified with labels indicating roll number, thickness, length, width, and MANUFACTURER.
 4. All liner sheets produced at the factory shall be inspected prior to shipment for compliance with the physical property requirements listed in section 1.09 D and be tested by an acceptable method of inspecting for pinholes. If pinholes are located, identified and indicated during manufacturing, these pinholes may be corrected during installation.
- D. Smooth surfaced geomembrane shall meet the requirements shown in the following data sheets below:
1. *Table 1.1* for Black HDPE
 2. *Table 1.2* for Green HDPE
 3. *Table 1.3* for White HDPE
 - a. The geomembrane shall be a white-surfaced, coextruded geomembrane.
 - b. The white surface shall be installed upwards.
 4. *Table 1.4* for Smooth Leak Location Liner HDPE
 - a. The geomembrane shall have a coextruded, electrically conductive layer.
 - b. The conductive layer is installed downward.
 - c. Electrical testing shall be performed after liner installation by the INSTALLER.
 5. *Table 1.5* for Smooth White Leak Location Liner HDPE
 - a. The geomembrane shall have a coextruded, electrically conductive layer.
 - b. The conductive layer is installed downward.
 - c. The geomembrane shall be a white-surfaced, coextruded geomembrane.
 - d. The white surface shall be installed upwards.
 - e. Electrical testing shall be performed after liner installation by the INSTALLER.
 6. *Table 1.6* for Black LLDPE
 7. *Table 1.7* for White-surfaced LLDPE
 - a. The geomembrane shall be a white-surfaced, coextruded geomembrane.
 - b. The white surface shall be installed upwards.
 8. *Table 1.8* for Leak Location Liner LLDPE
 - a. The geomembrane shall have a coextruded, electrically conductive layer.
 - b. The conductive layer is installed downward.
 - c. Electrical testing shall be performed after liner installation by the INSTALLER.
 9. *Table 1.9* for White Leak Location Liner LLDPE
 - a. The geomembrane shall be a white-surfaced, coextruded geomembrane.
 - b. The white surface shall be installed upwards.
 - c. The geomembrane shall have a coextruded, electrically conductive layer.
 - d. The conductive layer is installed downward.
 - e. Electrical testing shall be performed after liner installation by the INSTALLER.



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

TABLE 1.1: GSE HD SMOOTH GEOMEMBRANE							
Tested Property	Test Method	Frequency	Minimum Average Values				
			30 mil	40 mil	60 mil	80 mil	100 mil
Thickness, mil Lowest individual reading	ASTM D 5199	every roll	30 27	40 36	60 54	80 72	100 90
Density, g/cm ³ , (min.)	ASTM D 1505	200,000 lbs	0.940	0.940	0.940	0.940	0.940
Tensile Properties (each direction) Strength at Break, lb/in-width Strength at Yield, lb/in-width Elongation at Break, % Elongation at Yield, %	ASTM D 6693, Type IV Dumbbell, 2 ipm G.L. 2.0 in G.L. 1.3 in	20,000 lbs	114 63 700 12	152 84 700 12	228 126 700 12	304 168 700 12	380 210 700 12
Tear Resistance, lb	ASTM D 1004	45,000 lbs	21	28	42	56	70
Puncture Resistance, lb	ASTM D 4833	45,000 lbs	54	72	108	144	180
Carbon Black Content, % (Range)	ASTM D 1603*/4218	20,000 lbs	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0
Carbon Black Dispersion	ASTM D 5596	45,000 lbs	Note ⁽¹⁾	Note ⁽¹⁾	Note ⁽¹⁾	Note ⁽¹⁾	Note ⁽¹⁾
Notch Constant Tensile Load, hr	ASTM D 5397, Appendix	200,000 lbs	300	300	300	300	300
Oxidative Induction Time, min	ASTM D 3895, 200°C; O ₂ , 1 atm	200,000 lbs	>100	>100	>100	>100	>100
Typical Roll Dimensions							
Roll Length ⁽²⁾ , ft			1,120	870	560	430	340
Roll Width ⁽²⁾ , ft			22.5	22.5	22.5	22.5	22.5
Roll Area, ft ²			25,200	19,575	12,600	9,675	7,650

- NOTES:
 - ⁽¹⁾Dispersion only applies to near spherical agglomerates. 9 of 10 views shall be Category 1 or 2. No more than 1 view from Category 3.
 - ⁽²⁾Roll lengths and widths have a tolerance of $\pm 1\%$.
 - GSE HD Smooth is available in rolls weighing approximately 4,000 lb.
 - All GSE geomembranes have dimensional stability of $\pm 2\%$ when tested according to ASTM D 1204 and LTB of $< -77^{\circ}\text{C}$ when tested according to ASTM D 746.
 - *Modified.



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

TABLE 1.2: GSE GREEN SMOOTH GEOMEMBRANE							
Tested Property	Test Method	Frequency	Minimum Average Values				
			30 mil	40 mil	60 mil	80 mil	100 mil
Thickness, mil Lowest individual reading	ASTM D 5199	every roll	30 27	40 36	60 54	80 72	100 90
Density, g/cm ³ , (min.)	ASTM D 1505	200,000 lbs	0.940	0.940	0.940	0.940	0.940
Tensile Properties (each direction) Strength at Break, lb/in-width Strength at Yield, lb/in-width Elongation at Break, % Elongation at Yield, %	ASTM D 6693, Type IV Dumbbell, 2 ipm G.L. 2.0 in G.L. 1.3 in	20,000 lbs	114 63 700 12	152 84 700 12	228 126 700 12	304 168 700 12	380 210 700 12
Tear Resistance, lb	ASTM D 1004	45,000 lbs	21	28	42	56	70
Puncture Resistance, lb	ASTM D 4833	45,000 lbs	54	72	108	144	180
Carbon Black Content ⁽¹⁾ , % (Range)	ASTM D 1603*/4218	20,000 lbs	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0
Carbon Black Dispersion	ASTM D 5596	45,000 lbs	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾
Notch Constant Tensile Load, hr	ASTM D 5397, Appendix	200,000 lbs	300	300	300	300	300
Oxidative Induction Time, min	ASTM D 3895, 200°C; O ₂ , 1 atm	200,000 lbs	>100	>100	>100	>100	>100
Typical Roll Dimensions							
Roll Length ⁽³⁾ , ft			1,120	870	560	430	340
Roll Width ⁽³⁾ , ft			22.5	22.5	22.5	22.5	22.5
Roll Area, ft ²			25,200	19,575	12,600	9,675	7,650



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

- NOTES:
 - ⁽¹⁾GSE Green Smooth may have an overall ash content of 3.0% due to the green layer. These values apply to the black layer only.
 - ⁽²⁾Dispersion applies to near spherical agglomerates. 9 of 10 views shall be Category 1 or 2. No more than 1 view from Category 3.
 - ⁽³⁾Roll lengths and widths have a tolerance of $\pm 1\%$.
 - GSE Green Smooth is available in rolls weighing approximately 4,000 lb.
 - All GSE geomembranes have dimensional stability of $\pm 2\%$ when tested according to ASTM D 1204 and LTB of $< -77^{\circ}\text{C}$ when tested according to ASTM D 746.
 - *Modified.

TABLE 1.3: GSE WHITE SMOOTH GEOMEMBRANE							
Tested Property	Test Method	Frequency	Minimum Average Values				
			30 mil	40 mil	60 mil	80 mil	100 mil
Thickness, mil Lowest individual reading	ASTM D 5199	every roll	30 27	40 36	60 54	80 72	100 90
Density, g/cm ³ , (min.)	ASTM D 1505	200,000 lbs	0.940	0.940	0.940	0.940	0.940
Tensile Properties (each direction) Strength at Break, lb/in-width Strength at Yield, lb/in-width Elongation at Break, % Elongation at Yield, %	ASTM D 6693, Type IV Dumbbell, 2 ipm G.L. 2.0 in G.L. 1.3 in	20,000 lbs	114 63 700 12	152 84 700 12	228 126 700 12	304 168 700 12	380 210 700 12
Tear Resistance, lb	ASTM D 1004	45,000 lbs	21	28	42	56	70
Puncture Resistance, lb	ASTM D 4833	45,000 lbs	54	72	108	144	180
Carbon Black Content ⁽¹⁾ , % (Range)	ASTM D 1603*/4218	20,000 lbs	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0
Carbon Black Dispersion	ASTM D 5596	45,000 lbs	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾
Notch Constant Tensile Load, hr	ASTM D 5397, Appendix	200,000 lbs	300	300	300	300	300
Oxidative Induction Time, min	ASTM D 3895, 200°C; O ₂ , 1 atm	200,000 lbs	>100	>100	>100	>100	>100
Typical Roll Dimensions							
Roll Length ⁽³⁾ , ft			1,120	870	560	430	340
Roll Width ⁽³⁾ , ft			22.5	22.5	22.5	22.5	22.5



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

Roll Area, ft ²	25,200	19,575	12,600	9,675	7,650
----------------------------	--------	--------	--------	-------	-------

- NOTES:
 - ⁽¹⁾GSE White Smooth may have an overall ash content of 3.0% due to the white layer. These values apply to the black layer only.
 - ⁽²⁾Dispersion applies to near spherical agglomerates. 9 of 10 views shall be Category 1 or 2. No more than 1 view from Category 3.
 - ⁽³⁾Roll lengths and widths have a tolerance of $\pm 1\%$.
 - GSE White Smooth is available in rolls weighing approximately 4,000 lb.
 - All GSE geomembranes have dimensional stability of $\pm 2\%$ when tested according to ASTM D1204 and LTB of $< -77^{\circ}\text{C}$ when tested according to ASTM D 746.
 - *Modified.

TABLE 1.4: GSE LEAK LOCATION SMOOTH GEOMEMBRANE						
Tested Property	Test Method	Frequency	Minimum Average Values			
			40 mil	60 mil	80 mil	100 mil
Thickness, mil Lowest individual reading	ASTM D 5199	every roll	40 36	60 54	80 72	100 90
Density, g/cm ³ , (min.)	ASTM D 1505	200,000 lbs	0.940	0.940	0.940	0.940
Tensile Properties (each direction) Strength at Break, lb/in-width Strength at Yield, lb/in-width Elongation at Break, % Elongation at Yield, %	ASTM D 6693, Type IV Dumbbell, 2 ipm G.L. 2.0 in G.L. 1.3 in	20,000 lbs	152 84 700 12	228 126 700 12	304 168 700 12	380 210 700 12
Tear Resistance, lb	ASTM D 1004	45,000 lbs	28	42	56	70
Puncture Resistance, lb	ASTM D 4833	45,000 lbs	72	108	144	180
Carbon Black Content ⁽¹⁾ , % (Range)	ASTM D 1603*/4218	20,000 lbs	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0
Carbon Black Dispersion	ASTM D 5596	45,000 lbs	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾
Notch Constant Tensile Load, hr	ASTM D 5397, Appendix	200,000 lbs	300	300	300	300
Oxidative Induction Time, min	ASTM D 3895, 200°C; O ₂ , 1 atm	200,000 lbs	>100	>100	>100	>100
Typical Roll Dimensions						
Roll Length ⁽³⁾ , ft			870	560	430	340
Roll Width ⁽³⁾ , ft			22.5	22.5	22.5	22.5



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

Roll Area, ft ²	19,575	12,600	9,675	7,650
----------------------------	--------	--------	-------	-------

- NOTES:
 - ⁽¹⁾GSE Leak Location Smooth may have an overall ash content of 3.0% due to the conductive layer. These values apply to the non-conductive black layer only.
 - ⁽²⁾Dispersion applies to near spherical agglomerates. 9 of 10 views shall be Category 1 or 2. No more than 1 view from Category 3.
 - ⁽³⁾Roll lengths and widths have a tolerance of $\pm 1\%$.
 - GSE Leak Location Smooth is available in rolls weighing approximately 4,000 lb.
 - All GSE geomembranes have dimensional stability of $\pm 2\%$ when tested according to ASTM D 1204 and LTB of $< -77^{\circ}\text{C}$ when tested according to ASTM D746.
 - *Modified.



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

TABLE 1.5: GSE LEAK LOCATION WHITE SMOOTH GEOMEMBRANE						
Tested Property	Test Method	Frequency	Minimum Average Values			
			40 mil	60 mil	80 mil	100 mil
Thickness, mil Lowest individual reading	ASTM D 5199	every roll	40 36	60 54	80 72	100 90
Density, g/cm ³ , (min.)	ASTM D 1505	200,000 lbs	0.940	0.940	0.940	0.940
Tensile Properties (each direction) Strength at Break, lb/in-width Strength at Yield, lb/in-width Elongation at Break, % Elongation at Yield, %	ASTM D 6693, Type IV Dumbbell, 2 ipm G.L. 2.0 in G.L. 1.3 in	20,000 lbs	152 84 700 12	228 126 700 12	304 168 700 12	380 210 700 12
Tear Resistance, lb	ASTM D 1004	45,000 lbs	28	42	56	70
Puncture Resistance, lb	ASTM D 4833	45,000 lbs	72	108	144	180
Carbon Black Content ⁽¹⁾ , % (Range)	ASTM D 1603*/4218	20,000 lbs	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0
Carbon Black Dispersion	ASTM D 5596	45,000 lbs	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾
Notch Constant Tensile Load, hr	ASTM D 5397, Appendix	200,000 lbs	300	300	300	300
Oxidative Induction Time, min	ASTM D 3895, 200°C; O ₂ , 1 atm	200,000 lbs	>100	>100	>100	>100
Typical Roll Dimensions						
Roll Length ⁽³⁾ , ft			870	560	430	340
Roll Width ⁽³⁾ , ft			22.5	22.5	22.5	22.5
Roll Area, ft ²			19,575	12,600	9,675	7,650

- NOTES:
 - ⁽¹⁾GSE Leak Location White Smooth may have an overall ash content of 3.0% due to the white and conductive layers. These values apply to the black layer only.
 - ⁽²⁾Dispersion applies to near spherical agglomerates. 9 of 10 views shall be Category 1 or 2. No more than 1 view from Category 3.
 - ⁽³⁾Roll lengths and widths have a tolerance of $\pm 1\%$.
 - GSE Leak Location White Smooth is available in rolls weighing approximately 4,000 lb.
 - All GSE geomembranes have dimensional stability of $\pm 2\%$ when tested according to ASTM D 1204 and LTB of $<-77^{\circ}\text{C}$ when tested according to ASTM D 746.
 - *Modified.



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

TABLE 1.6: GSE ULTRAFLEX SMOOTH GEOMEMBRANE						
Tested Property	Test Method	Frequency	Minimum Average Value			
			40 mil	60 mil	80 mil	100 mil
Thickness, mil Lowest individual reading	ASTM D 5199	every roll	40 36	60 54	80 72	100 90
Density, g/cm ³ (max.)	ASTM D 1505	200,000 lbs	0.939	0.939	0.939	0.939
Tensile Properties (each direction) Strength at Break, lb/in-width Elongation at Break, %	ASTM D 6693, Type IV Dumbbell, 2 ipm G.L. 2.0 in	20,000 lbs	152 800	228 800	304 800	380 800
Tear Resistance, lb	ASTM D 1004	45,000 lbs	22	33	44	55
Puncture Resistance, lb	ASTM D 4833	45,000 lbs	56	84	112	140
Carbon Black Content, % (Range)	ASTM D 1603*/4218	20,000 lbs	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0
Carbon Black Dispersion	ASTM D 5596	45,000 lbs	Note ⁽¹⁾	Note ⁽¹⁾	Note ⁽¹⁾	Note ⁽¹⁾
Oxidative Induction Time, min	ASTM D 3895, 200°C; O ₂ , 1 atm	200,000 lbs	>100	>100	>100	>100
Typical Roll Dimensions						
Roll Length ⁽²⁾ , ft			870	560	430	340
Roll Width ⁽²⁾ , ft			22.5	22.5	22.5	22.5
Roll Area, ft ²			19,575	12,600	9,675	7,650

- NOTES:
 - ⁽¹⁾Dispersion only applies to near spherical agglomerates. 9 of 10 views shall be Category 1 or 2. No more than 1 view from Category 3.
 - ⁽²⁾Roll lengths and widths have a tolerance of ± 1 %.
 - GSE UltraFlex is available in rolls weighing approximately 4,000 lb.
 - All GSE geomembranes have dimensional stability of ± 2 % when tested according to ASTM D 1204 and LTB of $< -77^{\circ}\text{C}$ when tested according to ASTM D 746.
 - *Modified.



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

TALBE 1.7: GSE ULTRAFLEX WHITE SMOOTH GEOMEMBRANE						
Tested Property	Test Method	Frequency	Minimum Average Value			
			40 mil	60 mil	80 mil	100 mil
Thickness, mil Lowest individual reading	ASTM D 5199	every roll	40 36	60 54	80 72	100 90
Density, g/cm ³ (max.)	ASTM D 1505	200,000 lbs	0.939	0.939	0.939	0.939
Tensile Properties (each direction) Strength at Break, lb/in-width Elongation at Break, %	ASTM D 6693, Type IV Dumbbell, 2 ipm G.L. 2.0 in	20,000 lbs	152 800	228 800	304 800	380 800
Tear Resistance, lb	ASTM D 1004	45,000 lbs	22	33	44	55
Puncture Resistance, lb	ASTM D 4833	45,000 lbs	56	84	112	140
Carbon Black Content ⁽¹⁾ , % (Range)	ASTM D 1603*/4218	20,000 lbs	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0
Carbon Black Dispersion	ASTM D 5596	45,000 lbs	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾
Oxidative Induction Time, min	ASTM D 3895, 200°C; O ₂ , 1 atm	200,000 lbs	>100	>100	>100	>100
Typical Roll Dimensions						
Roll Length ⁽³⁾ , ft			870	560	430	340
Roll Width ⁽³⁾ , ft			22.5	22.5	22.5	22.5
Roll Area, ft ²			19,575	12,600	9,675	7,650

- NOTES:
 - ⁽¹⁾GSE UltraFlex White Smooth may have an overall ash content greater than 3.0% due to the white layer. These values apply to the black layer only.
 - ⁽²⁾ Dispersion only applies to near spherical agglomerates. 9 of 10 views shall be Category 1 or 2. No more than 1 view from Category 3.
 - ⁽³⁾Roll lengths and widths have a tolerance of $\pm 1\%$.
 - GSE UltraFlex White Smooth is available in rolls weighing approximately 4,000 lb.
 - All GSE geomembranes have dimensional stability of $\pm 2\%$ when tested according to ASTM D 1204 and LTB of $< -77^{\circ}\text{C}$ when tested according to ASTM D 746.
 - *Modified.



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

TABLE 1.8: GSE ULTRAFLEX LEAK LOCATION LINER SMOOTH GEOMEMBRANE						
Tested Property	Test Method	Frequency	Minimum Average Value			
			40 mil	60 mil	80 mil	100 mil
Thickness, mil Lowest individual reading	ASTM D 5199	every roll	40 36	60 54	80 72	100 90
Density, g/cm ³ (max.)	ASTM D 1505	200,000 lbs	0.939	0.939	0.939	0.939
Tensile Properties (each direction) Strength at Break, lb/in-width Elongation at Break, %	ASTM D 6693, Type IV Dumbbell, 2 ipm G.L. 2.0 in	20,000 lbs	152 800	228 800	304 800	380 800
Tear Resistance, lb	ASTM D 1004	45,000 lbs	22	33	44	55
Puncture Resistance, lb	ASTM D 4833	45,000 lbs	56	84	112	140
Carbon Black Content ⁽¹⁾ , % (Range)	ASTM D 1603*/4218	20,000 lbs	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0
Carbon Black Dispersion	ASTM D 5596	45,000 lbs	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾
Oxidative Induction Time, min	ASTM D 3895, 200°C; O ₂ , 1 atm	200,000 lbs	>100	>100	>100	>100
Typical Roll Dimensions						
Roll Length ⁽³⁾ , ft			870	560	430	340
Roll Width ⁽³⁾ , ft			22.5	22.5	22.5	22.5
Roll Area, ft ²			19,575	12,600	9,675	7,650

- NOTES:
 - ⁽¹⁾GSE UltraFlex Leak Location Smooth may have an overall ash content greater than 3.0% due to the conductive layer. These values apply to the non-conductive black layer only.
 - ⁽²⁾Dispersion only applies to near spherical agglomerates. 9 of 10 views shall be Category 1 or 2. No more than 1 view from Category 3.
 - ⁽³⁾Roll lengths and widths have a tolerance of $\pm 1\%$.
 - GSE UltraFlex Leak Location Smooth is available in rolls weighing approximately 4,000 lb.
 - All GSE geomembranes have dimensional stability of $\pm 2\%$ when tested according to ASTM D 1204 and LTB of $< -77^{\circ}\text{C}$ when tested according to ASTM D 746.
 - *Modified.



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

TABLE 1.9: GSE ULTRAFLEX LEAK LOCATION LINER WHITE SMOOTH GEOMEMBRANE						
Tested Property	Test Method	Frequency	Minimum Average Value			
			40 mil	60 mil	80 mil	100 mil
Thickness, mil Lowest individual reading	ASTM D 5199	every roll	40 36	60 54	80 72	100 90
Density, g/cm ³ (max.)	ASTM D 1505	200,000 lbs	0.939	0.939	0.939	0.939
Tensile Properties (each direction) Strength at Break, lb/in- width Elongation at Break, %	ASTM D 6693, Type IV Dumbbell, 2 ipm G.L. 2.0 in	20,000 lbs	152 800	228 800	304 800	380 800
Tear Resistance, lb	ASTM D 1004	45,000 lbs	22	33	44	55
Puncture Resistance, lb	ASTM D 4833	45,000 lbs	56	84	112	140
Carbon Black Content ⁽¹⁾ , % (Range)	ASTM D 1603*/4218	20,000 lbs	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0
Carbon Black Dispersion	ASTM D 5596	45,000 lbs	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾
Oxidative Induction Time, min	ASTM D 3895, 200°C; O ₂ , 1 atm	200,000 lbs	>100	>100	>100	>100
Typical Roll Dimensions						
Roll Length ⁽³⁾ , ft			870	560	430	340
Roll Width ⁽³⁾ , ft			22.5	22.5	22.5	22.5
Roll Area, ft ²			19,575	12,600	9,675	7,650

- NOTES:
 - ⁽¹⁾GSE UltraFlex Leak Location White Smooth may have an overall ash content greater than 3.0% due to the white and conductive layers. These values apply to the non-conductive black layer only.
 - ⁽²⁾Dispersion only applies to near spherical agglomerates. 9 of 10 views shall be Category 1 or 2. No more than 1 view from Category 3.
 - ⁽³⁾Roll lengths and widths have a tolerance of $\pm 1\%$.
 - GSE UltraFlex Leak Location White Smooth is available in rolls weighing approximately 4,000 lb.
 - All GSE geomembranes have dimensional stability of $\pm 2\%$ when tested according to ASTM D 1204 and LTB of $< -77^{\circ}\text{C}$ when tested according to ASTM D 746.
 - *Modified.



- E. Textured surfaced geomembrane shall meet the requirements shown in the following data sheets below.
1. Table 2.1 for Black coextruded textured HDPE
 2. Table 2.2 for Green coextruded textured HDPE
 3. Table 2.3 for White coextruded textured HDPE
 - a. The geomembrane shall be a white-surfaced, coextruded geomembrane.
 - b. The white surface shall be installed upwards.
 4. Table 2.4 for Leak Location Liner coextruded textured HDPE
 - a. The geomembrane shall be a white-surfaced, coextruded geomembrane.
 - b. The white surface shall be installed upwards.
 5. Table 2.5 for White Leak Location Liner coextruded textured HDPE
 - a. The geomembrane shall be a white-surfaced, coextruded geomembrane.
 - b. The white surface shall be installed upwards.
 6. Table 2.6 for Black coextruded textured LLDPE
 7. Table 2.7 for White coextruded textured LLDPE
 - a. The geomembrane shall be a white-surfaced, coextruded geomembrane.
 - b. The white surface shall be installed upwards.
 8. Table 2.8 for Leak Location Liner coextruded textured LLDPE
 - a. The geomembrane shall have a coextruded, electrically conductive layer.
 - b. The conductive layer is installed downward.
 - c. Electrical testing shall be performed after liner installation by the INSTALLER.
 9. Table 2.9 for White Leak Location Liner coextruded textured LLDPE
 - a. The geomembrane shall be a white-surfaced, coextruded geomembrane.
 - b. The white surface shall be installed upwards.
 - c. The geomembrane shall have a coextruded, electrically conductive layer.
 - d. The conductive layer is installed downward.
 - e. Electrical testing shall be performed after liner installation by the INSTALLER.



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

TABLE 2.1: GSE HD TEXTURED GEOMEMBRANE							
Tested Property	Test Method	Frequency	Minimum Average Values				
			30 mil	40 mil	60 mil	80 mil	100 mil
Thickness, mil Lowest individual reading	ASTM D 5994	every roll	30 27	40 36	60 54	80 72	100 90
Density, g/cm ³ , (min.)	ASTM D 1505	200,000 lbs	0.940	0.940	0.940	0.940	0.940
Tensile Properties (each direction) Strength at Break, lb/in-width Strength at Yield, lb/in-width Elongation at Break, % Elongation at Yield, %	ASTM D 6693, Type IV Dumbbell, 2 ipm G.L. 2.0 in G.L. 1.3 in	20,000 lbs	45 63 100 12	60 84 100 12	90 126 100 12	120 168 100 12	150 210 100 12
Tear Resistance, lb	ASTM D 1004	45,000 lbs	21	28	42	56	70
Puncture Resistance, lb	ASTM D 4833	45,000 lbs	45	60	90	120	150
Carbon Black Content, % (Range)	ASTM D 1603*/4218	20,000 lbs	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0
Carbon Black Dispersion	ASTM D 5596	45,000 lbs	Note ⁽¹⁾	Note ⁽¹⁾	Note ⁽¹⁾	Note ⁽¹⁾	Note ⁽¹⁾
Asperity Height, mil	ASTM D 7466	second roll	16	18	18	18	18
Notch Constant Tensile Load ⁽²⁾ , hr	ASTM D 5397, Appendix	200,000 lbs	300	300	300	300	300
Oxidative Induction Time, min	ASTM D 3895, 200°C; O ₂ , 1 atm	200,000 lbs	>100	>100	>100	>100	>100
Typical Roll Dimensions							
Roll Length ⁽³⁾ , ft	Double-Sided	Textured	830	700	520	400	330
	Single-Sided	Textured	1,010	780	540	410	330
Roll Width ⁽³⁾ , ft			22.5	22.5	22.5	22.5	22.5
Roll Area, ft ²	Double-Sided	Textured	18,675	15,750	11,700	9,000	7,425
	Single-Sided	Textured	22,725	17,550	12,150	9,225	7,425



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

- NOTES:
 - ⁽¹⁾Dispersion only applies to near spherical agglomerates. 9 of 10 views shall be Category 1 or 2. No more than 1 view from Category 3.
 - ⁽²⁾NCTL for GSE HD Textured is conducted on representative smooth geomembrane samples.
 - ⁽³⁾Roll lengths and widths have a tolerance of $\pm 1\%$.
 - GSE HD Textured is available in rolls weighing approximately 4,000 lb.
 - All GSE geomembranes have dimensional stability of $\pm 2\%$ when tested according to ASTM D1204 and LTB of $< -77^{\circ}\text{C}$ when tested according to ASTM D 746.
 - *Modified.

TABLE 2.2 GSE GREEN TEXTURED GEOMEMBRANE							
Tested Property	Test Method	Frequency	Minimum Average Values				
			30 mil	40 mil	60 mil	80 mil	100 mil
Thickness, mil Lowest individual reading	ASTM D 5994	every roll	30 27	40 36	60 54	80 72	100 90
Density, g/cm ³ , (min.)	ASTM D 1505	200,000 lbs	0.940	0.940	0.940	0.940	0.940
Tensile Properties (each direction) Strength at Break, lb/in-width Strength at Yield, lb/in-width Elongation at Break, % Elongation at Yield, %	ASTM D 6693, Type IV Dumbbell, 2 ipm G.L. 2.0 in G.L. 1.3 in	20,000 lbs	45 63 100 12	60 84 100 12	90 126 100 12	120 168 100 12	150 210 100 12
Tear Resistance, lb	ASTM D 1004	45,000 lbs	21	28	42	56	70
Puncture Resistance, lb	ASTM D 4833	45,000 lbs	45	60	90	120	150
Carbon Black Content ⁽¹⁾ , % (Range)	ASTM D 1603*/4218	20,000 lbs	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0
Carbon Black Dispersion	ASTM D 5596	45,000 lbs	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾
Asperity Height, mil	ASTM D 7466	second roll	16	18	18	18	18
Notch Constant Tensile Load ⁽³⁾ , hr	ASTM D 5397, Appendix	200,000 lbs	300	300	300	300	300
Oxidative Induction Time, min	ASTM D 3895, 200°C; O ₂ , 1 atm	200,000 lbs	>100	>100	>100	>100	>100
Typical Roll Dimensions							
Roll Length ⁽⁴⁾ , ft	Double-Sided	Textured	830	700	520	400	330
	Single-Sided Textured		1,010	780	540	410	330
Roll Width ⁽⁴⁾ , ft			22.5	22.5	22.5	22.5	22.5



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

Roll Area, ft ²	Double-Sided	Textured	18,675	15,750	11,700	9,000	7,425
	Single-Sided Textured		22,725	17,550	12,150	9,225	7,425

- NOTES:
 - ⁽¹⁾GSE Green may have an overall ash content greater than 3.0% due to the green layer. These values apply to the black layer only.
 - ⁽²⁾Dispersion only applies to near spherical agglomerates. 9 of 10 views shall be Category 1 or 2. No more than 1 view from Category 3.
 - ⁽³⁾NCTL for GSE Green Textured is conducted on representative smooth geomembrane samples.
 - ⁽⁴⁾Roll lengths and widths have a tolerance of $\pm 1\%$.
 - GSE Green Textured is available in rolls weighing approximately 4,000 lb.
 - All GSE geomembranes have dimensional stability of $\pm 2\%$ when tested according to ASTM D 1204 and LTB of $< -77^{\circ}\text{C}$ when tested according to ASTM D 746.
 - *Modified.



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

TABLE 2.3: GSE WHITE TEXTURED GEOMEMBRANE							
Tested Property	Test Method	Frequency	Minimum Average Values				
			30 mil	40 mil	60 mil	80 mil	100 mil
Thickness, mil Lowest individual reading	ASTM D 5994	every roll	30 27	40 36	60 54	80 72	100 90
Density, g/cm ³ , (min.)	ASTM D 1505	200,000 lbs	0.940	0.940	0.940	0.940	0.940
Tensile Properties (each direction) Strength at Break, lb/in-width Strength at Yield, lb/in-width Elongation at Break, % Elongation at Yield, %	ASTM D 6693, Type IV Dumbbell, 2 ipm G.L. 2.0 in G.L. 1.3 in	20,000 lbs	45 63 100 12	60 84 100 12	90 126 100 12	120 168 100 12	150 210 100 12
Tear Resistance, lb	ASTM D 1004	45,000 lbs	21	28	42	56	70
Puncture Resistance, lb	ASTM D 4833	45,000 lbs	45	60	90	120	150
Carbon Black Content ⁽¹⁾ , % (Range)	ASTM D 1603*/4218	20,000 lbs	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0
Carbon Black Dispersion	ASTM D 5596	45,000 lbs	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾
Asperity Height, mil	ASTM D 7466	second roll	16	18	18	18	18
Notch Constant Tensile Load ⁽³⁾ , hr	ASTM D 5397, Appendix	200,000 lbs	300	300	300	300	300
Oxidative Induction Time, min	ASTM D 3895, 200°C; O ₂ , 1 atm	200,000 lbs	>100	>100	>100	>100	>100
Typical Roll Dimensions							
Roll Length ⁽⁴⁾ , ft	Double-Sided Textured Single-Sided Textured		830 1,010	700 780	520 540	400 410	330 330
Roll Width ⁽⁴⁾ , ft			22.5	22.5	22.5	22.5	22.5
Roll Area, ft ²	Double-Sided Textured Single-Sided Textured		18,675 22,725	15,750 17,550	11,700 12,150	9,000 9,225	7,425 7,425



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

-
- NOTES:
 - ⁽¹⁾GSE White may have an overall ash content greater than 3.0% due to the white layer. These values apply to the black layer only.
 - ⁽²⁾Dispersion only applies to near spherical agglomerates. 9 of 10 views shall be Category 1 or 2. No more than 1 view from Category 3.
 - ⁽³⁾NCTL for GSE White Textured is conducted on representative smooth geomembrane samples.
 - ⁽⁴⁾Roll lengths and widths have a tolerance of $\pm 1\%$.
 - GSE White Textured is available in rolls weighing approximately 4,000 lb.
 - All GSE geomembranes have dimensional stability of $\pm 2\%$ when tested according to ASTM D 1204 and LTB of $< -77^{\circ}\text{C}$ when tested according to ASTM D 746.
 - *Modified.



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

TABLE 2.4: GSE LEAK LOCATION LINER TEXTURED GEOMEMBRANE						
Tested Property	Test Method	Frequency	Minimum Average Values			
			40 mil	60 mil	80 mil	100 mil
Thickness, mil Lowest individual reading	ASTM D 5994	every roll	40 36	60 54	80 72	100 90
Density, g/cm ³ , (min.)	ASTM D 1505	200,000 lbs	0.940	0.940	0.940	0.940
Tensile Properties (each direction) Strength at Break, lb/in- width Strength at Yield, lb/in- width Elongation at Break, % Elongation at Yield, %	ASTM D 6693, Type IV Dumbbell, 2 ipm G.L. 2.0 in G.L. 1.3 in	20,000 lbs	60 84 100 12	90 126 100 12	120 168 100 12	150 210 100 12
Tear Resistance, lb	ASTM D 1004	45,000 lbs	28	42	56	70
Puncture Resistance, lb	ASTM D 4833	45,000 lbs	60	90	120	150
Carbon Black Content ⁽¹⁾ , % (Range)	ASTM D 1603*/4218	20,000 lbs	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0
Carbon Black Dispersion	ASTM D 5596	45,000 lbs	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾
Asperity Height, mil	ASTM D 7466	second roll	18	18	18	18
Notch Constant Tensile Load ⁽³⁾ , hr	ASTM D 5397, Appendix	200,000 lbs	300	300	300	300
Oxidative Induction Time, min	ASTM D 3895, 200°C; O ₂ , 1 atm	200,000 lbs	>100	>100	>100	>100
Typical Roll Dimensions						
Roll Length ⁽⁴⁾ , ft	Double-Sided	Textured	700	520	400	330
	Single-Sided	Textured	780	540	410	330
Roll Width ⁽⁴⁾ , ft			22.5	22.5	22.5	22.5
Roll Area, ft ²	Double-Sided	Textured	15,750	11,700	9,000	7,425
	Single-Sided	Textured	17,550	12,150	9,225	7,425



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

-
- NOTES:
 - ⁽¹⁾GSE Leak Location may have an overall ash content greater than 3.0% due to the conductive layer. These values apply to the non-conductive layer only.
 - ⁽²⁾Dispersion only applies to near spherical agglomerates. 9 of 10 views shall be Category 1 or 2. No more than 1 view from Category 3.
 - ⁽³⁾NCTL for GSE Leak Location Textured is conducted on representative smooth geomembrane samples.
 - ⁽⁴⁾Roll lengths and widths have a tolerance of $\pm 1\%$.
 - GSE Leak Location Textured is available in rolls weighing approximately 4,000 lb.
 - All GSE geomembranes have dimensional stability of $\pm 2\%$ when tested according to ASTM D 1204 and LTB of $< -77^{\circ}\text{C}$ when tested according to ASTM D 746.
 - *Modified.



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

TABLE 2.5: GSE LEAK LOCATION LINER WHITE TEXTURED GEOMEMBRANE						
Tested Property	Test Method	Frequency	Minimum Average Values			
			40 mil	60 mil	80 mil	100 mil
Thickness, mil	ASTM D 5994	every roll	40	60	80	100
Lowest individual reading			36	54	72	90
Density, g/cm ³ , (min.)	ASTM D 1505	200,000 lbs	0.940	0.940	0.940	0.940
Tensile Properties (each direction)	ASTM D 6693, Type IV	20,000 lbs				
Strength at Break, lb/in-width	Dumbbell, 2 ipm		60	90	120	150
Strength at Yield, lb/in-width			84	126	168	210
Elongation at Break, %	G.L. 2.0 in		100	100	100	100
Elongation at Yield, %	G.L. 1.3 in		12	12	12	12
Tear Resistance, lb	ASTM D 1004	45,000 lbs	28	42	56	70
Puncture Resistance, lb	ASTM D 4833	45,000 lbs	60	90	120	150
Carbon Black Content ⁽¹⁾ , % (Range)	ASTM D 1603*/4218	20,000 lbs	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0
Carbon Black Dispersion	ASTM D 5596	45,000 lbs	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾
Asperity Height, mil	ASTM D 7466	second roll	18	18	18	18
Notch Constant Tensile Load ⁽²⁾ , hr	ASTM D 5397, Appendix	200,000 lbs	300	300	300	300
Oxidative Induction Time, min	ASTM D 3895, 200°C; O ₂ , 1 atm	200,000 lbs	>100	>100	>100	>100
Typical Roll Dimensions						
Roll Length ⁽⁴⁾ , ft	Double-Sided	Textured	700	520	400	330
	Single-Sided	Textured	780	540	410	330
Roll Width ⁽⁴⁾ , ft			22.5	22.5	22.5	22.5
Roll Area, ft ²	Double-Sided	Textured	15,750	11,700	9,000	7,425
	Single-Sided	Textured	17,550	12,150	9,225	7,425



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

- NOTES:
 - ⁽¹⁾GSE Leak Location White may have an overall ash content greater than 3.0% due to the conductive and white layers. These values apply to the non-conductive black layer only.
 - ⁽²⁾Dispersion only applies to near spherical agglomerates. 9 of 10 views shall be Category 1 or 2. No more than 1 view from Category 3.
 - ⁽³⁾NCTL for GSE Leak Location White Textured is conducted on representative smooth geomembrane samples.
 - ⁽⁴⁾Roll lengths and widths have a tolerance of $\pm 1\%$.
 - GSE Leak Location White Textured is available in rolls weighing approximately 4,000 lb.
 - All GSE geomembranes have dimensional stability of $\pm 2\%$ when tested according to ASTM D 1204 and LTB of $< -77^{\circ}\text{C}$ when tested according to ASTM D 746.
 - *Modified.

TABLE 2.6: GSE ULTRAFLEX TEXTURED GEOMEMBRANE						
Tested Property	Test Method	Frequency	Minimum Average Values			
			40 mil	60 mil	80 mil	100 mil
Thickness, mil Lowest individual reading	ASTM D 5199	every roll	40 36	60 54	80 72	100 90
Density, g/cm ³ (max.)	ASTM D 1505	200,000 lbs	0.939	0.939	0.939	0.939
Tensile Properties (each direction) Strength at Break, lb/in-width Elongation at Break, %	ASTM D 6693, Type IV Dumbbell, 2 ipm G.L. 2.0 in	20,000 lbs	60 250	90 250	120 250	150 250
Tear Resistance, lb	ASTM D 1004	45,000 lbs	22	33	44	55
Puncture Resistance, lb	ASTM D 4833	45,000 lbs	44	66	88	110
Carbon Black Content, % (Range)	ASTM D 1603*/4218	20,000 lbs	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0
Carbon Black Dispersion	ASTM D 5596	45,000 lbs	Note ⁽¹⁾	Note ⁽¹⁾	Note ⁽¹⁾	Note ⁽¹⁾
Asperity Height, mil	ASTM D 7466	second roll	18	18	18	18
Oxidative Induction Time, min	ASTM D 3895, 200°C; O ₂ , 1 atm	200,000 lbs	>100	>100	>100	>100
Typical Roll Dimensions						
Roll Length ⁽²⁾ , ft	Double-Sided Single-Sided Textured	Textured	700 650	520 420	400 320	330 250
Roll Width ⁽²⁾ , ft			22.5	22.5	22.5	22.5



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

Roll Area, ft ²	Double-Sided	Textured	15,750	11,700	9,000	7,425
	Single-Sided	Textured	14,625	9,450	7,200	5,625

- NOTES:
 - ⁽¹⁾Dispersion only applies to near spherical agglomerates. 9 of 10 views shall be Category 1 or 2. No more than 1 view from Category 3.
 - ⁽²⁾Roll lengths and widths have a tolerance of $\pm 1\%$.
 - GSE UltraFlex Textured is available in rolls weighing approximately 4,000 lb.
 - All GSE geomembranes have dimensional stability of $\pm 2\%$ when tested according to ASTM D 1204 and LTB of $< -77^{\circ}\text{C}$ when tested according to ASTM D 746.
 - *Modified.



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

TABLE 2.7: GSE ULTRAFLEX WHITE TEXTURED GEOMEMBRANE						
Tested Property	Test Method	Frequency	Minimum Average Values			
			40 mil	60 mil	80 mil	100 mil
Thickness, mil Lowest individual reading	ASTM D 5199	every roll	40 36	60 54	80 72	100 90
Density, g/cm ³ (max.)	ASTM D 1505	200,000 lbs	0.939	0.939	0.939	0.939
Tensile Properties (each direction) Strength at Break, lb/in- width Elongation at Break, %	ASTM D 6693, Type IV Dumbbell, 2 ipm G.L. 2.0 in	20,000 lbs	60 250	90 250	120 250	150 250
Tear Resistance, lb	ASTM D 1004	45,000 lbs	22	33	44	55
Puncture Resistance, lb	ASTM D 4833	45,000 lbs	44	66	88	110
Carbon Black Content ⁽¹⁾ , % (Range)	ASTM D 1603*/4218	20,000 lbs	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0
Carbon Black Dispersion	ASTM D 5596	45,000 lbs	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾
Asperity Height, mil	ASTM D 7466	second roll	18	18	18	18
Oxidative Induction Time, min	ASTM D 3895, 200°C; O ₂ , 1 atm	200,000 lbs	>100	>100	>100	>100
Typical Roll Dimensions						
Roll Length ⁽³⁾ , ft	Double-Sided	Textured	700	520	400	330
	Single-Sided	Textured	650	420	320	250
Roll Width ⁽³⁾ , ft			22.5	22.5	22.5	22.5
Roll Area, ft ²	Double-Sided	Textured	15,750	11,700	9,000	7,425
	Single-Sided	Textured	14,625	9,450	7,200	5,625

• NOTES:

- ⁽¹⁾GSE UltraFlex White Textured may have an overall ash content greater than 3.0% due to the white layer. These values apply to the black layer only.
- ⁽²⁾Dispersion only applies to near spherical agglomerates. 9 of 10 views shall be Category 1 or 2. No more than 1 view from Category 3.
- ⁽³⁾Roll lengths and widths have a tolerance of $\pm 1\%$.
- GSE UltraFlex White Textured is available in rolls weighing approximately 4,000 lb.
- All GSE geomembranes have dimensional stability of $\pm 2\%$ when tested according to ASTM D 1204 and LTB of $< -77^{\circ}\text{C}$ when tested according to ASTM D 746.
- *Modified.



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

TABLE 2.8: GSE ULTRAFLEX LEAK LOCATION TEXTURED GEOMEMBRANE						
Tested Property	Test Method	Frequency	Minimum Average Values			
			40 mil	60 mil	80 mil	100 mil
Thickness, mil Lowest individual reading	ASTM D 5199	every roll	40 36	60 54	80 72	100 90
Density, g/cm ³ (max.)	ASTM D 1505	200,000 lbs	0.939	0.939	0.939	0.939
Tensile Properties (each direction) Strength at Break, lb/in-width Elongation at Break, %	ASTM D 6693, Type IV Dumbbell, 2 ipm G.L. 2.0 in	20,000 lbs	60 250	90 250	120 250	150 250
Tear Resistance, lb	ASTM D 1004	45,000 lbs	22	33	44	55
Puncture Resistance, lb	ASTM D 4833	45,000 lbs	44	66	88	110
Carbon Black Content ⁽¹⁾ , % (Range)	ASTM D 1603*/4218	20,000 lbs	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0
Carbon Black Dispersion	ASTM D 5596	45,000 lbs	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾
Asperity Height, mil	ASTM D 7466	second roll	18	18	18	18
Oxidative Induction Time, min	ASTM D 3895, 200°C; O ₂ , 1 atm	200,000 lbs	>100	>100	>100	>100
Typical Roll Dimensions						
Roll Length ⁽³⁾ , ft	Double-Sided Textured Single-Sided Textured		700 650	520 420	400 320	330 250
Roll Width ⁽³⁾ , ft			22.5	22.5	22.5	22.5
Roll Area, ft ²	Double-Sided Textured Single-Sided Textured		15,750 14,625	11,700 9,450	9,000 7,200	7,425 5,625

- NOTES:
 - ⁽¹⁾GSE UltraFlex Leak Location Textured may have an overall ash content greater than 3.0% due to the conductive layer. These values apply to the non-conductive black layer only.
 - ⁽²⁾Dispersion only applies to near spherical agglomerates. 9 of 10 views shall be Category 1 or 2. No more than 1 view from Category 3.
 - ⁽³⁾Roll lengths and widths have a tolerance of $\pm 1\%$.
 - GSE UltraFlex Leak Location Textured is available in rolls weighing approximately 4,000 lb.
 - All GSE geomembranes have dimensional stability of $\pm 2\%$ when tested according to ASTM D 1204 and LTG of $< -77^{\circ}\text{C}$ when tested according to ASTM D 746.
 - *Modified.



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

TABLE 2.9: GSE ULTRAFLEX LEAK LOCATION WHITE TEXTURED GEOMEMBRANE						
Tested Property	Test Method	Frequency	Minimum Average Values			
			40 mil	60 mil	80 mil	100 mil
Thickness, mil Lowest individual reading	ASTM D 5199	every roll	40 36	60 54	80 72	100 90
Density, g/cm ³ (max.)	ASTM D 1505	200,000 lbs	0.939	0.939	0.939	0.939
Tensile Properties (each direction) Strength at Break, lb/in- width Elongation at Break, %	ASTM D 6693, Type IV Dumbbell, 2 ipm G.L. 2.0 in	20,000 lbs	60 250	90 250	120 250	150 250
Tear Resistance, lb	ASTM D 1004	45,000 lbs	22	33	44	55
Puncture Resistance, lb	ASTM D 4833	45,000 lbs	44	66	88	110
Carbon Black Content ⁽¹⁾ , % (Range)	ASTM D 1603*/4218	20,000 lbs	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0	2.0 - 3.0
Carbon Black Dispersion	ASTM D 5596	45,000 lbs	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾	Note ⁽²⁾
Asperity Height, mil	ASTM D 7466	second roll	18	18	18	18
Oxidative Induction Time, min	ASTM D 3895, 200°C; O ₂ , 1 atm	200,000 lbs	>100	>100	>100	>100
Typical Roll Dimensions						
Roll Length ⁽³⁾ , ft	Double-Sided	Textured	700	520	400	330
	Single-Sided	Textured	650	420	320	250
Roll Width ⁽³⁾ , ft			22.5	22.5	22.5	22.5
Roll Area, ft ²	Double-Sided	Textured	15,750	11,700	9,000	7,425
	Single-Sided	Textured	14,625	9,450	7,200	5,625

• NOTES:

- ⁽¹⁾GSE UltraFlex Leak Location White Textured may have an overall ash content greater than 3.0% due to the white and conductive layers. These values apply to the non-conductive black layer only.
- ⁽²⁾Dispersion only applies to near spherical agglomerates. 9 of 10 views shall be Category 1 or 2. No more than 1 view from Category 3.
- ⁽³⁾Roll lengths and widths have a tolerance of $\pm 1\%$.
- GSE UltraFlex Leak Location White Textured is available in rolls weighing approximately 4,000 lb.
- All GSE geomembranes have dimensional stability of $\pm 2\%$ when tested according to ASTM D 1204 and LTB of $< -77^{\circ}\text{C}$ when tested according to ASTM D 746.
- *Modified.



F. Extrudate Rod or Bead

1. Extrudate material shall be made from same type resin as the geomembrane.
2. Additives shall be thoroughly dispersed.
3. Materials shall be free of contamination by moisture or foreign matter.

1.9 EQUIPMENT

A. Welding equipment and accessories shall meet the following requirements:

1. Gauges showing temperatures in apparatus such as extrusion welder or fusion welder shall be present.
2. An adequate number of welding apparatus shall be available to avoid delaying work.
3. Power source must be capable of providing constant voltage under combined line load.

1.10 DEPLOYMENT

- A. Assign each panel a simple and logical identifying code. The coding system shall be subject to approval and shall be determined at the job site.
- B. Visually inspect the geomembrane during deployment for imperfections and mark faulty or suspect areas.
- C. Deployment of geomembrane panels shall be performed in a manner that will comply with the following guidelines:
1. Geomembranes shall be installed according to site-specific specifications, and GSE Conductive should be installed with the Conductive layer down.
 - i. *Note: A spark tester or ohm meter can be used to determine Conductive layer.*
 2. Unroll geomembrane using methods that will not damage geomembrane and will protect underlying surface from damage (spreader bar, protected equipment bucket).
 3. Place ballast (commonly sandbags) on geomembrane which will not damage geomembrane to prevent wind uplift.
 4. Personnel walking on geomembrane shall not engage in activities or wear shoes that could damage it. Smoking will not be permitted on the geomembrane.
 5. Do not allow heavy vehicular traffic directly on geomembrane. Rubber-tired ATV's and trucks are acceptable if wheel contact is less than 8 psi.
 6. Protect geomembrane in areas of heavy traffic by placing protective cover over the geomembrane.
- D. Sufficient material (slack) shall be provided to allow for thermal expansion and contraction of the material.

1.11 FIELD SEAMING

- A. Seams shall meet the following requirements:



1. To the maximum extent possible, orient seams parallel to the line of the slope, i.e., down and not across slope.
 2. Minimize number of field seams in corners, odd-shaped geometric locations and outside corners.
 3. Slope seams (panels) shall extend a minimum of 5-ft beyond the grade break into the flat area.
 4. Use a sequential seam numbering system compatible with panel numbering system that is agreeable to the CONSULTANT and INSTALLER.
 5. Align seam overlaps consistent with the requirements of the welding equipment being used. A 6-in overlap is commonly suggested.
- B. During Welding Operations
1. Provide at least one Master Seamer who shall provide direct supervision over other welders as necessary.
- C. Extrusion Welding
1. Hot-air tack adjacent pieces together using procedures that do not damage the geomembrane.
 2. Clean geomembrane surfaces by disc grinder or equivalent.
 3. Purge welding apparatus of heat-degraded extrudate before welding.
- D. Hot Wedge Welding
1. Welding apparatus shall be a self-propelled device equipped with an electronic controller which displays applicable temperatures.
 2. Clean seam area of dust, mud, moisture and debris immediately ahead of hot wedge welder.
 3. Protect against moisture build-up between sheets.
- E. Trial Welds
1. Perform trial welds on geomembrane samples to verify welding equipment is operating properly.
 2. Make trial welds under the same surface and environmental conditions as the production welds, i.e., in contact with subgrade and similar ambient temperature.
 3. Minimum of two trial welds per day, per welding apparatus, one made prior to the start of work and one completed at mid shift.
 4. Cut four, one-inch wide by six-inch long test strips from the trial weld.
 5. Quantitatively test specimens for peel adhesion, and then for shear strength.
 6. Trial weld specimens shall pass when the results shown in the following tables for HDPE and LLDPE are achieved in both peel and shear test.



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

•

TABLE 1.12.6A: MINIMUM WELD VALUES FOR HDPE GEOMEMBRANES							
Property	Test Method	30	40	60	80	100	120
Peel Strength (fusion), ppi	ASTM D 6392	49	65	98	130	162	196
Peel Strength (extrusion), ppi	ASTM D 6392	39	52	78	104	130	157
Shear Strength (fusion & ext.), ppi	ASTM D 6392	61	81	121	162	203	242

•

TABLE 1.2.6B: MINIMUM WELD VALUES FOR LLDPE GEOMEMBRANES						
Property	Test Method	30	40	60	80	100
Peel Strength (extrusion), ppi	ASTM D 6392	36	48	72	96	120
Peel Strength (fusion), ppi	ASTM D 6392	38	50	75	100	125
Shear Strength (fusion & ext.), ppi	ASTM D 6392	45	60	90	120	150

7. The break, when peel testing, occurs in the liner material itself, not through peel separation (FTB).
 8. The break is ductile.
 9. Repeat the trial weld, in its entirety, when any of the trial weld samples fail in either peel or shear.
 10. No welding equipment or welder shall be allowed to perform production welds until equipment and welders have successfully completed trial weld.
- F. Seaming shall not proceed when ambient air temperature or adverse weather conditions jeopardize the integrity of the liner installation. INSTALLER shall demonstrate that acceptable seaming can be performed by completing acceptable trial welds.
- G. Defects and Repairs
1. Examine all seams and non-seam areas of the geomembrane for defects, holes, blisters, undispersed raw materials, and any sign of contamination by foreign matter.
 2. Repair and non-destructively test each suspect location in both seam and non-seam areas. Do not cover geomembrane at locations that have been repaired until test results with passing values are available.



1.12 FIELD QUALITY ASSURANCE

- A. MANUFACTURER and INSTALLER shall participate in and conform to all terms and requirements of the Owner's quality assurance program. CONTRACTOR shall be responsible for assuring this participation.
- B. Quality assurance requirements are as specified in this Section and in the Field Installation Quality Assurance Manual if it is included in the contract.
- C. Field Testing
 - 1. Non-destructive testing may be carried out as the seaming progresses or at completion of all field seaming.
 - b. Vacuum Testing
 - 1) Shall be performed in accordance with ASTM D 5641, Standard Practice for Geomembrane Seam Evaluation by Vacuum Chamber.
 - b. Air Pressure Testing
 - 1) Shall be performed in accordance with ASTM D 5820, Standard Practice for Pressurized Air Channel Evaluation of Dual Seamed Geomembranes.
 - c. Spark Testing
 - 1. Shall be performed accordance with ASTM D 7240 Standard Practice for Leak Location using Geomembranes with an Insulating Layer in Intimate Contact with a Conductive Layer via Electrical Capacitance Technique (Conductive Geomembrane Spark Test).
 - d. Other approved methods.
 - 2. Destructive Testing (performed by CONSULTANT with assistance from INSTALLER)
 - b. Location and Frequency of Testing
 - 1) Collect destructive test samples at a frequency of one per every 500 lineal feet of seam length.
 - 2) Test locations will be determined after seaming.
 - 3) Exercise Method of Attributes as described by GRI GM-14 (Geosynthetic Research Institute, <http://www.geosynthetic-institute.org>) to minimize test samples taken.
 - c. Sampling Procedures are performed as follows:
 - 1) INSTALLER shall cut samples at locations designated by the CONSULTANT as the seaming progresses in order to obtain field laboratory test results before the geomembrane is covered.
 - 2) CONSULTANT will number each sample, and the location will be noted on the installation as-built.
 - a) Samples shall be 12-in wide by minimal length with the seam centered lengthwise.
 - b) Cut a 2-in wide strip from each end of the sample for field-testing.
 - c) Cut the remaining sample into two parts for distribution as follows:



- d) One portion for INSTALLER, 12-in by 12-in
 - e) One portion for the Third-Party laboratory, 12-in by 18-in
 - f) Additional samples may be archived if required.
- 3) Destructive testing shall be performed in accordance with ASTM D 6392, Standard Test Method for Determining the Integrity of Non-Reinforced Geomembrane Seams Produced Using Thermo-Fusion Methods.
 - a) INSTALLER shall repair all holes in the geomembrane resulting from destructive sampling.
- 4) Repair and test the continuity of the repair in accordance with these Specifications.
- 3. Failed Seam Procedures
 - a. If the seam fails, INSTALLER shall follow one of two options:
 - 1) Reconstruct the seam between any two passed test locations.
 - 2) Trace the weld to intermediate location at least 10-ft minimum or where the seam ends in both directions from the location of the failed test.
 - b) The next seam welded using the same welding device is required to obtain an additional sample, i.e., if one side of the seam is less than 10-ft long.
 - c) If sample passes, then the seam shall be reconstructed or capped between the test sample locations.
 - d) If any sample fails, the process shall be repeated to establish the zone in which the seam shall be reconstructed.

1.13 REPAIR PROCEDURES

- A. Remove damaged geomembrane and replace with acceptable geomembrane materials if damage cannot be satisfactorily repaired.
- B. Repair any portion of unsatisfactory geomembrane or seam area failing a destructive or non-destructive test.
- C. INSTALLER shall be responsible for repair of defective areas.
- D. Agreement upon the appropriate repair method shall be decided between
 - 1. CONSULTANT and INSTALLER by using one of the following repair methods:
 - a. Patching- Used to repair large holes, tears, undispersed raw materials and contamination by foreign matter.
 - b. Abrading and Re-welding- Used to repair short section of a seam.
 - c. Spot Welding- Used to repair pinholes or other minor, localized flaws or where geomembrane thickness has been reduced.
 - d. Capping- Used to repair long lengths of failed seams.
 - e. Flap Welding- Used to extrusion weld the flap (excess outer portion) of a fusion weld in lieu of a full cap.
 - 1) Remove the unacceptable seam and replace with new material.
- E. The following procedures shall be observed when a repair method is used:
 - 1. All geomembrane surfaces shall be clean and dry at the time of repair.



**MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00**

2. Surfaces of the polyethylene which are to be repaired by extrusion welds shall be lightly abraded to assure cleanliness.
 3. Extend patches or caps at least 6 inches for extrusion welds and 4 inches for wedge welds beyond the edge of the defect, and around all corners of patch material.
- F. Repair Verification
1. Number and log each patch repair (performed by CONSULTANT).
 2. Non-destructively test each repair using methods specified in this Specification.



1.1 SCOPE

This specification covers the technical requirements for the Manufacturing and Installation of the nonwoven geotextile. All materials meet or exceed the requirements of this specification, and all work will be performed in accordance with the procedures provided in these project specifications.

1.2 REFERENCES

A. American Society for Testing and Materials (ASTM)

1. ASTM D 5261, Standard Test Method for Measuring Mass per Unit Area of Geotextiles
2. ASTM D 4632, Standard Test Method for Grab Breaking Load and Elongation of Geotextiles
3. ASTM D 4533, Standard Test Method for Index Trapezoidal Tearing Strength of Geotextiles
4. ASTM D 4833, Standard Test Method for Index Puncture Resistance of Geotextiles, Geomembranes and Related Products
5. ASTM D 4491, Standard Test Method for Water Permeability of Geotextiles by Permittivity
6. ASTM D 4751, Standard Test Method for Determining Apparent Opening Size of a Geotextile
7. ASTM D 4354, Standard Practice for Sampling of Geosynthetics for Testing
8. ASTM D 4759, Standard Practice for Determining the Specifications Conformance of Geosynthetics

1.3 SUBMITTALS

- A. Prior to material delivery to project site, the contractor shall provide the engineer with a written certification or manufacturers quality control data which displays that the geotextile meets or exceeds minimum average roll values (MARV) specified herein.
- B. The contractor shall submit, if required by the engineer, manufacturer's quality control manual for the geotextile to be delivered to the site.

2. PRODUCT

2.1 GEOTEXTILE

- A. The nonwoven needle-punched geotextile specified herein shall be made from staple fiber.
- B. The geotextile shall be manufactured from prime quality virgin polymer.
- C. The geotextile shall be able to withstand direct exposure to ultraviolet radiation from Sun for up to 30 days without any noticeable effect on index or performance properties.
- D. Geotextile shall meet or exceed all material properties listed in *Table 1*.



TABLE 1: GEOTEXTILE PROPERTIES			
Property	Test Method	Test Frequency	Value
Mass per Unit Area, oz/yd ²	ASTM D 5261	90,000-ft ²	12
Grab Tensile Strength, lb	ASTM D 4632	90,000-ft ²	320
CBR Puncture Strength, lb	ASTM D 6241	540,000-ft ²	925
Grab Elongation, %	ASTM D 4632	90,000-ft ²	50
Trapezoidal Tear Strength, lb	ASTM D 4533	90,000-ft ²	125
UV Resistance, % retained after 500 hours	ASTM D 4355	per formulation	70

2.2 MANUFACTURE

- A. All rolls of the geotextile shall be identified with permanent marking on the roll or packaging, with the manufacturers name, product identification, roll number, and roll dimensions.

2.3 TRANSPORT

- A. Transportation of the geotextile shall be the responsibility of the contractor.
- B. During shipment, the geotextile shall be protected from ultraviolet light exposure, precipitation, mud, dirt, dust, puncture, or other damaging or deleterious conditions.
- C. Upon delivery at the job site, the contractor shall ensure that the geotextile rolls are handled and stored in accordance with the manufacturer's instructions as to prevent damage.

3. EXECUTION

3.1 QUALITY ASSURANCE

- A. The engineer shall examine the geotextile rolls upon delivery to the site and report any deviations from project specifications to the contractor.

3.2 INSTALLATION



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

- A. The geotextile shall be handled in such a manner as to ensure that it is not damaged in any way. Should the contractor damage the geotextile to the extent that it is no longer usable as determined by these specifications or by the engineer, the contractor shall replace the geotextile at his own cost.
- B. The geotextile shall be installed to the lines and grades as shown on the contract drawings and as described herein.
- C. The geotextile shall be rolled down the slope in such a manner as to continuously keep the geotextile in tension by self-weight. The geotextile shall be securely anchored in an anchor trench where applicable, or by other approved or specified methods.
- D. In the presence of wind, all geotextiles shall be weighted by sandbags or approved equivalent. Such anchors shall be installed during placement and shall remain in place until replaced with cover material.
- E. The contractor shall take necessary precautions to prevent damage to adjacent or underlying materials during placement of the geotextile. Should damage to such material occur due to the fault of the contractor, the latter shall repair the damaged materials at his own cost and to the satisfaction of the engineer.
- F. During placement of the geotextile, care shall be taken not to entrap soil, stones or excessive moisture that could hamper subsequent seaming of the geotextile as judged by the engineer.
- G. The geotextile shall not be exposed to precipitation prior to being installed and shall not be exposed to direct sunlight for more than 15 days after installation.
- H. The geotextile shall be seamed using heat seaming or stitching methods as recommended by the manufacturer and approved by the engineer. Sewn seams shall be made using polymeric thread with chemical resistance equal to or exceeding that of the geotextile. All sewn seams shall be continuous. Seams shall be oriented down slopes perpendicular to grading contours unless otherwise specified. For heat-seaming, fusion welding techniques recommended by the manufacturer shall be used.
- I. The contractor shall not use heavy equipment to traffic above the geotextile without approved protection.
- J. The geotextile shall be covered as soon as possible after installation and approval. Installed geotextile shall not be left exposed for more than 15 days.
- K. Material overlying the geotextile shall be carefully placed to avoid wrinkling or damage to the geotextile.



SINGLE SIDED GEOCOMPOSITE

1.1 SCOPE

This specification covers the technical requirements for the manufacturing and installation of the geocomposite drainage layer. All materials meet or exceed the requirements of this specification, and all work will be performed in accordance with the procedures provided in these project specifications.

1.2 REFERENCES

A. American Society for Testing and Materials (ASTM)

1. ASTM D 1238 Standard Test Method for Melt Flow Rates of Thermoplastics by Extrusion Plastometer
2. D 1505-98 Standard Test Method for Density of Plastics by the Density-Gradient Technique
3. ASTM D 4218, Standard Test Method for Determination of Carbon Black Content in Polyethylene Compounds by the Muffle Furnace Technique D 1603-94 Standard Test Method for Carbon Black in Olefin Plastics
4. D 4355-02 Standard Test Method for Deterioration of Geotextiles by Exposure to Light, Moisture and Heat in a Xenon Arc Type Apparatus
5. D 4491-99 Standard Test Method for Water Permeability of Geotextiles by Permittivity
6. D4533 Standard Test Method for Trapezoid Tearing Strength of Geotextiles
7. D 4716-00 Standard Test Method for Determining the (In-Plane) Flow Rate Per Unit Width and Hydraulic Transmissivity of a Geosynthetic Using a Constant Head
8. D 4751-99 Standard Test Method for Determining Apparent Opening Size of a Geotextile
9. D 6241 Standard Test Method for the Static Puncture Strength of Geotextiles and Geotextile- Related Products Using a 50-mm Probe D 4833-88 (1996) Standard Test Method for Index Puncture Resistance of Geotextiles, Geomembranes and Related Products
10. D 5261-92 (1996) Standard Test Method for Measuring the Mass Per Unit Area of Geotextiles
11. D7005-03 Determining The Bond Strength (Ply-Adhesion) of Geocomposites
12. D 7179 Standard Test Method for Determining Geonet Breaking Force

B. Relevant publications from the Environmental Protection Agency (EPA):

1. Daniel, D.E. and R.M. Koerner, (1993), Technical Guidance Document: Quality Assurance and Quality Control for Waste Containment Facilities, EPA/600/R-93/182.



1.3 DEFINITIONS

- A. Construction Quality Assurance Consultant (CONSULTANT) – The Party, independent from MANUFACTURER and INSTALLER, that is responsible for observing and documenting activities related to quality assurance during the lining system construction.
- B. ENGINEER - The individual or firm responsible for the design and preparation of the project's Contract Drawings and Specifications.
- C. Geocomposite Manufacturer (MANUFACTURER) - The party responsible for manufacturing the geocomposite rolls.
- D. Geosynthetic Quality Assurance Laboratory (TESTING LABORATORY) -The Party, independent from the MANUFACTURER and INSTALLER, responsible for conducting laboratory tests on samples of geosynthetics obtained at the site or during manufacturing, usually under the direction of the OWNER.
- E. INSTALLER- Party responsible for field handling, transporting, storing and deploying the geocomposite.
- F. Lot- A quantity of resin (usually the capacity of one rail car) used to manufacture polyethylene geocomposite rolls. The finished rolls will be identified by a roll number traceable to the resin lot.

1.4 QUALIFICATIONS

- A. MANUFACTURER
 - 1. Geocomposite shall be manufactured by the following:
 - a. GSE Lining Technology, Inc.
 - b. Approved Equal
 - 2. MANUFACTURER shall have manufactured a minimum of 10,000,000-ft² of polyethylene geocomposite material during the last year.
- B. INSTALLER
 - 1. INSTALLER shall have installed a minimum of 500,000 square feet of geocomposite in the last 3 years.
 - 2. INSTALLER shall have worked in a similar capacity on at least 5 projects similar in complexity to the project described in the contract documents, and within at least 50,000 square feet of geonet installation on each project.
 - 3. The Installation Supervisor shall have worked in a similar capacity on projects similar in size and complexity to the project described in the Contract Documents.

1.5 MATERIAL LABELING, DELIVERY, STORAGE AND HANDLING

- A. Labeling- Each roll delivered to the site shall be wrapped and labeled by the MANUFACTURER. The label will identify:
 - 1. Manufacturer's name
 - 2. Product identification
 - 3. Length
 - 4. Width



- 5. Roll number
- C. Delivery- Rolls will be prepared to ship by appropriate means to prevent damage to the material and to facilitate off-loading.
- D. Storage- The on-site storage location provided by the CONTRACTOR to protect the geonet from abrasions, excessive dirt and moisture, shall have the following characteristics:
 - 1. Level (no wooden pallets)
 - 2. Smooth
 - 3. Dry
 - 4. Protected from theft and vandalism
 - 5. Adjacent to the area being lined
- E. Handling
 - 1. The CONTRACTOR and INSTALLER shall handle all rolls in such a manner to ensure they are not damaged in any way.
 - 2. The INSTALLER shall take any necessary precautions to prevent damage to underlying layers during placement of the drainage material.

1.6 WARRANTY

- A. Material shall be warranted, on a pro-rata basis against defects for a period of 1-year from the date of the geocomposite installation.
- B. Installation shall be warranted against defects in workmanship for a period of 1-year from the date of geocomposite completion.

2. PRODUCTS

2.1 GEOCOMPOSITE PROPERTIES

- A. A geocomposite shall be manufactured by extruding two crossing strands to form a bi-planar drainage net structure with a non-woven geotextile bonded to one or both sides.
- B. The geocomposite specified shall have properties that meet or exceed the values listed in the following data sheets below.



MATERIAL SPECIFICATIONS
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

TABLE 1: GEOCOMPOSITE PROPERTIES			
Property	Test Method	Frequency	Value
Geocomposite			
Transmissivity (1), gal/min/ft (m ² /sec) Single-Sided Composite	ASTM D 4716	1/540,000-ft ²	6.2 (1.3 x 10 ⁻³)
Ply Adhesion, lb/in	ASTM D 7005	1/50,000-ft ²	0.5
Geonet			
Geonet Core Thickness, mil (1)	ASTM D 5199	1/50,000-ft ²	270
Transmissivity (2), gal/min/ft (m ² /sec)	ASTM D 4716	1/540,000-ft ²	19 (4 x 10 ⁻³)
Compressive Strength, lbs/ft	ASTM D 6364	1/540,000-ft ²	40,000
Density, g/cm ³	ASTM D 1505	1/50,000-ft ²	0.94
Tensile Strength (MD), lb/in	ASTM D 7179	1/50,000-ft ²	100
Carbon Black Content, %	ASTM D 4218	1/50,000-ft ²	2.0
8 oz. Geotextile (prior to lamination)			
Mass per Unit Area, oz/yd ²	ASTM D 5261	1/90,000-ft ²	8
Grab Tensile Strength, lb	ASTM D 4632	1/90,000-ft ²	220
Grab Elongation	ASTM D 4632	1/90,000-ft ²	50%
CBR Puncture Strength, lb	ASTM D 6241	1/540,000-ft ²	575
Trapezoidal Tear Strength, lb	ASTM D 4533	1/90,000-ft ²	90
AOS, US Sieve (mm)	ASTM D 4751	1/540,000-ft ²	80 (0.180)
Permittivity, sec-1	ASTM D 4491	1/540,000-ft ²	1.3
Water Flow Rate, gpm/ft ²	ASTM D 4491	1/540,000-ft ²	95
UV Resistance, % Retained	ASTM D 4355 (after 500 hours)	per formulation	70

- *Note: The design engineer shall prepare the table above based on the GSE product data sheet and then delete this note*



C. Resin

1. Resin shall be new first quality, compounded polyethylene resin.
2. Natural resin (without carbon black) shall meet the following additional
 - a. minimum requirements:

TABLE 2: RAW MATERIAL PROPERTIES		
Property	Test Method ⁽¹⁾	Value
Density (g/cm ³)	ASTM D 1505	>0.94
Melt Flow Index (g/10 min)	ASTM D 1238	≤ 1.0

¹GSE utilizes test equipment and procedures that enable effective and economical confirmation that the product will conform to specifications based on the noted procedures. Some test procedures have been modified for application to geosynthetics. All procedures and values are subject to change without prior notification.

2.2 MANUFACTURING QUALITY CONTROL

The geocomposite shall be manufactured in accordance with the Manufacturer's Quality Control Plan submitted to and approved by the ENGINEER.

The geocomposite shall be tested according to the test methods and frequencies listed on Table 1 which has been prepared based on product data sheets.

3. EXECUTION

3.1 FAMILIARIZATION

A. Inspection

1. Prior to implementing any of the work in the Section to be lined, the INSTALLER shall carefully inspect the installed work of all other Sections and verify that all Work is complete to the point where the installation of the Section may properly commence without adverse impact.
2. If the INSTALLER has any concerns regarding the installed work of other Sections, he shall notify the Project ENGINEER.

3.2 MATERIAL PLACEMENT

- A. The geocomposite roll should be installed in the direction of the slope and in the intended direction of flow unless otherwise specified by the ENGINEER.
 1. If the project contains long, steep slopes, special care should be taken so that only full length rolls are used at the top of the slope.



- B. In the presence of wind, all geocomposites shall be weighted down with sandbags or the equivalent. Such sandbags shall be used during placement and remain until replaced with cover material.
- C. If the project includes an anchor trench at the top of the slopes, the geocomposite shall be properly anchored to resist sliding. Anchor trench compacting equipment shall not come into direct contact with the geocomposite.
- D. In applying fill material, no equipment can drive directly across the geocomposite. The specified fill material shall be placed and spread utilizing vehicles with a low ground pressure.
- E. The cover soil shall be placed in the geocomposite in a manner that prevents damage to the geocomposite. Placement of the cover soil shall proceed immediately following the placement and inspection of the geocomposite.

3.3 SEAMS AND OVERLAPS

- A. Each component of the geocomposite will be secured or seamed to the like component at overlaps.
- B. Geonet Components
 - 1. Adjacent edges of the geonet along the length of the geocomposite roll shall be placed with the edges of each geonet butted against each other.
 - 2. The overlaps shall be joined by tying the geonet structure with cable ties. These ties shall be spaced every 5-ft along the roll length.
 - 3. Adjoining geocomposite rolls (end to end) across the roll width should be shingled down in the direction of the slope, with the geonet portion of the top overlapping the geonet portion of the bottom geocomposite a minimum of 12-in across the roll width.
 - 4. The geonet portion should be tied every 6-in in the anchor trench or as specified by the ENGINEER.

3.4 REPAIR

- A. Prior to covering the deployed geocomposite, each roll shall be inspected for damage resulting from construction.
- B. Any rips, tears or damaged areas on the deployed geocomposite shall be removed and patched. The patch shall be secured to the original geonet by tying every 6-in with the approved tying devices. If the area to be repaired is more than 50 percent of the width of the panel, the damaged area shall be cut out and the two portions of the geonet shall be cut out and the two portions of the geonet shall be joined in accordance with *Subsection 3.03*.



C147 MODIFICATION SUBMITTAL
RAPTOR RECYCLE FACILITY
SECTION 19, TOWNSHIP 18 SOUTH, RANGE 34 EAST
LEA COUNTY, NEW MEXICO
024251-00

APPENDIX G

UPDATED OPERATIONS & MAINTENANCE PLAN



Select Water Solutions, LLC is proposing to construct five (5) storage containments and a treatment pad with a Above Ground Storage Tank (AST) in Section 19, Township 18 South, Range 34 East, Lea County, New Mexico. Raptor Recycle shall consist of six (6) containments with a total operational volume of approximately 3,143,651-bbl.

OPERATION AND MAINTENANCE PROCEDURES

Applicable mandates in Rule 34 are underlined. This plan addresses construction of lined earthen containments and an above ground storage tank. Pilot intends to operate the AST's the same way as an earthen containment. *Appendix C* presents Engineering Design Plans. *Appendix E* provides liner and geotextile specifications.

Field conditions may create the need for minor modification of the containment design (e.g. changing the length, width, or depth.)

Dike Protection and Structural Integrity

Design elements are addressed in the section of this submission containing the foundation recommendations. The recommendations are based on site-specific data. The operator, engineer, and selected contractor will review the recommendations prior to beginning the earthwork and adhere to the specific recommendations.

The design and operation provide for the confinement of produced water to prevent releases and to prevent overtopping due to wave action or rainfall. Additionally, the design prevents run-on of surface water as the containment is surrounded by an above-grade levee (berm) and diversion ditch to prevent run-on of surface water.

Stockpile Topsoil

Where topsoil is present, prior to constructing containment, the operator will strip and stockpile the topsoil for use as the final cover or fill at the time of closure. The topsoil will be stockpiled adjacent to perimeter fence surrounding the containment or incorporated into the levee.

Signage

The design calls for an upright sign no less than 12-in by 24-in with lettering not less than two inches in height in a conspicuous place on the fence surrounding the containment. The sign is posted in a manner and location such that a person can easily read the legend. The sign will provide the following information:

1. The operator's name,
2. The location of the site by quarter-quarter or unit letter, section, township and range, and
3. Emergency telephone numbers.



Fencing

The design provides for a fence to enclose the Recycling Containment in a manner that deters unauthorized wildlife and human access. The design calls for a 8-ft tall wire mesh game fence around the containment to exclude wildlife (see detail contained in engineering design drawings). This fence provides greater wildlife (and human) deterrence than the minimum required barbed wire fence with four strands evenly spaced in the interval between one foot and four feet above ground level. The fence will be gated to provide access for maintenance and placement of pumps and other necessary equipment. As stated in the O&M plan, the operator will ensure that all gates associated with the fence are closed and locked when responsible personnel are not onsite.

Netting and Protection of Wildlife

The game fence around the containment will be effective in excluding antelope, deer, coyotes, and most other terrestrial wildlife.

The Recycling Containment is otherwise protective of wildlife, including migratory birds. The containment will contain treated produced water that has not shown to be a material threat to birds due to hydrogen sulfide gas or floating, free-phase hydrocarbons. The O&M plan calls for the operator to inspect for and, within 30 days of discovery, report the discovery of dead migratory birds or other wildlife to the appropriate wildlife agency and to the division district office in order to facilitate assessment and implementation of measures to prevent incidents from reoccurring.

The containment will have a properly constructed foundation and interior slopes consisting of a firm, unyielding base, smooth and free of rocks, debris, sharp edges or irregularities to prevent the liner's rupture or tear. Geotextile may be placed under the liner when needed to reduce localized stress-strain or protuberances that otherwise may compromise the liner's integrity.

Appendix C shows for earthen containments;

1. The levee has an inside grade no steeper than three horizontal feet to one vertical foot (3H:1V).
2. The levee outside grade is no steeper than three horizontal feet to one vertical foot (3H:1V).
3. The top of the levee is wide enough to install an anchor trench and provide adequate room for inspection and maintenance.
4. The caliche gravel placed on the outside levee provides additional erosion control.

Field conditions may create the need for changes to the design. Any changes to the construction or grade requirements due to unforeseen conditions will be reviewed and approved prior to initiating installation of the liner system. Any design change that does not conform to the NMOCD Rule will be the subject of a variance request and will be submitted **to the OCD for review and approval**.



LINER AND DRAINAGE GEOTEXTILE INSTALLATION

The containment has a primary (upper) liner and a secondary (lower) liner with a leak detection system appropriate to the site's conditions.

The primary (upper) liner is a geomembrane liner composed of an impervious, synthetic material that is resistant to ultraviolet light, petroleum hydrocarbons, salts and acidic and alkaline solutions. It is 60-mil HDPE. The secondary liner is 40-mil HDPE. Liner compatibility meets or exceeds a subsequent relevant publication to EPA SW-846 method 9090A.

The Recycling Containment design has a leak detection system between the upper and lower geomembrane liners of 200-mil geonet to facilitate drainage. The leak detection system consists of a properly designed drainage and collection and removal system placed above the lower geomembrane liner in depressions and sloped to facilitate the earliest possible leak detection. The containment floor design calls for a slope toward the sump. This slope, combined with the highly transmissive geonet drainage layer, provides for the earliest possible leak detection.

The liners and drainage material will be installed consistent with the manufacture's specifications (See *Appendix E*). In addition to any specifications of the manufacturer, protocols for liner installation include measures to:

1. Minimize liner seams and orient them up and down, not across, a slope of the levee.
2. Use factory welded seams where possible.
3. Field seams in geosynthetic material are thermally seamed; prior to field seaming, overlap liner four to six inches.
4. Minimize the number of field seams and corners and irregularly shaped areas.
5. Provide for no horizontal seams within five feet of the slope's toe.
6. Use qualified personnel to perform field welding and testing.
7. Avoid excessive stress-strain on the liner.
8. The edges of all liners are anchored in the bottom of a compacted earth-filled trench that is at least 18-in deep.

At points of discharge into the lined earthen containment, the pipe configuration effectively protects the liner from excessive hydrostatic force or mechanical damage during filling. The design shows that at any point of discharge into or suction from the recycling containment, the liner is protected from excessive hydrostatic force or mechanical damage. External discharge or suction lines do not penetrate the liner.

Pumping from the containment to hydraulic fracturing operations is the responsibility of stimulation contractors. Typically, numerous lines are permanently placed in the containment with floats attached to prevent damage to the liner system. The containment may be equipped with permanent HDPE stinger (supported by a sacrificial liner or geotextile) for withdrawal of fluid during operations, if the owner deems necessary. External discharge or suction lines do not penetrate the liner.



LEAK DETECTION AND FLUID REMOVAL SYSTEM INSTALLATION

The leak detection system, contains the following design elements:

1. The 200-mil geonet drainage material between the primary and secondary liner is sufficiently permeable to allow the transport of fluids to the observation ports (*Appendix C*).
2. The containment floor, sloped towards the monitoring riser pipe, facilitates the earliest possible leak detection of the containment bottom. A pump may be placed in an observation port to provide for fluid removal.
3. Piping will withstand chemical attack from any seepage, structural loading from stresses and disturbances from overlying water, cover materials, equipment operation, and expansion or contraction (see *Appendix C*).
4. The slope of the interior subgrade should be great enough to facilitate drainage.



C147 MODIFICATION SUBMITTAL
RAPTOR RECYCLE FACILITY
SECTION 19, TOWNSHIP 18 SOUTH, RANGE 34 EAST
LEA COUNTY, NEW MEXICO
024251-00

APPENDIX I

UPDATED CLOSURE PLAN & COST ESTIMATE



CLOSURE PLAN
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

Select Water Solutions, LLC is proposing to construct five (5) storage containments and a treatment pad with a Above Ground Storage Tank (AST) in Section 19, Township 18 South, Range 34 East, Lea County, New Mexico. Raptor Recycle shall consist of six (6) containments with a total operational volume of approximately 3,143,651-bbl.

CLOSURE PLAN

In this plan, underlined text represents the language of the Rule.

After operations cease, the operator will remove all fluids within 60 days and close the containment within six months from the date the operator ceases operations from the containment for use.

The operator shall substantially restore the impacted surface area to

1. The condition that existed prior to the construction of the recycling containment or
2. To a condition imposed by federal, state trust land, or tribal agencies on lands managed by those agencies as these provisions govern the obligations of any operator subject to those provisions.

EXCAVATION AND REMOVAL CLOSURE PLAN - PROTOCOLS AND PROCEDURES

The storage pits and AST are expected to contain a small volume of solids, the majority of which will be windblown sand and dust with some mineral precipitates from the water.

The operator will remove all liquids from the pits and either:

1. Dispose of the liquids in a division-approved facility, or
2. Recycle, reuse, or reclaim the water for reuse in drilling and stimulation

The operator will close the recycling containment by first removing all fluids, contents, and synthetic liners and transferring these materials to a Division approved facility.

After the removal of the pit contents and liners, soils beneath the pit will be tested by collection of a five-point (minimum) composite sample, which includes stained or wet soils, if any. That sample shall be analyzed for the constituents listed in Table 1 of 19.15.34.14.

After review of the laboratory results:

1. If any contaminant concentration is higher than the parameters listed in Table 1, additional delineation may be required, and the operator must receive approval before proceeding with closure.
2. If all contaminant concentrations are less than or equal to the parameters listed in Table 1, then the operator will proceed to:

Backfill with non-waste containing, uncontaminated earthen material or

Undertake an alternative closure process pursuant to a variance request after approval by OCD.

The operator will reclaim the containment's location to a safe and stable condition that blends with the surrounding undisturbed area.

Topsoils and subsoils shall be replaced to their original relative positions and contoured so as to achieve erosion control, long-term stability, and preservation of surface water flow patterns.

The disturbed area shall then be reseeded in the first favorable growing season following closure of a recycling containment.

CLOSURE DOCUMENTATION

Within 60 days of closure completion, the operator shall submit a closure report on Form C-147, including required attachments, to document all closure activities including sampling results and the details on any backfilling, capping or covering, where applicable. The closure report shall certify that



CLOSURE PLAN
SELECT WATER SOLUTIONS, LLC
RAPTOR RECYCLE CONTAINMENT
LEA COUNTY, NEW MEXICO
024151-00

all information in the report and attachments is correct and that the operator has complied with all applicable closure requirements and conditions specified in division rules or directives.
The operator shall notify the division when reclamation and re-vegetation are complete. Specifically, the notice will document that all ground surface disturbing activities at the site have been completed, and a uniform vegetative cover has been established that reflects a life-form ratio of plus or minus fifty percent (50%) of pre-disturbance levels and a total percent plant cover of at least seventy percent (70%) of pre-disturbance levels, excluding noxious weeds.

Select Water Solutions Raptor Recycle Facility Closure Cost Estimate

Item	Units	Quantity	\$/Unit	Estimate Cost
Facility Closure				
1 Fluid removal				
Raptor Recycle North Containment (994K bbls)	bbls	994,275	\$ 0.50	\$ 497,137.50
Raptor Recycle East Containment (994K bbls)	bbls	994,275	\$ 0.50	\$ 497,137.50
Raptor Recycle West Containment (994K bbls)	bbls	994,275	\$ 0.50	\$ 497,137.50
Raptor Recycle East Treatment Containment (50K bbls)	bbls	50,413	\$ 0.50	\$ 25,206.50
Raptor Recycle West Treatment Containment (50K bbls)	bbls	50,413	\$ 0.50	\$ 25,206.50
Raptor Recycle Above Ground Storage Tank (60K bbls)	bbls	60,000	\$ 0.50	\$ 30,000.00
2 Vac truck (final fluid removal)	hrs	80	\$ 125.00	\$ 10,000.00
3 Liner removal (fold-in-place)				
North Containment cover removal and disposal	SF	1,731,988	\$ 0.18	\$ 311,757.84
East/West Containments cover removal and disposal	SF	3,837,568	\$ 0.18	\$ 690,762.24
4 Equipment removal				
Pit clean-out and residue haul-off	LS	1	\$ 20,000.00	\$ 20,000.00
Equipment removal (tanks, gun barrel, FWKO)	LS	1	\$ 7,500.00	\$ 7,500.00
Electrical decommissioning (pumps and panels)	LS	1	\$ 10,000.00	\$ 10,000.00
Misc equipment clean-up and removal	hr	200	\$ 135.00	\$ 27,000.00
Removal of AST	LS	1	\$ 75,000.00	\$ 75,000.00
5 Site Restoration				
North Containment	CY	129,589	\$ 5.00	\$ 647,945.00
East/West Containments	CY	321,544	\$ 5.00	\$ 1,607,720.00
Dozer - push in berms (bid) and final grading of the site				
Re-vegetation	ea	1	\$ 7,500.00	\$ 7,500.00
Estimated Total				\$ 4,987,010.58

Assumptions

No Remediation will be necessary

Pit is full at time of closure

Pit berms above natural grade will be used to fill voids below natural grade



8-13-2024

Venegas, Victoria, EMNRD

From: Venegas, Victoria, EMNRD
Sent: Wednesday, August 28, 2024 11:52 AM
To: Timsan Bricker; Mitchell Ratke
Subject: 1RF-524 - RAPTOR RECYCLING FACILITY [fVV2414453856]
Attachments: C-147 1RF-524 - RAPTOR RECYCLING FACILITY [fVV2414453856] Modification 08.28.2024.pdf

1RF-524 - RAPTOR RECYCLING FACILITY [fVV2414453856]

Good morning Ms. Bricker.

NMOCD has reviewed the recycling containment permit modification and related documents, submitted by [289068] SELECT WATER SOLUTIONS, LLC on August 23, 2024, Application ID 376907, for 1RF-524 - RAPTOR RECYCLING FACILITY [fVV2414453856] in Unit Letter O, Section 19, Township 18S, Range 34E, Lea County, New Mexico. [289068] SELECT WATER SOLUTIONS, LLC requested the following modifications to the permit 1RF-524 - RAPTOR RECYCLING FACILITY [fVV2414453856].

- A modification to add an 8-inch DR11 Solid HDPE suction pipe in the same trench as the leak detection pipe. The purpose of adding the effluent suction pipe is to enable faster drainage of the containment in the event of a significant leak within the primary liner. The modification has been approved.
- A modification to add 60K-bbl. Above Ground Storage Tank (AST) to the facility. The modification has been approved

[289068] SELECT WATER SOLUTIONS, LLC requested variances from 19.15.34 NMAC for 1RF-524 - RAPTOR RECYCLING FACILITY [fVV2414453856], specific to the AST. The following variances have been approved:

- The variance to 19.15.34.12.A.(3) NMAC for the liners to be anchored to the top of the ASTs steel walls and no anchor trenches is approved.
- The variance to 19.15.34.12.A.(2) NMAC for the no side-slope requirement for the AST containments with vertical walls is approved.
- The variance to 19.15.34.12.A.(4) NMAC for the installation on the AST containment of a 40-mil non-reinforced LLDPE primary liner is approved. The variance to 19.15.34.12.A.(4) NMAC for the installation on the AST containment of a 40-mil non-reinforced LLDPE secondary liner is approved. The proposed new liner system cross-section for the ASTs is as follows: prepare subgrade, 10 oz. geotextile, 40-mil LLDPE primary liner, 200-mil geonet, 40-mil LLDPE secondary liner.

The form C-147 and related documents for 1RF-524 - RAPTOR RECYCLING FACILITY [fVV2414453856] is approved with the following conditions of approval:

- 1RF-524 - RAPTOR RECYCLING FACILITY [fVV2414453856] consists of three inground containments, each with a capacity of 994,275.00 barrels, two (2) inground containments with a capacity of 50,413.00 barrels each, and one (1) AST containment with a capacity of 60,000.00 bbl.
- The total fluid capacity of 1RF-524 - RAPTOR RECYCLING FACILITY [fVV2414453856] is 3,143,651.00 barrels.
- The total closure cost estimated provided in the modification request in the amount of \$4,987,010.58, meets the requirements of NMAC 19.15.34.15.A. The financial assurance should be mailed to the Oil Conservation Division, Administration and Compliance Bureau, 1220 South St Frances Drive; Santa Fe, NM 87505.

- [289068] SELECT WATER SOLUTIONS, LLC will comply with all conditions previously approved for the 1RF-524 - RAPTOR RECYCLING FACILITY [fVV2414453856] permit. The updates to the Design and Construction Plan, Construction and Maintenance Plan, Closure Cost and Closure Plan, included in this Modification request have been approved.
- [289068] SELECT WATER SOLUTIONS, LLC shall comply with 19.15.29 NMAC Releases in the event of any release of produced water or other oil field waste at 1RF-524 - RAPTOR RECYCLING FACILITY [fVV2414453856].

Please let me know if you have any additional questions.

Regards,

Victoria Venegas • Environmental Specialist
Environmental Bureau
EMNRD - Oil Conservation Division
506 W. Texas Ave. Artesia, NM 88210
(575) 909-0269 | Victoria.Venegas@emnrd.nm.gov
<https://www.emnrd.nm.gov/oed/>



District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico

Energy, Minerals and Natural Resources

Oil Conservation Division

1220 S. St Francis Dr.

Santa Fe, NM 87505

CONDITIONS

Action 376907

CONDITIONS

Operator: SELECT WATER SOLUTIONS, LLC 1820 N I-35 Gainesville, TX 76240	OGRID: 289068
	Action Number: 376907
	Action Type: [C-147] Water Recycle Long (C-147L)

CONDITIONS

Created By	Condition	Condition Date
vvenegas	• A modification to add an 8-inch DR11 Solid HDPE suction pipe in the same trench as the leak detection pipe. The purpose of adding the effluent suction pipe is to enable faster drainage of the containment in the event of a significant leak within the primary liner. The modification has been approved. • A modification to add 60K-bbl. Above Ground Storage Tank (AST) to the facility. The modification has been approved. • [289068] SELECT WATER SOLUTIONS, LLC will comply with all conditions previously approved for the 1RF-524 - RAPTOR RECYCLING FACILITY [fVV2414453856] permit. The updates to the Desing and Construction Plan, Construction and Maintenance Plan, Closure Cost and Closure Plan, included in this Modification request have been approved. • [289068] SELECT WATER SOLUTIONS, LLC shall comply with 19.15.29 NMAC Releases in the event of any release of produced water or other oil field waste at 1RF-524 - RAPTOR RECYCLING FACILITY [fVV2414453856].	8/28/2024