<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

Phone:(575) 393-6161 Fax:(575) 393-0720 <u>District II</u>:
311 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 <u>District III</u>:
1000 Rio Brazos Rd., Azteo, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170 <u>District IV</u>:
1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico **Energy, Minerals and Natural Resources** Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

Form C-101 August 1, 2011

Permit 211877

APPLICATION FOR PERMIT TO DRILL	RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

Operator Name		N/O							2.0	OGRID Number	
	RESOURCES I	NC								7377	
	Box 2267 and, TX 79702								3. /	API Number 30-025-42894	
			E Door of Norman						0.1	Vell No.	
4. Property Code 3153			5. Property Name BOYSEN	BERRY 2 STA	TE				0. 1	702H	
	20			WC	7. Surf	ace Location	200		100		120-
UL - Lot M	Section 2	Township 20	Range 3	Lot Idr	M	Feet From 200	N/S Line	S	Feet From 330	E/W Line W	County
	8			8. Pro	posed B	ottom Hole Loca	tion		4	100	400
UL - Lot	Section	Township	Range	Lot Idn		Feet From	N/S Line		Feet From	E/W Line	County
D	2	20		5E	D	230		N	330	W	Le
					9. Poo	Information					
PEARL;WOLF	CAMP, SOUTH									49870	
				Δι	dditional	Well Information	1				
11. Work Type New	Well	12. Well Ty	pe OIL	13. Cable/Rot			4. Lease Type State		15. Ground	d Level Elevation 3671	
16. Multiple N		17. Propos	ed Depth 16043	18. Formation W	olfcamp	1	9. Contractor		20. Spud I	Date 12/1/2015	
Depth to Ground	water	-10		Distance from	nearest fre	esh water well			Distance to	o nearest surface water	

21 Pron	osed Casin	ng and Cen	nent Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	14.75	10.75	40.5	1915	650	0
Int1	9.875	7.625	29.7	10000	1315	0
Prod	6.75	5.5	17	16043	625	9500

Casing/Cement Program: Additional Comments

22	Droposod	Dlowout	Prevention	Drogram

22. Floposed blowood Flevention Flogram						
Type	Working Pressure	Test Pressure	Manufacturer			
Double Ram	10000	5000				

knowledge and b	I have complied with 19.15.14.9 (A) N			OIL CONSEI	RVATION DIVISION
Printed Name:	Electronically filed by Stan Wagner	1	Approved By:	Paul Kautz	
Title:	Regulatory Analyst	Regulatory Analyst		Geologist	
Email Address:	Stan_Wagner@eogresources.com		Approved Date:	10/26/2015	Expiration Date: 10/26/2017
Date:	10/26/2015	Phone: 432-686-3689	Conditions of Appr	roval Attached	•

District I

1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 District III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170 District IV

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico **Energy, Minerals and Natural Resources** Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

Form C-102 August 1, 2011

WELL LOCATION AND ACREAGE DEDICATION PLAT

1. API Number 30-025-42894	2. Pool Code 49870	3. Pool Name PEARL;WOLFCAMP, SOUTH
4. Property Code	5. Property Name	6. Well No.
315321	BOYSENBERRY 2 STATE	702H
7. OGRID No.	8. Operator Name	9. Elevation
7377	EOG RESOURCES INC	3671


10. Surface Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
M	2	20S	35E	M	200	S	330	W	Lea

11. Bottom Hole Location If Different From Surface

UL - Lot D	Section 2	Township 20S	Range 35E	Lot Idn	Feet From 230	N/S Line N	Feet From 330	E/W Line W	County Lea
12. Dedicated Acre 160 62			13. Joint or Infill		14. Consolidation Code	=		15. Order No.	34

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

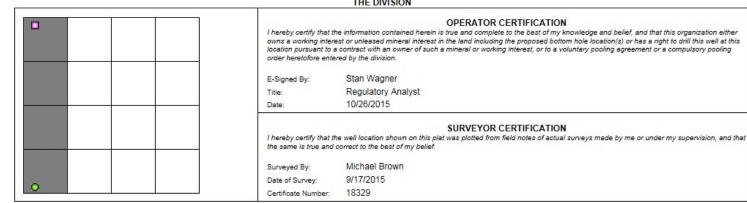

Form APD Comments

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720 Phone:(575) 393-6161 Fax:(575) 393-0720 <u>District II</u> 311 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 <u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170 <u>District IV</u> 1220 S. St Francis Dr., Santa Fe. NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico **Energy, Minerals and Natural Resources** Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

Permit 211877

PERMIT COMMENTS

Operator Name and Address:	API Number:
EOG RESOURCES INC [7377]	30-025-42894
P.O. Box 2267	Well:
Midland, TX 79702	BOYSENBERRY 2 STATE #702H

Created By Comment Oate	Created By	Comment	Comment Date
-------------------------	------------	---------	--------------

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Frencis Dr., Santa Fe. NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

Permit 211877

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address:	API Number:
EOG RESOURCES INC [7377]	30-025-42894
P.O. Box 2267	Well:
Midland, TX 79702	BOYSENBERRY 2 STATE #702H

OCD Reviewer	Condition
pkautz	Will require a directional survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
pkautz	If using a pit for drilling and completion operations, must have an approved pit from prior to spudding the well.
pkautz	1) SURFACE & INTERNEMIATE CASING - Cement must circulate to surface 2) PRODUCTION CASING - Cement must tie back into intermediate casing
pkautz	If cement does not circulate to surface, must run temperature survey or other log to determine top of cement
pkautz	Surface casing must be set 25' below top of Rustler Anhydrite in order to seal off protectable water
pkautz	Must notify OCD Hobbs Office if lost circulation is encountered at 575-370-3186
pkautz	1) Must notify OCD Hobbs Office prior to running Stage Tool at 575-370-3186 2) If using Stage Tool on Surface casing, Stage Tool must be set greater than 350' from surface and a minimum of 200 feet above surface shoe. 3) When using a Stage Tool on Intermediate or Production Casing Stage must be a minimum of 50 feet below previous casing shoe.