Form 3160-3 (June 2015)	PPG		OMB N	APPROVED Jo. 1004-0137 anuary 31, 2018
UNITED STAT DEPARTMENT OF THE BUREAU OF LAND MA	E INTERIOR		5. Lease Serial No.	
APPLICATION FOR PERMIT TO			6. If Indian, Allotee	e or Tribe Name
			7 If Unit or CA As	reamont Name and No
1a. Type of work: DRILL	REENTER		7. If Unit of CA Ag	greement, Name and No.
1b. Type of Well: Oil Well Gas Well 1c. Type of Completion: Hydraulic Fracturing	Other Single Zone	Multiple Zone	8. Lease Name and	Well No.
Te. Type of Completion.	Shight Zone	Withtiple Zone	I	[331336]
2. Name of Operator [260297]			9. API Well No.	30-025-49302
3a. Address	3b. Phone 1	No. (include area code)	10. Field and Pool,	or Exploratory [51020]
4. Location of Well (Report location clearly and in accordance	ce with any State	e requirements.*)	11. Sec., T. R. M. o	or Blk. and Survey or Area
At surface				
At proposed prod. zone			10.00	1
14. Distance in miles and direction from nearest town or post	office*		12. County or Paris	sh 13. State
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)	16. No of a	cres in lease 17. S	pacing Unit dedicated to	this well
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.	19. Propose	ed Depth 20. E	BLM/BIA Bond No. in file	;
21. Elevations (Show whether DF, KDB, RT, GL, etc.)	22. Approx	imate date work will start*	23. Estimated durar	tion
	24. Attac	chments		
The following, completed in accordance with the requirement (as applicable)	s of Onshore Oil	l and Gas Order No. 1, and	the Hydraulic Fracturing	rule per 43 CFR 3162.3-3
Well plat certified by a registered surveyor.		_	rations unless covered by a	an existing bond on file (see
2. A Drilling Plan.3. A Surface Use Plan (if the location is on National Forest Sy SUPO must be filed with the appropriate Forest Service Off			information and/or plans a	s may be requested by the
25. Signature	Name	e (Printed/Typed)		Date
Title				
Approved by (Signature)	Name	e (Printed/Typed)		Date
Title	Office			
Application approval does not warrant or certify that the appli applicant to conduct operations thereon. Conditions of approval, if any, are attached.	cant holds legal	or equitable title to those ri	ghts in the subject lease v	which would entitle the
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212 of the United States any false, fictitious or fraudulent statemen				any department or agency
NGMP Rec 08/09/2021				<u> </u>
		- TITA	08	3/11/2021
SL	oven W	TH CONDITION		
(Continued on page 2)	OARD W.		*(Ir	nstructions on page 2)

Released to Imaging: 8/11/2021 3:09:28 PM Approval Date: 05/26/2021

DISTRICT I 1625 N French Dr , Hobbs, NM 88240 Phone (575) 393-6161 Fax: (575) 393-0720

DISTRICT II 811 S First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720 DISTRICT III

(Mit Rio Brazos Road, Aztec, NM 87410 Phone: (505) 334-6178 Fax: (505) 334-6170 DISTRICT IV

DISTRICT IV 1220 S St. Francis Dr., Santa Fe. NM 87505 Phone: (505) 476-3460 Fax: (505) 476-3462 State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office

□AMENDED REPORT

Ronald J. Eidson

JWSC W O 20 11 0298

3239


WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number	Pool Code	Pool Name						
30-025-49302	51020	RED HILLS;LWR BO	NE SPRING					
Property Code		erty Name	Well Number					
331336	ROJO 7811 27-2	22 FEDERAL COM	56H					
OGRID No.	ID No. Operator Name							
260297	DESCRIPTION BTA OIL PRODUCERS, LLC							

Surface Location

				0 1 2				
Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
27	25-S	33-E		220	SOUTH	1965	EAST	LEA
			Bottom Hol	e Location If Diffe	erent From Surface			
Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
22	25 - S	33-E		50	NORTH	1650	EAST	LEA
Joint or	Infill C	onsolidation C	ode Orde	er No.				
	Section 22	27 25-S Section Township 22 25-S	27 25-S 33-E Section Township Range 22 25-S 33-E	27 25-S 33-E Bottom Hol Section Township Range Lot Idn 22 25-S 33-E	27 25-S 33-E 220 Bottom Hole Location If Diffe Section Township Range Lot Idn Feet from the 22 25-S 33-E 50	27 25-S 33-E 220 SOUTH Bottom Hole Location If Different From Surface Section Township Range Lot Idn Feet from the North/South line 22 25-S 33-E 50 NORTH	27 25-S 33-E 220 SOUTH 1965 Bottom Hole Location If Different From Surface Section Township Range Lot Idn Feet from the North/South line Feet from the 22 25-S 33-E 50 NORTH 1650	27 25-S 33-E 220 SOUTH 1965 EAST Bottom Hole Location If Different From Surface Section Township Range Lot Idn Feet from the North/South line Feet from the East/West line 22 25-S 33-E 50 NORTH 1650 EAST

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

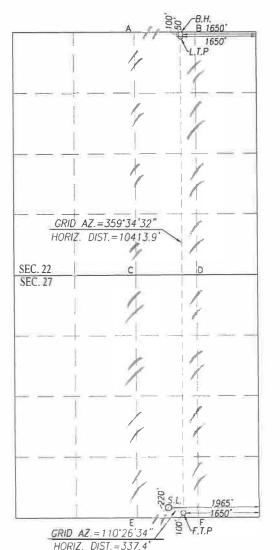



ACK



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Application Data Report

APD ID: 10400066057

Submission Date: 12/02/2020

Highlighted data reflects the most recent changes

Operator Name: BTA OIL PRODUCERS LLC

Well Number: 56H

Well Name: ROJO 7811 27-22 FEDERAL COM

Show Final Text

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

APD ID: 10400066057 Tie to previous NOS?

Submission Date: 12/02/2020

BLM Office: Carlsbad

User: Sammy Hajar

Title: Regulatory Analyst

Federal/Indian APD: FED

Lease number: NMNM26080

Is the first lease penetrated for production Federal or Indian? FED **Lease Acres:**

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? Y

Permitting Agent? NO

APD Operator: BTA OIL PRODUCERS LLC

Operator letter of designation:

Operator Info

Operator Organization Name: BTA OIL PRODUCERS LLC

Operator Address: 104 S. Pecos

Zip: 79701

Operator PO Box:

Operator City: Midland

State: TX

Operator Phone: (432)682-3753

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Field/Pool or Exploratory? Field and Pool

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: ROJO 7811 27-22 FEDERAL COM

Well Number: 56H

Well API Number:

Field Name: WildCat upper

Pool Name: 2ND BONE

Wolfcamp

SPRING SAND

Is the proposed well in an area containing other mineral resources? NONE

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 56H

Is the proposed well in an area containing other mineral resources? NONE

Is the proposed well in a Helium production area? N Use Existing Well Pad? Y New surface disturbance? Y

Type of Well Pad: MULTIPLE WELL Multiple Well Pad Name: ROJO Number: 55H, 56H, 57H and

Well Class: HORIZONTAL 7811 27-22 FEDERAL COM 58H Number of Legs: 1

Well Work Type: Drill
Well Type: OIL WELL

Describe Well Type: Well sub-Type: INFILL

Describe sub-type:

Distance to town: Distance to nearest well: 494 FT Distance to lease line: 220 FT

Reservoir well spacing assigned acres Measurement: 320 Acres

Well plat: Signed_ROJO_7811_27_22_Federal_Com_56H_C102_20201202154116.pdf

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83 Vertical Datum: NGVD29

Survey number: Reference Datum: GROUND LEVEL

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
SHL	220	FSL	196	FEL	25S	33E	27	Aliquot	32.09486		LEA	1	NEW	F	NMNM	332	0	0	Υ
Leg			5					SWSE	9	103.5580			MEXI		26080	8			
#1										04		СО	СО						
KOP	100	FSL	165	FEL	25S	33E	27	Aliquot	32.09453	-	LEA	NEW	NEW	F	NMNM	-	998	997	Υ
Leg			0					SWSE	8	103.5569			MEXI		26080	664	7	6	
#1										85		CO	CO			8			
PPP	100	FSL	165	FEL	25S	33E	27	Aliquot	32.09453	-	LEA	NEW	NEW	F	NMNM	-	101	101	Υ
Leg			0					SWSE	8	103.5569		MEXI	I		26080	678	28	14	
#1-1										85		CO	CO			6			

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 56H

Wellbore	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD	Will this well produce from this lease?
PPP		FNL		FEL	25S	33E		Aliquot	32.10514	l	LEA	1	NEW	F	NMNM	-	142	104	Υ
Leg	9		0					NWNE	8	103.5569 88		MEXI CO	CO		15091	712 6	00	54	
#1-2										00			00			0			
EXIT	100	FNL	165	FEL	25S	33E	22	Aliquot	32.12302	-	LEA	NEW	NEW	F	NMNM	-	204	104	Υ
Leg			0					NWNE	1	103.5569		MEXI		7	15091	712	72	54	
#1										92		CO	CO			6			
BHL	50	FNL	165	FEL	25S	33E	22	Aliquot	32.12315	-	LEA	NEW	NEW	F	NMNM	-	207	104	Υ
Leg			0					NWNE	9	103.5569		MEXI	MEXI		15091	712	52	54	
#1										92		co	CO			6			



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

08/02/2021

APD ID: 10400066057

Submission Date: 12/02/2020

Highlighted data reflects the most recent changes

Show Final Text

Operator Name: BTA OIL PRODUCERS LLC

Well Number: 56H

Well Name: ROJO 7811 27-22 FEDERAL COM

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
1196242	QUATERNARY	3329	0	0	ALLUVIUM	NONE	N
1196243	RUSTLER	2315	1014	1014	ANHYDRITE	NONE	N
1196244	TOP SALT	1745	1584	1584	SALT	NONE	N
1196245	BASE OF SALT	-1425	4754	4754	SALT	NONE	N
1196246	DELAWARE	-1665	4994	4994	LIMESTONE	NATURAL GAS, OIL	N
1196255	BELL CANYON	-1692	5021	5021	SANDSTONE	NATURAL GAS, OIL	N
1196248	CHERRY CANYON	-3065	6394	6394	SANDSTONE	NATURAL GAS, OIL	N
1196249	BRUSHY CANYON	-4265	7594	7594	SANDSTONE	NATURAL GAS, OIL	N
1196250	BONE SPRING LIME	-5785	9114	9114	LIMESTONE	NATURAL GAS, OIL	N
1196251	FIRST BONE SPRING SAND	-6785	10114	10114	SANDSTONE	NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Pressure Rating (PSI): 5M Rating Depth: 12000

Equipment: The blowout preventer equipment (BOP) shown in Exhibit A will consist of a (5M system) double ram type (5,000 psi WP) preventer and a bag-type (Hydril) preventer (5000 psi WP). Both units will be hydraulically operated and the ram type preventer will be equipped with blind rams on top and 5" drill pipe rams on bottom. The BOPs will be installed on the 13-3/8" surface casing and utilized continuously until total depth is reached. A 2" kill line and 3" choke line will be incorporated in the drilling spool below the ram-type BOP. A remote kill line will be used for the 5M system as per onshore order #2. Other accessory BOP equipment will include a Kelly cock, floor safety valve, choke lines, and choke manifold having a 5,000 psi WP rating. The 5M annular will be tested as per BLM drilling Operations Order No. 2, and will be test to 100% of working pressure.

Requesting Variance? NO

Variance request:

Testing Procedure: Pipe rams will be operated and checked each 24-hour period and each time the drill pipe is out of the hole. These functional tests will be documented on the daily drillers log. All BOPs and associated equipment will be tested as

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 56H

per BLM drilling Operations Order No. 2.

Choke Diagram Attachment:

5M_choke_mannifold_20200917143047.pdf

 $Choke_Hose___Test_Chart_and_Specs_20190723082742.pdf$

BOP Diagram Attachment:

5M_BOP_diagram_20200917143053.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	1070	0	1070	3328	2258	1070	J-55	54.5	ST&C	2.4	5.9	DRY	8.8	DRY	14.6
	INTERMED IATE	12.2 5	9.625	NEW	API	N	0	4980	0	4973	3419	-1645	4980	J-55	40	LT&C	1.9	1.6	DRY	2.6	DRY	3.2
3	PRODUCTI ON	8.75	5.5	NEW	API	N	0	20752	0	10454	3419	-7126	20752	P- 110	17	BUTT	1.5	2.1	DRY	1.6	DRY	1.5

Casing Attachments

Casing ID: 1 String Type: SURFACE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Rojo_56H_casing_assumption_20201202155845.JPG

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 56H

Casing Attachments

Casing ID: 2

String Type: INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Rojo_56H_casing_assumption_20201202155831.JPG

Casing ID: 3

String Type: PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

 $Rojo_56H_casing_assumption_20201202155758.JPG$

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	735	595	1.73	13.5	1029. 35	100	Class C	2% CaCl2
SURFACE	Tail		735	1070	340	1.35	14.8	459	100	Class C	2% CaCl2
INTERMEDIATE	Lead		0	4425	1305	2.46	12.8	3210. 3	100	Class C	0.5% CaCl2
INTERMEDIATE	Tail		4425	4980	200	1.34	14.8	268	25	Class C	1% CaCl2
PRODUCTION	Lead		3980	9910	580	3.9	10.5	2262	60	25% Poz 75% Class C	0.4% Fluid Loss

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 56H

	String Type	Lead/Tail	Stage Tool Depth	Тор МD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
PROI	DUCTION	Tail		9910	2075 2	2740	1.25	14.4	3425	25	Class H	0.2% LT Retarder

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

Describe the mud monitoring system utilized: PVT/Pason/Visual Monitoring

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	НА	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	1070	OTHER : FW SPUD	8.3	8.4							
1070	4973	OTHER : FW GEL	9	9.4							
4973	1045 4	OTHER : CUT BRINE	8.7	9.3							

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 56H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Drill Stem Tests will be based on geological sample shows.

List of open and cased hole logs run in the well:

MUD LOG/GEOLOGICAL LITHOLOGY LOG, GAMMA RAY LOG, CEMENT BOND LOG,

Coring operation description for the well:

None planned

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 5110 Anticipated Surface Pressure: 2810

Anticipated Bottom Hole Temperature(F): 164

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geoharzards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

BTA_Oil_Producers_LLC___EMERGENCY_CALL_LIST_20190723161502.pdf H2S_Equipment_Schematic_20190723161502.pdf H2S_Plan_20190723161502.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

Rojo_7811_27_22_Fed_Com_56H_WM_20201202161910.pdf QES___Rojo_7811_27_22_Fed_Com_56H___Geo_Survey_Rpt_20201202161910.pdf Rojo_56H_Gas_Capture_Plan_20201202162103.pdf


Other proposed operations facets description:

A variance is requested for a Multi Bowl Wellhead. See the attached schematic. *All strings will be kept 1/3 full while running.

Other proposed operations facets attachment:

Other Variance attachment:

BOP_Break_Testing_Variance_20200917143242.pdf
Multi_Bowl_Diagram_13_38_x_9_58_x_5_12_20200917143315.pdf

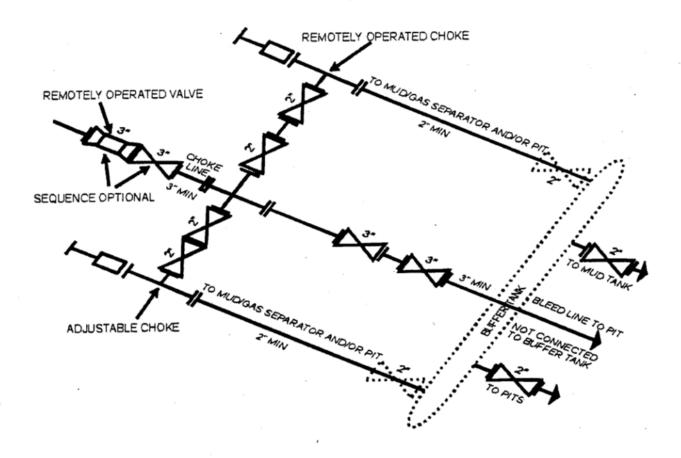

5M CHOKE MANIFOLD EQUIPMENT - CONFIGURATION OF CHOKES MAY VARY

Although not required for any of the choke manifold systems, buffer tanks are sometimes installed downstream of the choke assemblies for the purpose of manifolding the bleed lines together. When buffer tanks are employed, valves shall be installed upstream to isolate a failure or malfunction without interrupting flow control. Though not shown on 2M, 3M, 10M, OR 15M drawings, it would also be applicable to those situations.

[54 FR 39528, Sept. 27, 1989]



Contifech

CONTITECH RUBBER Industrial Kft.


No:QC-DB- 599/ 2014

Page:

16 / 176


Rig 94	DESCRIPTION OF SECTION ASSESSMENT			7226		244	55
QUALI INSPECTION A	TY CONT AND TEST		CATE	CERT.	Λo:	1592	<u>}</u>
PURCHASER:	ContiTech C	il & Marine C	orp.	P.O. N°:		4500461	1753
CONTITECH ORDER N°:	539225	HOSE TYPE:	3" ID	and other parameters and an en	Choke	& Kill Hose)
HOSE SERIAL Nº:	68547	NOMINAL / AC	TUAL LENGT	H:	7,62 m	1 / 7,66 m	graphic film of the control of the c
W.P. 68,9 MPa	10000 psi	T.P. 103,4	MPa 15	000 psi	Duration:	60	min.
ambient temperature → 10 Min		'See attacl	ıment. (1 μ	oage)			
↑ 50 MP:	The account of the County of State 1.5 or		ING	1			andrens redements
COUPLINGS Typ		Seria		Qua		Hea	
3" coupling with 4 1/16" 10K API Swivel F		2574	5533	AISI		A1582N 588	H8672
4 1/10 TOK APT SWIVET P	lange end			AISI		A1199N	
Not Designed For V	Vell Testing	j	To the Total Control of the Control			API Spec	
Fire Rated					Ten	nperature	rate:"B"
All metal parts are flawless					~		
WE CERTIFY THAT THE ABOVE INSPECTED AND PRESSURE T			RED IN ACCOR	DANGE WITI	THE TERM	MS OF THE OR	DER
STATEMENT OF CONFORMIN conditions and specifications of accordance with the referenced s	Y: We hereby o	ertify that the abou	e items/equipm	ent supplied l	re fabricate	d inspected and	tested in
Date!	Inspector	1 6 4 4 1 4 8 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Quality Con	lrol			
04. September 2014.			PELLES	, Indi	ack Rubbi estrial Kft. Control De	1	193

Contificin Ryther Industrial Kit. | Budagosti ĉi 10.11 6728 Szeged | IN-6701 P.O.Box 152 Szaged, Hungshy Phone: 156.67.66 737 | Fax: +36.62.556 738 | e-mail inte@fluid contiects in I Internet www.contiects.rut.evr.in.contiects in The Court of Osongrád County as Registry Court | Registry Court No. Cg 08.69.69252? | FITVAT No. P.I.11087298 Book cots Commerciand, Zit., Budagost | 14220106-26833693

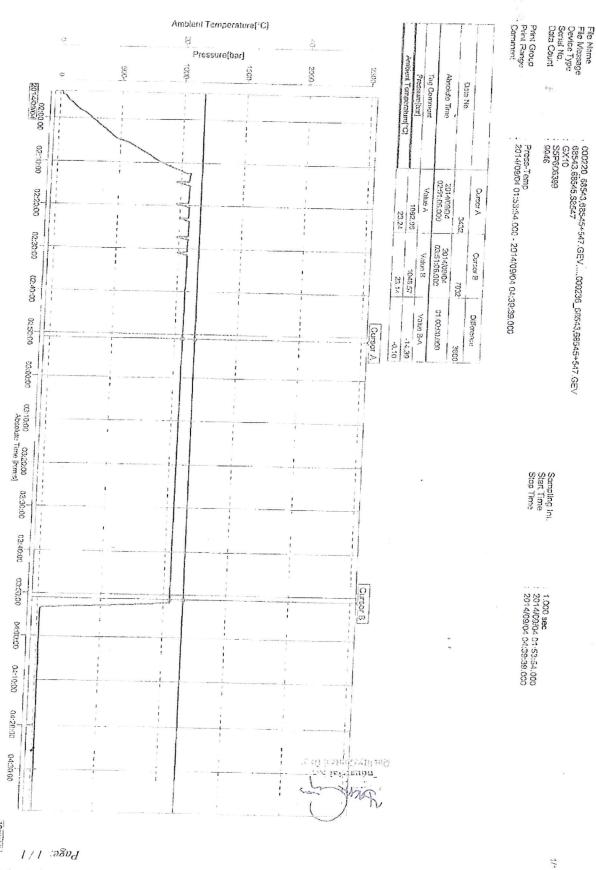

VILIVCHWENI OF QUALITY CONTROL INSPECTION AND TEST CERTIFICATE — Vo.: 1588, 1590, 1592

13-5/8" 5,000 PSI BOP

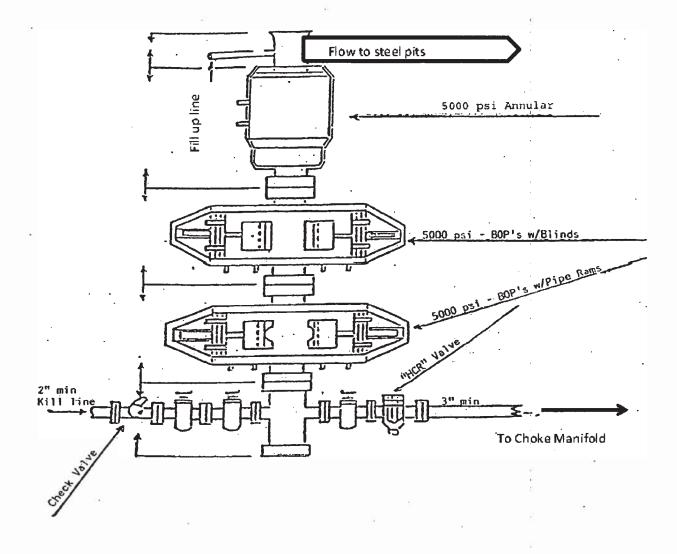

2.30	~	BTA Oil	Producers,	LLC						WELL:	Rojo 7	811 27-	22 #56	iH	
13		104 S P	ecos							TVD:	10454				
		Midland	TX 79701							MD:	20752				
						D	RILLING P	LAN							
Casing 1	Program														
Hole Size	Csg.Size	From (MD)	To (MD)	From (TVD)	To (TVD)	Tapered String	Veight (lbs)	Grade	Conn.	Collapse	Burst	Body Tension	Joint Tensio n	Dry/ Buoyant	Mud Veight (PPg)
17 1/2	13 3/8	0	1070	0	1070	No	54.5	J-55	sтc	2.4	5.9	14.6	8.8	Dry	8.3
12 1/4	9 5/8	0	4980	o	4973	No	40	J-55	гтс	1.9	1.6	3.2	2.6	Dry	9.4
	5.5		20752	0	10454	No	17	P110	Buttress	1.5	2.1	1.5	1.6	Dry	9.4

EMERGENCY CALL LIST

	<u>OFFICE</u>	MOBILE
BTA Oil Producers LLC OFFICE	432-682-3753	
BEN GRIMES, Operations	432-682-3753	432-559-4309
NICK EATON, Drilling	432-682-3753	432-260-7841
TRACE WOHLFAHRT, Completions	432-682-3753	

EMERGENCY RESPONSE NUMBERS

	<u>OFFICE</u>
STATE POLICE	575-748-9718
EDDY COUNTY SHERIFF	575-746-2701
EMERGENCY MEDICAL SERVICES (AMBULANCE)	911 or 575-746-2701
EDDY COUNTY EMERGENCY MANAGEMENT (HARRY BURGESS)	575-887-9511
STATE EMERGENCY RESPONSE CENTER (SERC)	575-476-9620
CARLSBAD POLICE DEPARTMENT	575-885-2111
CARLSBAD FIRE DEPARTMENT	575-885-3125
NEW MEXICO OIL CONSERVATION DIVISION	575-748-1283
INDIAN FIRE & SAFETY	800-530-8693
HALLIBURTON SERVICES	800-844-8451

Ν

BTA OIL PRODUCERS LLC



HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

1. HYDROGEN SULFIDE TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

- a. The hazards and characteristics of hydrogen sulfide (H₂S).
- b. The proper use and maintenance of personal protective equipment and life support systems.
- c. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
- d. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

- a. The effects of H2S on metal components. If high tensile tubulars are to be used, personnel will be trained in their special maintenance requirements.
- b. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
- c. The contents and requirements of the H₂S Drilling Operations Plan and the Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H2S zone (within 3 days or 500 feet) and weekly H2S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H2S Drilling Operations Plan and the Public Protection Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received the proper training.

2. H₂S SAFETY EQUIPMENT AND SYSTEMS

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H2S. If H2S greater than 100 ppm is encountered in the gas stream we will shut in and install H2S equipment.

- a. Well Control Equipment:
 - Flare line.
 - Choke manifold with remotely operated choke.
 - Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit.
 - Auxiliary equipment to include: annular preventer, mud-gas separator, rotating head.
- b. Protective equipment for essential personnel:
 - Mark II Surviveair 30-minute units located in the dog house and at briefing areas.
- c. H2S detection and monitoring equipment:

- 2 portable H2S monitor positioned on location for best coverage and response. These units have warning lights and audible sirens when H2S levels of 20 ppm are reached.
- d. Visual warning systems: Caution/Danger signs shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used, when appropriate. See example attached.
- e. Mud Program:
 The mud program has been designed to minimize the volume of H2S circulated to the surface.
- f. Metallurgy:
 All drill strings, casings, tubing, wellhead, blowout preventers, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service.
- g. Communication:
 Company vehicles equipped with cellular telephone.

WARNING

YOU ARE ENTERING AN H₂S AREA AUTHORIZED PERSONNEL ONLY

- 1. BEARDS OR CONTACT LENSES NOT ALLOWED
- 2. HARD HATS REQUIRED
- 3. SMOKING IN DESIGNATED AREAS ONLY
- 4. BE WIND CONSCIOUS AT ALL TIMES
- 5. CK WITH BTA OIL PRODUCERS LLC FOREMAN AT MAIN OFFICE

BTA OIL PRODUCERS LLC

1-432-682-3753

Page 20 of 59 Received by OCD: 8/9/2021 3:46:35 PM Company Name: BTA Oil Producers, LLC Rojo 7811 27-22 Fed Com #56H Lea County, NM (NAD 83) Q200*** & WT-200*** Rojo 7811 27-22 Fed Com #56H Rojo 7811 27-22 Fed Com #55H/Design #1 Lea County, NM (NAD 83) 10200 Rig: Patterson Created By: Shane Robbins Date: 10/21/2020 Design #1 10000-TD @ 20752' MD / 10454' TVD Rojo 7811 27-22 Fed Com #58H/Design #1 Rojo 7811 27-22 Fed Com #57H/Design #1 9000-EOB @ 3.49° Inc / 121.98° Azm DIRECTIONAL DRILLING Azimuths to Grid North Correction: 6.07° Magnetic Field Strength: 47610.8nT Dip Angle: 59.67° Date: 10/22/2020 Model: HDGM2020 PROJECT DETAILS: Lea County, NM (NAD 83) Geodetic System: US State Plane 1983 Datum: North American Datum 1983 Ellipsoid: GRS 1980 Zone: New Mexico Eastern Zone System Datum: Mean Sea Level **WELL DETAILS:** Rojo 7811 27-22 Fed Com #56H 3329.0 Easting Latittude Longitu 781435.90 32° 5' 41.527 N03° 33' 28.813 W +N/-S Longitude Northing **Easting** 0.0 Rojo 7811 27-22 Fed Com #55H/Design #1 Rojo 7811 27-22 Fed Com #58H/Design #1 - Drop 2°/100' EOD @ Vert Rojo 7811 27-22 Fed Com #57H/Design #1 Rojo 7811 27-22 Fed Com #56H/Design #1 -120 -140 EOB @ 90° Inc / 359.58° Azm / 10454' TVD **ANNOTATIONS VSect Departure Annotation** Azi 0.0 Build 2°/100' 0.00 1300.0 5.3 EOB @ 3.49° Inc / 121.98° Azm 1474.6 1474.5 121.98 368.0 Drop 2°/100' 7430.7 -194.9 121.98 7419.5 316.7 7605.3 0.00 7594.0 -197.8 373.4 EOD @ Vert EOB @ 3.49° Inc / 121.98° Azm 373.4 Build 12°/100' 9976.5 -197.8 313.2 286.9 850.8 EOB @ 90° Inc / 359.58° Azm / 10454' TVD 239.0 10296.7 10865.3 TD @ 20752' MD / 10454' TVD 10737.8 279.7 20752.3 359.58 10454.0 10293.9 EOD @ Vert 1400 10400-TD @ 20752' MD / 10454' TVD Vertical Section at 1.33° (200 usft/in) 10400 EOB @ 90° Inc / 359.58° Azm / 10454' TVD 1400 2200 Vertical Section at 1.33° (200 usft/in) Released to Imaging: 8/11/2021 3:09:28 PM



BTA Oil Producers, LLC

Lea County, NM (NAD 83) Sec 27, T25-S, R33-E Rojo 7811 27-22 Fed Com #56H

Wellbore #1

Plan: Design #1

Survey Report - Geographic

11 November, 2020





QES Survey Report - Geographic



BTA Oil Producers, LLC Company: Project: Lea County, NM (NAD 83) Sec 27, T25-S, R33-E Site:

Well: Rojo 7811 27-22 Fed Com #56H

Wellbore #1 Wellbore: Design: Design #1

Local Co-ordinate Reference:

Well Rojo 7811 27-22 Fed Com #56H WELL @ 3354.0usft (Patterson) **TVD Reference:** WELL @ 3354.0usft (Patterson) MD Reference:

North Reference: Grid

Minimum Curvature **Survey Calculation Method:** Database: EDM 5000.1 Single User Db

Lea County, NM (NAD 83) **Project**

US State Plane 1983 Map System: North American Datum 1983 Geo Datum: Map Zone: New Mexico Eastern Zone

Mean Sea Level System Datum:

Site Sec 27, T25-S, R33-E

Northing: 403,958.90 usft Site Position: Latitude: 32.108177 From: Мар Easting: 782,026.00 usft Longitude: -103.555986 Slot Radius: 0.41 ° **Position Uncertainty:** 0.0 usft 13-3/16 " **Grid Convergence:**

Well Rojo 7811 27-22 Fed Com #56H **Well Position** +N/-S 0.0 usft Northing: 399,113.10 usft Latitude: 32.094869 +E/-W 0.0 usft Easting: 781,435.90 usft Longitude: -103.558004 0.0 usft usft Ground Level: 3,329.0 usft **Position Uncertainty** Wellhead Elevation:

Wellbore #1 Wellbore Magnetics **Model Name** Sample Date Declination Dip Angle Field Strength (°) (°) (nT) HDGM2020 47,610.80000000 10/22/2020 6.48 59.67

Design #1 Design Audit Notes: Version: Phase: PLAN Tie On Depth: 0.0 **Vertical Section:** Depth From (TVD) +N/-S +E/-W Direction (usft) (usft) (usft) (°) 0.0 0.0 0.0 1.33

10/22/2020 **Survey Tool Program** Date From То (usft) (usft) Survey (Wellbore) **Tool Name** Description OWSG MWD - Standard MWD 0.0 20,752.3 Design #1 (Wellbore #1)

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
0.0	0.00	0.00	0.0	0.0	0.0	399,113.10	781,435.90	32.094869	-103.558004
100.0	0.00	0.00	100.0	0.0	0.0	399,113.10	781,435.90	32.094869	-103.558004
200.0	0.00	0.00	200.0	0.0	0.0	399,113.10	781,435.90	32.094869	-103.558004
300.0	0.00	0.00	300.0	0.0	0.0	399,113.10	781,435.90	32.094869	-103.558004
400.0	0.00	0.00	400.0	0.0	0.0	399,113.10	781,435.90	32.094869	-103.558004
500.0	0.00	0.00	500.0	0.0	0.0	399,113.10	781,435.90	32.094869	-103.558004
600.0	0.00	0.00	600.0	0.0	0.0	399,113.10	781,435.90	32.094869	-103.558004
700.0	0.00	0.00	700.0	0.0	0.0	399,113.10	781,435.90	32.094869	-103.558004
800.0	0.00	0.00	800.0	0.0	0.0	399,113.10	781,435.90	32.094869	-103.558004
900.0	0.00	0.00	900.0	0.0	0.0	399,113.10	781,435.90	32.094869	-103.558004
1,000.0	0.00	0.00	1,000.0	0.0	0.0	399,113.10	781,435.90	32.094869	-103.558004
1,100.0	0.00	0.00	1,100.0	0.0	0.0	399,113.10	781,435.90	32.094869	-103.558004

RYTY

QESSurvey Report - Geographic



Company:BTA Oil Producers, LLCProject:Lea County, NM (NAD 83)Site:Sec 27, T25-S, R33-E

Well: Rojo 7811 27-22 Fed Com #56H

Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference:

TVD Reference:

WELL @ 3354.0usft (Patterson)
Grid

North Reference: Grid
Survey Calculation Method: Minimum Curvature

Database:

EDM 5000.1 Single User Db

Well Rojo 7811 27-22 Fed Com #56H

WELL @ 3354.0usft (Patterson)

nned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
1,200.0	0.00	0.00	1,200.0	0.0	0.0	399,113.10	781,435.90	32.094869	-103.5580
1,300.0	0.00	0.00	1,300.0	0.0	0.0	399,113.10	781,435.90	32.094869	-103.5580
Build 2°/									
1,400.0	2.00	121.98	1,400.0	-0.9	1.5	399,112.17	781,437.38	32.094866	-103.5579
1,474.6	3.49	121.98	1,474.5	-2.8	4.5	399,110.28	781,440.41	32.094861	-103.5579
	3.49° Inc / 121		, -			,	- , -		
1,500.0	3.49	121.98	1,499.8	-3.6	5.8	399,109.46	781,441.72	32.094858	-103.5579
1,600.0	3.49	121.98	1,599.7	-6.9	11.0	399,106.24	781,446.89	32.094850	-103.5579
1,700.0	3.49	121.98	1,699.5	-10.1	16.2	399,103.01	781,452.05	32.094841	-103.557
1,800.0	3.49	121.98	1,799.3	-13.3	21.3	399,099.79	781,457.22	32.094832	-103.5579
1,900.0	3.49	121.98	1,899.1	-16.5	26.5	399,096.56	781,462.38	32.094823	-103.557
2,000.0	3.49	121.98	1,998.9	-19.8	31.7	399,093.33	781,467.55	32.094814	-103.5579
2,100.0	3.49	121.98	2,098.7	-23.0	36.8	399,090.11	781,472.71	32.094805	-103.557
2,200.0	3.49	121.98	2,198.5	-26.2	42.0	399,086.88	781,477.88	32.094796	-103.557
2,300.0	3.49	121.98	2,298.4	-29.4	47.1	399,083.66	781,483.05	32.094787	-103.557
2,400.0	3.49	121.98	2,398.2	-32.7	52.3	399,080.43	781,488.21	32.094778	-103.557
2,500.0	3.49	121.98	2,498.0	-35.9	57.5	399,077.21	781,493.38	32.094769	-103.557
2,600.0	3.49	121.98	2,597.8	-39.1	62.6	399,073.98	781,498.54	32.094760	-103.557
2,700.0	3.49	121.98	2,697.6	-42.3	67.8	399,070.75	781,503.71	32.094751	-103.557
2,800.0	3.49	121.98	2,797.4	-45.6	73.0	399,067.53	781,508.87	32.094742	-103.557
2,900.0	3.49	121.98	2,897.2	-48.8	78.1	399,064.30	781,514.04	32.094733	-103.557
3,000.0	3.49	121.98	2,997.1	-52.0	83.3	399,061.08	781,519.21	32.094724	-103.557
3,100.0	3.49	121.98	3,096.9	-55.2	88.5	399,057.85	781,524.37	32.094715	-103.557
3,200.0	3.49	121.98	3,196.7	-58.5	93.6	399,054.63	781,529.54	32.094706	-103.557
3,300.0	3.49	121.98	3,296.5	-61.7	98.8	399,051.40	781,534.70	32.094697	-103.557
3,400.0	3.49	121.98	3,396.3	-64.9	104.0	399,048.17	781,539.87	32.094688	-103.557
3,500.0	3.49	121.98	3,496.1	-68.2	109.1	399,044.95	781,545.03	32.094679	-103.557
3,600.0	3.49	121.98	3,595.9	-71.4	114.3	399,041.72	781,550.20	32.094670	-103.557
3,700.0	3.49	121.98	3,695.8	-74.6	119.5	399,038.50	781,555.37	32.094661	-103.557
3,800.0	3.49	121.98	3,795.6	-77.8	124.6	399,035.27	781,560.53	32.094652	-103.557
3,900.0	3.49	121.98	3,895.4	-81.1	129.8	399,032.05	781,565.70	32.094643	-103.557
4,000.0	3.49	121.98	3,995.2	-84.3	135.0	399,028.82	781,570.86	32.094634	-103.557
4,100.0	3.49	121.98	4,095.0	-87.5	140.1	399,025.59	781,576.03	32.094625	-103.557
4,200.0	3.49	121.98	4,194.8	-90.7	145.3	399,022.37	781,581.19	32.094616	-103.557
4,300.0	3.49	121.98	4,294.6	-94.0	150.5	399,019.14	781,586.36	32.094607	-103.557
4,400.0	3.49	121.98	4,394.5	-97.2	155.6	399,015.92	781,591.52	32.094598	-103.557
4,500.0	3.49	121.98	4,494.3	-100.4	160.8	399,012.69	781,596.69	32.094589	-103.557
4,600.0	3.49	121.98	4,594.1	-103.6	166.0	399,009.47	781,601.86	32.094580	-103.557
4,700.0	3.49	121.98	4,693.9	-106.9	171.1	399,006.24	781,607.02	32.094571	-103.557
4,800.0	3.49	121.98	4,793.7	-110.1	176.3	399,003.01	781,612.19	32.094563	-103.557
4,900.0	3.49	121.98	4,893.5	-113.3	181.5	398,999.79	781,617.35	32.094554	-103.557
5,000.0	3.49	121.98	4,993.3	-116.5	186.6	398,996.56	781,622.52	32.094545	-103.557
5,100.0	3.49	121.98	5,093.2	-119.8	191.8	398,993.34	781,627.68	32.094536	-103.557
5,200.0	3.49	121.98	5,193.0	-113.0	197.0	398,990.11	781,632.85	32.094527	-103.557
5,300.0	3.49	121.98	5,292.8	-126.2	202.1	398,986.89	781,638.02	32.094518	-103.557
5,400.0	3.49	121.98	5,392.6	-120.2	207.3	398,983.66	781,643.18	32.094509	-103.557
5,500.0	3.49	121.98	5,492.4	-132.7	212.4	398,980.43	781,648.35	32.094500	-103.557
5,600.0	3.49	121.98	5,592.2	-135.7	217.6	398,977.21	781,653.51	32.094491	-103.557
5,700.0	3.49	121.98	5,692.0	-139.1	222.8	398,973.98	781,658.68	32.094482	-103.557
5,800.0	3.49	121.98	5,791.9	-142.3	227.9	398,970.76	781,663.84	32.094473	-103.557
5,900.0	3.49	121.98	5,791.9	-142.3 -145.6	233.1	398,967.53	781,669.01	32.094464	-103.557
6,000.0	3.49	121.98	5,991.5	-143.8	238.3	398,964.31	781,674.17	32.094455	-103.557
6,100.0	3.49	121.98	6,091.3	-140.0 -152.0	243.4	398,961.08	781,679.34	32.094446	-103.557
6,200.0	3.49	121.98	6,191.1	-152.0	243.4	398,957.85	781,684.51	32.094437	-103.557
									-103.557
6,300.0	3.49	121.98	6,290.9	-158.5	253.8	398,954.63	781,689.67	32.094428	

QES

Survey Report - Geographic



Company: BTA Oil Producers, LLC Project: Lea County, NM (NAD 83) Site: Sec 27, T25-S, R33-E

Well: Rojo 7811 27-22 Fed Com #56H

Wellbore: Wellbore #1 Design: Design #1

Local Co-ordinate Reference:

Well Rojo 7811 27-22 Fed Com #56H TVD Reference: WELL @ 3354.0usft (Patterson) MD Reference: WELL @ 3354.0usft (Patterson)

North Reference: Grid

Minimum Curvature **Survey Calculation Method:**

Database: EDM 5000.1 Single User Db

Pla	nned Survey									_
	Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
	6,400.0	3.49	121.98	6,390.7	-161.7	258.9	398,951.40	781,694.84	32.094419	-103.557171
	6,500.0	3.49	121.98	6,490.6	-164.9	264.1	398,948.18	781,700.00	32.094410	-103.557155
	6,600.0	3.49	121.98	6,590.4	-168.1	269.3	398,944.95	781,705.17	32.094401	-103.557138
	6,700.0	3.49	121.98	6,690.2	-171.4	274.4	398,941.73	781,710.33	32.094392	-103.557122
	6,800.0	3.49	121.98	6,790.0	-174.6	279.6	398,938.50	781,715.50	32.094383	-103.557105
	6,900.0	3.49	121.98	6,889.8	-177.8	284.8	398,935.27	781,720.67	32.094374	-103.557088
	7,000.0	3.49	121.98	6,989.6	-181.0	289.9	398,932.05	781,725.83	32.094365	-103.557072
	7,100.0	3.49	121.98	7,089.5	-184.3	295.1	398,928.82	781,731.00	32.094356	-103.557055
	7,200.0	3.49	121.98	7,189.3	-187.5	300.3	398,925.60	781,736.16	32.094347	-103.557039
	7,300.0	3.49	121.98 121.98	7,289.1	-190.7 -194.0	305.4 310.6	398,922.37 398,919.15	781,741.33	32.094338 32.094329	-103.557022
	7,400.0 7,430.7	3.49 3.49	121.98	7,388.9 7,419.5	-194.0 -194.9	310.6	398,918.16	781,746.49 781,748.08	32.094327	-103.557005 -103.557000
			121.90	7,419.5	-194.9	312.2	390,910.10	701,740.00	32.094321	-103.337000
	Drop 2°/ 17,500.0	2.11	121.98	7,488.8	-196.7	315.1	398,916.36	781,750.95	32.094322	-103.556991
	7,605.3	0.00	0.00	7,466.6	-190.7 -197.8	316.7	398,915.34	781,750.95 781,752.59	32.094319	-103.556986
			0.00	7,394.0	-197.0	310.7	390,913.34	701,732.39	32.094319	-103.330900
	EOD @ V 7,700.0	0.00	0.00	7,688.7	-197.8	316.7	398,915.34	781,752.59	32.094319	-103.556986
	7,700.0	0.00	0.00	7,788.7	-197.8	316.7	398,915.34	781,752.59	32.094319	-103.556986
	7,900.0	0.00	0.00	7,888.7	-197.8	316.7	398,915.34	781,752.59	32.094319	-103.556986
	8,000.0	0.00	0.00	7,988.7	-197.8	316.7	398,915.34	781,752.59	32.094319	-103.556986
	8,100.0	0.00	0.00	8,088.7	-197.8	316.7	398,915.34	781,752.59	32.094319	-103.556986
	8,200.0	0.00	0.00	8,188.7	-197.8	316.7	398,915.34	781,752.59	32.094319	-103.556986
	8,300.0	0.00	0.00	8,288.7	-197.8	316.7	398,915.34	781,752.59	32.094319	-103.556986
	8,400.0	0.00	0.00	8,388.7	-197.8	316.7	398,915.34	781,752.59	32.094319	-103.556986
	8,500.0	0.00	0.00	8,488.7	-197.8	316.7	398,915.34	781,752.59	32.094319	-103.556986
	8,600.0	0.00	0.00	8,588.7	-197.8	316.7	398,915.34	781,752.59	32.094319	-103.556986
	8,700.0	0.00	0.00	8,688.7	-197.8	316.7	398,915.34	781,752.59	32.094319	-103.556986
	8,800.0	0.00	0.00	8,788.7	-197.8	316.7	398,915.34	781,752.59	32.094319	-103.556986
	8,900.0	0.00	0.00	8,888.7	-197.8	316.7	398,915.34	781,752.59	32.094319	-103.556986
	9,000.0	0.00	0.00	8,988.7	-197.8	316.7	398,915.34	781,752.59	32.094319	-103.556986
	9,100.0	0.00	0.00	9,088.7	-197.8	316.7	398,915.34	781,752.59	32.094319	-103.556986
	9,200.0	0.00	0.00	9,188.7	-197.8	316.7	398,915.34	781,752.59	32.094319	-103.556986
	9,300.0	0.00	0.00	9,288.7	-197.8	316.7	398,915.34	781,752.59	32.094319	-103.556986
	9,400.0	0.00	0.00	9,388.7	-197.8	316.7	398,915.34	781,752.59	32.094319	-103.556986
	9,500.0	0.00 0.00	0.00 0.00	9,488.7	-197.8 -197.8	316.7 316.7	398,915.34	781,752.59 781,752.59	32.094319	-103.556986 -103.556986
	9,600.0 9,700.0	0.00	0.00	9,588.7 9,688.7	-197.8 -197.8	316.7	398,915.34 398,915.34	781,752.59 781,752.59	32.094319 32.094319	-103.556986
	9,800.0	0.00	0.00	9,788.7	-197.8	316.7	398,915.34	781,752.59	32.094319	-103.556986
	9,900.0	0.00	0.00	9,888.7	-197.8	316.7	398,915.34	781,752.59	32.094319	-103.556986
	9,987.8	0.00	0.00	9,976.5	-197.8	316.7	398,915.34	781,752.59	32.094319	-103.556986
	Build 12°			-,			,	,		
	10,000.0	1.47	359.58	9,988.7	-197.6	316.7	398,915.50	781,752.59	32.094319	-103.556986
	10,025.0	4.47	359.58	10,013.7	-196.3	316.7	398,916.79	781,752.58	32.094323	-103.556986
	10,050.0	7.47	359.58	10,038.6	-193.7	316.7	398,919.39	781,752.56	32.094330	-103.556986
	10,075.0	10.47	359.58	10,063.2	-189.8	316.6	398,923.29	781,752.53	32.094341	-103.556986
	10,100.0	13.47	359.58	10,087.7	-184.6	316.6	398,928.47	781,752.49	32.094355	-103.556986
	10,125.0	16.47	359.58	10,111.8	-178.2	316.5	398,934.92	781,752.44	32.094373	-103.556986
	10,150.0	19.47	359.58	10,135.6	-170.5	316.5	398,942.63	781,752.39	32.094394	-103.556986
	10,175.0	22.47	359.58	10,159.0	-161.5	316.4	398,951.58	781,752.32	32.094418	-103.556986
	10,200.0	25.47	359.58	10,181.8	-151.4	316.3	398,961.73	781,752.25	32.094446	-103.556986
	10,225.0	28.47	359.58	10,204.1	-140.0	316.3	398,973.07	781,752.16	32.094477	-103.556986
	10,250.0	31.47	359.58	10,225.7	-127.5	316.2	398,985.55	781,752.07	32.094512	-103.556986
	10,275.0	34.47	359.58	10,246.7	-113.9	316.1	398,999.16	781,751.97	32.094549	-103.556986
	10,300.0	37.47	359.58	10,266.9	-99.3	316.0	399,013.84	781,751.86	32.094590	-103.556986
	10,325.0	40.47	359.58	10,286.4	-83.5	315.8	399,029.56	781,751.74	32.094633	-103.556986

RYTYX

QESSurvey Report - Geographic



Company:BTA Oil Producers, LLCProject:Lea County, NM (NAD 83)Site:Sec 27, T25-S, R33-E

Well: Rojo 7811 27-22 Fed Com #56H

Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

WELL @ 3354.0usft (Patterson) Grid

Survey Calculation Method:

ase: EDM 5000.1 Single User Db

Well Rojo 7811 27-22 Fed Com #56H

WELL @ 3354.0usft (Patterson)

Minimum Curvature

Design:	Design #1				Database:		EDM 5000.	1 Single User Db	
Diamed Summer									
Planned Survey	y								
Measured			Vertical			Мар	Мар		
Depth	Inclination	Azimuth	Depth	+N/-S	+E/-W	Northing	Easting		
(usft)	(°)	(°)	(usft)	(usft)	(usft)	(usft)	(usft)	Latitude	Longitude
10,350.0		359.58	10,305.0	-66.8	315.7	399,046.27	781,751.62	32.094679	-103.556986
10,375.0		359.58	10,322.7	-49.2	315.6	399,063.94	781,751.49	32.094727	-103.556986
10,400.0		359.58	10,339.4	-30.6	315.5	399,082.50	781,751.35	32.094778	-103.556986
10,425.0 10,450.0		359.58 359.58	10,355.1 10,369.8	-11.2 9.0	315.3 315.2	399,101.92 399,122.14	781,751.21 781,751.06	32.094832 32.094887	-103.556986 -103.556986
10,475.0		359.58	10,383.5	30.0	315.2	399,143.09	781,750.90	32.094945	-103.556986
10,500.0		359.58	10,396.0	51.6	314.8	399,164.73	781,750.74	32.095004	-103.556986
10,525.0		359.58	10,407.3	73.9	314.7	399,187.00	781,750.58	32.095066	-103.556986
10,550.0	67.47	359.58	10,417.5	96.7	314.5	399,209.83	781,750.41	32.095128	-103.556986
10,575.0	70.47	359.58	10,426.5	120.1	314.3	399,233.16	781,750.24	32.095192	-103.556986
10,600.0		359.58	10,434.2	143.8	314.2	399,256.93	781,750.06	32.095258	-103.556986
10,625.0		359.58	10,440.7	168.0	314.0	399,281.07	781,749.88	32.095324	-103.556986
10,650.0		359.58	10,445.9	192.4	313.8	399,305.52	781,749.70	32.095391	-103.556986
10,675.0 10,700.0		359.58 359.58	10,449.8 10,452.5	217.1 242.0	313.6 313.4	399,330.20 399,355.06	781,749.52 781,749.33	32.095459 32.095527	-103.556986 -103.556986
10,700.0		359.56	10,452.5	2 4 2.0 266.9	313.4	399,380.02	781,749.35 781,749.15	32.095527 32.095596	-103.556986
10,737.8		359.58	10,454.0	279.7	313.2	399,392.79	781,749.05	32.095631	-103.556986
	90° Inc / 359.5			2. 0	0.0.2	000,0020		02.00000.	.00.00000
10,800.0		359.58	10,454.0	341.9	312.7	399,455.02	781,748.59	32.095802	-103.556986
10,900.0		359.58	10,454.0	441.9	312.0	399,555.02	781,747.85	32.096077	-103.556986
11,000.0	90.00	359.58	10,454.0	541.9	311.2	399,655.01	781,747.11	32.096352	-103.556986
11,100.0	90.00	359.58	10,454.0	641.9	310.5	399,755.01	781,746.37	32.096627	-103.556986
11,200.0	90.00	359.58	10,454.0	741.9	309.7	399,855.01	781,745.63	32.096902	-103.556986
11,300.0		359.58	10,454.0	841.9	309.0	399,955.00	781,744.89	32.097177	-103.556987
11,400.0		359.58	10,454.0	941.9	308.3	400,055.00	781,744.15	32.097452	-103.556987
11,500.0		359.58 359.58	10,454.0	1,041.9 1,141.9	307.5 306.8	400,155.00	781,743.41	32.097726 32.098001	-103.556987 -103.556987
11,600.0 11,700.0		359.56 359.58	10,454.0 10,454.0	1,141.9	306.0	400,255.00 400,354.99	781,742.67 781,741.93	32.098276	-103.556987
11,800.0		359.58	10,454.0	1,241.9	305.3	400,354.99	781,741.19	32.098551	-103.556987
11,900.0		359.58	10,454.0	1,441.9	304.6	400,554.99	781,740.45	32.098826	-103.556987
12,000.0		359.58	10,454.0	1,541.9	303.8	400,654.99	781,739.71	32.099101	-103.556987
12,100.0		359.58	10,454.0	1,641.9	303.1	400,754.98	781,738.97	32.099376	-103.556987
12,200.0	90.00	359.58	10,454.0	1,741.9	302.3	400,854.98	781,738.23	32.099651	-103.556987
12,300.0	90.00	359.58	10,454.0	1,841.9	301.6	400,954.98	781,737.49	32.099925	-103.556987
12,400.0		359.58	10,454.0	1,941.9	300.8	401,054.97	781,736.75	32.100200	-103.556987
12,500.0		359.58	10,454.0	2,041.9	300.1	401,154.97	781,736.00	32.100475	-103.556987
12,600.0		359.58	10,454.0	2,141.9	299.4	401,254.97	781,735.26	32.100750	-103.556987
12,700.0 12,800.0		359.58 350.58	10,454.0	2,241.9	298.6	401,354.97	781,734.52	32.101025 32.101300	-103.556987
12,900.0		359.58 359.58	10,454.0 10,454.0	2,341.9 2,441.9	297.9 297.1	401,454.96 401,554.96	781,733.78 781,733.04	32.101300 32.101575	-103.556987 -103.556988
13,000.0		359.58	10,454.0	2,541.9	296.4	401,654.96	781,732.30	32.101850	-103.556988
13,100.0		359.58	10,454.0	2,641.9	295.7	401,754.96	781,731.56	32.102124	-103.556988
13,200.0		359.58	10,454.0	2,741.9	294.9	401,854.95	781,730.82	32.102399	-103.556988
13,300.0	90.00	359.58	10,454.0	2,841.9	294.2	401,954.95	781,730.08	32.102674	-103.556988
13,400.0	90.00	359.58	10,454.0	2,941.8	293.4	402,054.95	781,729.34	32.102949	-103.556988
13,500.0		359.58	10,454.0	3,041.8	292.7	402,154.94	781,728.60	32.103224	-103.556988
13,600.0		359.58	10,454.0	3,141.8	292.0	402,254.94	781,727.86	32.103499	-103.556988
13,700.0		359.58	10,454.0	3,241.8	291.2	402,354.94	781,727.12	32.103774	-103.556988
13,800.0 13,900.0		359.58 359.58	10,454.0 10,454.0	3,341.8 3,441.8	290.5 289.7	402,454.94 402,554.93	781,726.38 781,725.64	32.104049 32.104323	-103.556988 -103.556988
14,000.0		359.56 359.58	10,454.0	3, 44 1.8	289.0	402,654.93	781,725.64 781,724.90	32.104523 32.104598	-103.556988
14,100.0		359.58	10,454.0	3,641.8	288.3	402,754.93	781,724.16	32.104873	-103.556988
14,200.0		359.58	10,454.0	3,741.8	287.5	402,854.92	781,723.42	32.105148	-103.556988
14,300.0		359.58	10,454.0	3,841.8	286.8	402,954.92	781,722.68	32.105423	-103.556988
14,400.0	90.00	359.58	10,454.0	3,941.8	286.0	403,054.92	781,721.94	32.105698	-103.556989

QES



Survey Report - Geographic

TVD Reference:

MD Reference:

North Reference:



Company:BTA Oil Producers, LLCProject:Lea County, NM (NAD 83)Site:Sec 27, T25-S, R33-E

Well: Rojo 7811 27-22 Fed Com #56H

Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference:

Well Rojo 7811 27-22 Fed Com #56H WELL @ 3354.0usft (Patterson)

WELL @ 3354.0usft (Patterson)
WELL @ 3354.0usft (Patterson)

Grid

Survey Calculation Method: Minimum Curvature

Database: EDM 5000.1 Single User Db

Design:	Design #1				Database:		LDIVI 0000.	1 Single Oser Db	
Planned Survey									
Measured	nclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
14,500.0	90.00	359.58	10,454.0	4,041.8	285.3	403,154.92	781,721.19	32.105973	-103.556989
14,600.0	90.00	359.58	10,454.0	4,141.8	284.6	403,254.91	781,720.45	32.106248	-103.556989
14,700.0	90.00	359.58	10,454.0	4,241.8	283.8	403,354.91	781,719.71	32.106522	-103.556989
14,800.0	90.00	359.58	10,454.0	4,341.8	283.1	403,454.91	781,718.97	32.106797	-103.556989
14,900.0	90.00	359.58	10,454.0	4,441.8	282.3	403,554.91	781,718.23	32.107072	-103.556989
15,000.0	90.00	359.58	10,454.0	4,541.8	281.6	403,654.90	781,717.49	32.107347	-103.556989
15,100.0	90.00	359.58	10,454.0	4,641.8	280.9	403,754.90	781,716.75	32.107622	-103.556989
15,200.0	90.00	359.58	10,454.0	4,741.8	280.1	403,854.90	781,716.01	32.107897	-103.556989
15,300.0	90.00	359.58	10,454.0	4,841.8	279.4	403,954.89	781,715.27	32.108172	-103.556989
15,400.0	90.00	359.58	10,454.0	4,941.8	278.6	404,054.89	781,714.53	32.108447	-103.556989
15,500.0	90.00	359.58	10,454.0	5,041.8	277.9	404,154.89	781,713.79	32.108722	-103.556989
15,600.0	90.00	359.58	10,454.0	5,141.8	277.2	404,254.89	781,713.05	32.108996	-103.556989
15,700.0	90.00	359.58	10,454.0	5,241.8	276.4	404,354.88	781,712.31	32.109271	-103.556989
15,800.0	90.00	359.58	10,454.0	5,341.8	275.7	404,454.88	781,711.57	32.109546	-103.556989
15,900.0	90.00	359.58	10,454.0	5,441.8	274.9	404,554.88	781,710.83	32.109821	-103.556990
16,000.0	90.00	359.58	10,454.0	5,541.8	274.2	404,654.88	781,710.09	32.110096	-103.556990
16,100.0	90.00	359.58	10,454.0	5,641.8	273.4	404,754.87	781,709.35	32.110371	-103.556990
16,200.0	90.00	359.58	10,454.0	5,741.8	272.7	404,854.87	781,708.61	32.110646	-103.556990
16,300.0	90.00	359.58	10,454.0	5,841.8	272.0	404,954.87	781,707.87	32.110921	-103.556990
16,400.0	90.00	359.58	10,454.0	5,941.8	271.2	405,054.86	781,707.13	32.111195	-103.556990
16,500.0	90.00	359.58	10,454.0	6,041.8	270.5	405,154.86	781,706.39	32.111470	-103.556990
16,600.0	90.00	359.58	10,454.0	6,141.8	269.7	405,254.86	781,705.64	32.111745	-103.556990
16,700.0	90.00	359.58	10,454.0	6,241.8	269.0	405,354.86	781,704.90	32.112020	-103.556990
16,800.0	90.00	359.58	10,454.0	6,341.8	268.3	405,454.85	781,704.16	32.112295	-103.556990
16,900.0	90.00 90.00	359.58	10,454.0	6,441.8	267.5 266.8	405,554.85	781,703.42	32.112570	-103.556990 -103.556990
17,000.0	90.00	359.58 359.58	10,454.0	6,541.7 6,641.7	266.0	405,654.85	781,702.68	32.112845	-103.556990
17,100.0 17,200.0	90.00	359.56 359.58	10,454.0 10,454.0	6,741.7	265.3	405,754.85 405,854.84	781,701.94 781,701.20	32.113120 32.113394	-103.556990
17,200.0	90.00	359.58	10,454.0	6,841.7	264.6	405,954.84	781,701.20	32.113669	-103.556990
17,400.0	90.00	359.58	10,454.0	6,941.7	263.8	406,054.84	781,700.40	32.113944	-103.556991
17,500.0	90.00	359.58	10,454.0	7,041.7	263.1	406,154.83	781,698.98	32.114219	-103.556991
17,600.0	90.00	359.58	10,454.0	7,141.7	262.3	406,254.83	781,698.24	32.114494	-103.556991
17,700.0	90.00	359.58	10,454.0	7,241.7	261.6	406,354.83	781,697.50	32.114769	-103.556991
17,800.0	90.00	359.58	10,454.0	7,341.7	260.9	406,454.83	781,696.76	32.115044	-103.556991
17,900.0	90.00	359.58	10,454.0	7,441.7	260.1	406,554.82	781,696.02	32.115319	-103.556991
18,000.0	90.00	359.58	10,454.0	7,541.7	259.4	406,654.82	781,695.28	32.115593	-103.556991
18,100.0	90.00	359.58	10,454.0	7,641.7	258.6	406,754.82	781,694.54	32.115868	-103.556991
18,200.0	90.00	359.58	10,454.0	7,741.7	257.9	406,854.82	781,693.80	32.116143	-103.556991
18,300.0	90.00	359.58	10,454.0	7,841.7	257.2	406,954.81	781,693.06	32.116418	-103.556991
18,400.0	90.00	359.58	10,454.0	7,941.7	256.4	407,054.81	781,692.32	32.116693	-103.556991
18,500.0	90.00	359.58	10,454.0	8,041.7	255.7	407,154.81	781,691.58	32.116968	-103.556991
18,600.0	90.00	359.58	10,454.0	8,141.7	254.9	407,254.80	781,690.83	32.117243	-103.556991
18,700.0	90.00	359.58	10,454.0	8,241.7	254.2	407,354.80	781,690.09	32.117518	-103.556991
18,800.0	90.00	359.58	10,454.0	8,341.7	253.5	407,454.80	781,689.35	32.117792	-103.556991
18,900.0	90.00	359.58	10,454.0	8,441.7	252.7	407,554.80	781,688.61	32.118067	-103.556991
19,000.0	90.00	359.58	10,454.0	8,541.7	252.0	407,654.79	781,687.87	32.118342	-103.556992
19,100.0	90.00	359.58	10,454.0	8,641.7	251.2	407,754.79	781,687.13	32.118617	-103.556992
19,200.0	90.00	359.58	10,454.0	8,741.7	250.5	407,854.79	781,686.39	32.118892	-103.556992
19,300.0	90.00	359.58	10,454.0	8,841.7	249.8	407,954.79	781,685.65	32.119167	-103.556992
19,400.0	90.00	359.58	10,454.0	8,941.7	249.0	408,054.78	781,684.91	32.119442	-103.556992
19,500.0	90.00	359.58	10,454.0	9,041.7	248.3	408,154.78	781,684.17	32.119717	-103.556992
19,600.0	90.00	359.58	10,454.0	9,141.7	247.5	408,254.78	781,683.43	32.119991	-103.556992
19,700.0	90.00	359.58	10,454.0	9,241.7	246.8	408,354.77	781,682.69	32.120266	-103.556992
19,800.0	90.00	359.58	10,454.0	9,341.7	246.1	408,454.77	781,681.95	32.120541	-103.556992
19,900.0	90.00	359.58	10,454.0	9,441.7	245.3	408,554.77	781,681.21	32.120816	-103.556992



BUX

QESSurvey Report - Geographic



Company:BTA Oil Producers, LLCProject:Lea County, NM (NAD 83)Site:Sec 27, T25-S, R33-E

Well: Rojo 7811 27-22 Fed Com #56H

Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference:

TVD Reference:
MD Reference:
North Reference:

Well Rojo 7811 27-22 Fed Com #56H WELL @ 3354.0usft (Patterson) WELL @ 3354.0usft (Patterson)

Grid

Survey Calculation Method: Minimum Curvature

Database: EDM 5000.1 Single User Db

leasured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (usft)	Map Easting (usft)	Latitude	Longitude
20,000.0	90.00	359.58	10,454.0	9,541.7	244.6	408,654.77	781,680.47	32.121091	-103.55699
20,100.0	90.00	359.58	10,454.0	9,641.7	243.8	408,754.76	781,679.73	32.121366	-103.55699
20,200.0	90.00	359.58	10,454.0	9,741.7	243.1	408,854.76	781,678.99	32.121641	-103.55699
20,300.0	90.00	359.58	10,454.0	9,841.7	242.3	408,954.76	781,678.25	32.121916	-103.55699
20,400.0	90.00	359.58	10,454.0	9,941.7	241.6	409,054.76	781,677.51	32.122190	-103.55699
20,500.0	90.00	359.58	10,454.0	10,041.7	240.9	409,154.75	781,676.77	32.122465	-103.55699
20,600.0	90.00	359.58	10,454.0	10,141.7	240.1	409,254.75	781,676.02	32.122740	-103.55699
20,700.0	90.00	359.58	10,454.0	10,241.6	239.4	409,354.75	781,675.28	32.123015	-103.55699
20,752.3	90.00	359.58	10,454.0	10,293.9	239.0	409,407.00	781,674.90	32.123159	-103.55699

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
VP Rojo 56H - plan hits target cen - Point	0.00 ter	0.00	7,594.0	-197.8	316.7	398,915.34	781,752.59	32.094319	-103.556986
PBHL Rojo 7811 27-22 F - plan hits target cen - Rectangle (sides W	ter	359.58 0,490.0)	10,454.0	10,293.9	239.0	409,407.00	781,674.90	32.123159	-103.556993

Plan Annotations				
Measured	Measured Vertical		dinates	
Depth (usft)	Depth (usft)	+N/-S (usft)	+E/-W (usft)	Comment
1300	1300	0	0	Build 2°/100'
1475	1474	-3	5	EOB @ 3.49° Inc / 121.98° Azm
7431	7420	-195	312	Drop 2°/100'
7605	7594	-198	317	EOD @ Vert
9988	9976	-198	317	Build 12°/100'
10,738	10,454	280	313	EOB @ 90° Inc / 359.58° Azm / 10454' TVD
20,752	10,454	10,294	239	TD @ 20752' MD / 10454' TVD

District 1 1625 N. French Dr., Hobbs, NM 88240 811 S. First St., Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy, Minerals and Natural Resources Department

Submit Original to Appropriate District Office

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Date: 10/13/2020	GAS CAPTURE PLAN		
☑ Original☐ Amended - Reason for Amendment:	Operator & OGRID No.:	260297	
☐ Amended - Reason for Amendment:			

This Gas Capture Plan outlines actions to be taken by the Operator to reduce well/production facility flaring/venting for new completion (new drill, recomplete to new zone, re-frac) activity.

Note: Form C-129 must be submitted and approved prior to exceeding 60 days allowed by Rule (Subsection A of 19.15.18.12 NMAC).

Well(s)/Production Facility - Name of facility

The well(s) that will be located at the production facility are shown in the table below.

Well Name	API	Well Location (ULSTR)	Footages	Expected MCF/D	Flared or Vented	Comments
ROJO 7811 27-22		SEC 27; 25S; 33E	220 FSL 1965 FEL	2000	Flared	Battery Connected
FEDERAL COM 56H		_				To ETP System

Gathering System and Pipeline Notification

Well(s) will be connected to a production facility after flowback operations are complete, if gas transporter system is in place. The gas produced from production facility is dedicated to Gas Transporter and will be connected to Gas Transporter low/high pressure gathering system located in LEA County, New Mexico. It will require 0 'of pipeline to (ETP) connect the facility to low/high pressure gathering system. Operator provides (periodically) to Gas Transporter a drilling, completion and estimated first production date for wells that are scheduled to be drilled in the foreseeable future. In addition, Operator and Gas Transporter have periodic conference calls to discuss changes to drilling and completion schedules. Gas from these wells will be processed at Gas Transporter Processing Plant located in Sec.____, Twn.____, Rng. County, New Mexico. The actual flow of the gas will be based on compression operating parameters and gathering system pressures.

Flowback Strategy

After the fracture treatment/completion operations, well(s) will be produced to temporary production tanks and gas will be flared or vented. During flowback, the fluids and sand content will be monitored. When the produced fluids contain minimal sand, the wells will be turned to production facilities. Gas sales should start as soon as the wells start flowing through the production facilities, unless there are operational issues on Gas Transporter system at that time. Based on current information, it is Operator's belief the system can take this gas upon completion of the well(s)

Safety requirements during cleanout operations from the use of underbalanced air cleanout systems may necessitate that sand and non-pipeline quality gas be vented and/or flared rather than sold on a temporary basis.

Alternatives to Reduce Flaring

Below are alternatives considered from a conceptual standpoint to reduce the amount of gas flared.

- Power Generation On lease
 - Only a portion of gas is consumed operating the generator, remainder of gas will be flared
- Compressed Natural Gas On lease
 - . Gas flared would be minimal, but might be uneconomical to operate when gas volume declines
- NGL Removal On lease

Released to Imaging: 8/11/2021 3:09:28 PM

BOP Break Testing Request

BTA requests permission to allow BOP Break Testing under the following conditions:

- After a full BOP test is conducted on the first well on the pad.
- When skidding to drill a hole section that does not penetrate into the Wolfcamp.
- Full BOP test will be required prior to drilling any production hole.



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT SUPO Data Report

APD ID: 10400066057

Submission Date: 12/02/2020

Operator Name: BTA OIL PRODUCERS LLC

Well Number: 56H

reflects the most recent changes

Highlighted data

Well Name: ROJO 7811 27-22 FEDERAL COM Well Type: OIL WELL

Well Work Type: Drill

Show Final Text

Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

20110298_Rojo_7811_27_22_Fed_Com_56H_Vicinity_Topo___Access_Rd_Map_20201202162238.pdf

Existing Road Purpose: ACCESS Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? NO

Existing Road Improvement Description:

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? YES

New Road Map:

20110298_Rojo_7811_27_22_Fed_Com_56H_Vicinity_Topo___Access_Rd_Map_20201202162253.pdf

New road type: RESOURCE

Length: 200 Feet Width (ft.): 30

Max slope (%): 2 Max grade (%): 2

Army Corp of Engineers (ACOE) permit required? N

ACOE Permit Number(s):

New road travel width: 30

New road access erosion control: Road construction requirements and regular maintenance would alleviate potential impacts to the access road from water erosion damage.

New road access plan or profile prepared? N

New road access plan attachment:

Access road engineering design? N

Access road engineering design attachment:

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 56H

Turnout? N

Access surfacing type: OTHER

Access topsoil source: BOTH

Access surfacing type description: Native Caliche

Access onsite topsoil source depth: 6

Offsite topsoil source description: Material will be obtained from the closest existing caliche pit as designated by the BLM.

Onsite topsoil removal process: The top 6 inches of topsoil is pushed off and stockpiled along the side of the location. An approximate 160 X 160 area is used within the proposed well site to remove caliche. Subsoil is removed and stockpiled within the pad site to build the location and road. Then subsoil is pushed back in the hole and caliche is spread accordingly across proposed access road

Access other construction information:

Access miscellaneous information:

Number of access turnouts: Access turnout map:

Drainage Control

New road drainage crossing: OTHER

Drainage Control comments: Proposed access road will be crowned and ditched and constructed of 6 inch rolled and compacted caliche. Water will be diverted where necessary to avoid ponding, maintain good drainage, and to be consistent with local drainage patterns.

Road Drainage Control Structures (DCS) description: Any ditches will be at 3:1 slope and 3 feet wide.

Road Drainage Control Structures (DCS) attachment:

Access Additional Attachments

Section 3 - Location of Existing Wells

Existing Wells Map? YES

Attach Well map:

20110298_Rojo_7811_27_22_Fed_Com_56H_1_Mile_Radius___C102_20201202162307.pdf

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? DEFER

Estimated Production Facilities description: Defer, CTB will be sundried at a later date.

Section 5 - Location and Types of Water Supply

Water Source Table

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 56H

Water source type: OTHER

Describe type: PIT

Water source use type: SURFACE CASING

STIMULATION

DUST CONTROL

INTERMEDIATE/PRODUCTION

CASING

Source latitude: Source longitude:

Source datum:

Water source permit type: PRIVATE CONTRACT

Water source transport method: TRUCKING

Source land ownership: FEDERAL

Source transportation land ownership: PRIVATE

Water source volume (barrels): 100000 Source volume (acre-feet): 12.88930963

Source volume (gal): 4200000

Water source and transportation map:

Rojo_7811_Water_Transportation_Map__SESE_Quarter_Quarter_of_Section_S22_T25S_R33E__20201103153339.pdf

Water source comments: Water Pit is in SESE Quarter Quarter of Section 22; T25S; R33E

New water well? N

New Water Well Info

Well latitude: Well Longitude: Well datum:

Well target aquifer:

Est. depth to top of aquifer(ft): Est thickness of aquifer:

Aquifer comments:

Aquifer documentation:

Well depth (ft): Well casing type:

Well casing outside diameter (in.): Well casing inside diameter (in.):

New water well casing?

Used casing source:

Drilling method: Drill material:

Grout material: Grout depth:

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 56H

Casing length (ft.): Casing top depth (ft.):

Well Production type: Completion Method:

Water well additional information:

State appropriation permit:

Additional information attachment:

Section 6 - Construction Materials

Using any construction materials: YES

Construction Materials description: Caliche used for construction of the drilling pad and access road will be obtained from the closest existing caliche pit as approved by the BLM or from prevailing deposits found under the location. If there is not sufficient material available, caliche will be purchased from the nearest caliche pit located in the SWNW Quarter Quarter of Section 23; T25S; R33E Lea County, NM.

Construction Materials source location attachment:

Section 7 - Methods for Handling Waste

Waste type: GARBAGE

Waste content description: Trash

Amount of waste: 500 pounds

Waste disposal frequency: One Time Only

Safe containment description: Trash produced during drilling and completion operations will be collected in a trash

container and disposed of properly. **Safe containment attachment:**

Waste disposal type: HAUL TO COMMERCIAL Disposal location ownership: COMMERCIAL

FACILITY

Disposal type description:

Disposal location description: Trucked to a state approved disposal facility.

Waste type: SEWAGE

Waste content description: Human waste and grey water.

Amount of waste: 1000 gallons

Waste disposal frequency: One Time Only

Safe containment description: Waste material will be stored safely and disposed of properly.

Safe containment attachment:

Waste disposal type: HAUL TO COMMERCIAL Disposal location ownership: COMMERCIAL

FACILITY

Disposal type description:

Disposal location description: Trucked to a state approved disposal facility.

Received by OCD: 8/9/2021 3:46:35 PM

Page 35 of 59

Operator Name: BTA OIL PRODUCERS LLC

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 56H

Waste type: DRILLING

Waste content description: Drilling fluids and cuttings.

Amount of waste: 4164 barrels

Waste disposal frequency: One Time Only

Safe containment description: All drilling fluids will be stored safely and disposed of properly.

Safe containment attachment:

Waste disposal type: HAUL TO COMMERCIAL Disposal location ownership: COMMERCIAL

FACILITY

Disposal type description:

Disposal location description: Trucked to a state approved disposal facility.

Reserve Pit

Reserve Pit being used? NO

Temporary disposal of produced water into reserve pit? NO

Reserve pit length (ft.) Reserve pit width (ft.)

Reserve pit depth (ft.)

Reserve pit volume (cu. yd.)

Is at least 50% of the reserve pit in cut?

Reserve pit liner

Reserve pit liner specifications and installation description

Cuttings Area

Cuttings Area being used? NO

Are you storing cuttings on location? N

Description of cuttings location

Cuttings area length (ft.)

Cuttings area width (ft.)

Cuttings area depth (ft.)

Cuttings area volume (cu. yd.)

Is at least 50% of the cuttings area in cut?

WCuttings area liner

Cuttings area liner specifications and installation description

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 56H

Section 8 - Ancillary Facilities

Are you requesting any Ancillary Facilities?: N

Ancillary Facilities attachment:

Comments:

Section 9 - Well Site Layout

Well Site Layout Diagram:

Rig_Layout_20190930140859.pdf 20130554_Access_Rd_to_Rojo_7811_27_22_Fed_Com_55H_58H_20201201150507.pdf

20110298_Rojo_7811_27_22_Fed_Com_56H_Well_Site_Plan__600s__20201202162338.pdf

Comments:

Section 10 - Plans for Surface Reclamation

Type of disturbance: New Surface Disturbance Multiple Well Pad Name: ROJO 7811 27-22 FEDERAL COM

Multiple Well Pad Number: 55H, 56H, 57H and 58H

Recontouring attachment:

Drainage/Erosion control construction: During construction proper erosion control methods will be used to control erosion, runoff, and siltation of the surrounding area.

Drainage/Erosion control reclamation: Proper erosion control methods will be used on the area to control erosion, runoff, and siltation of the surrounding area.

Well pad proposed disturbance Well pad interim reclamation (acres): Well pad long term disturbance

(acres): 4.49 (acres): 3.93

Road proposed disturbance (acres): 0 Road interim reclamation (acres): 0 Road long term disturbance (acres): 0

Powerline proposed disturbance Powerline interim reclamation (acres): Powerline long term disturbance (acres): 0 (acres): 0

Pipeline proposed disturbance Pipeline interim reclamation (acres): 0 Pipeline long term disturbance

(acres): 0

(acres): 0 Other interim reclamation (acres): 0

Other proposed disturbance (acres): 0 Other long term disturbance (acres): 0

Total interim reclamation: 0.56 Total proposed disturbance: 4.49 Total long term disturbance: 3.93

Disturbance Comments:

Reconstruction method: The areas planned for interim reclamation will then be recontoured to the original contour if feasible, or if not feasible, to an interim contour that blends with the surrounding topography as much as possible. Where applicable, the fill material of the well pad will be backfilled into the cut to bring the area back to the original contour. The interim cut and fill slopes prior to re-seeding will not be steeper than a 3:1 ratio, unless the adjacent native topography is steeper. Note: Constructed slopes may be much steeper during drilling, but will be recontoured to the above ratios during interim reclamation.

Topsoil redistribution: Topsoil will be evenly respread and aggressively revegetated over the entire disturbed area not needed for all-weather operations.

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 56H

Soil treatment: To seed the area, the proper BLM seed mixture, free of noxious weeds, will be used. Final seedbed preparation will consist of contour cultivating to a depth of 4 to 6 inches within 24 hours prior to seeding, dozer tracking, or other imprinting in order to break the soil crust and create seed germination micro-sites.

Existing Vegetation at the well pad: The historic climax plant community is a grassland dominated by black grama, dropseeds, and blue stems with sand sage and shinnery oak distributed evenly throughout. Current landscape displays mesquite. shinnery oak, yucca, desert sage, fourwing saltbush, snakeweed, and bunch grasses.

Existing Vegetation at the well pad attachment:

Existing Vegetation Community at the road: Refer to "Existing Vegetation at the well pad"

Existing Vegetation Community at the road attachment:

Existing Vegetation Community at the pipeline: Refer to "Existing Vegetation at the well pad"

Existing Vegetation Community at the pipeline attachment:

Existing Vegetation Community at other disturbances: Refer to "Existing Vegetation at the well pad"

Existing Vegetation Community at other disturbances attachment:

Non native seed used? N

Non native seed description:

Seedling transplant description:

Will seedlings be transplanted for this project? N

Seedling transplant description attachment:

Will seed be harvested for use in site reclamation?

Seed harvest description:

Seed harvest description attachment:

Seed Management

Seed Table

Seed Summary

Pounds/Acre

Total pounds/Acre:

Seed Type

Seed reclamation attachment:

Operator Contact/Responsible Official Contact Info

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 56H

First Name: Chad Last Name: Smith

Phone: (432)682-3753 Email: csmith@btaoil.com

Seedbed prep:

Seed BMP:

Seed method:

Existing invasive species? N

Existing invasive species treatment description:

Existing invasive species treatment attachment:

Weed treatment plan description: No invasive species present. Standard regular maintenance to maintain a clear location and road.

Weed treatment plan attachment:

Monitoring plan description: Identify areas supporting weeds prior to construction; prevent the introduction and spread of weeds from construction equipment during construction; and contain weed seeds and propagules by preventing segregated topsoil from being spread to adjacent areas. No invasive species present. Standard regular maintenance to maintain a clear location and road.

Monitoring plan attachment:

Success standards: To maintain all disturbed areas as per Gold Book standards.

Pit closure description: N/A

Pit closure attachment:

Section 11 - Surface Ownership

Disturbance type: WELL PAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 56H

USFS Forest/Grassland:

USFS Ranger District:

Disturbance type: NEW ACCESS ROAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Section 12 - Other Information

Right of Way needed? N

Use APD as ROW?

ROW Type(s):

ROW Applications

SUPO Additional Information:


Use a previously conducted onsite? Y

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 56H

Previous Onsite information: Onsite conducted by McKenna Ryder BLM on 10/8/2020

Other SUPO Attachment

VICINITY, TOPOGRAPHIC AND ACCESS ROAD MAP

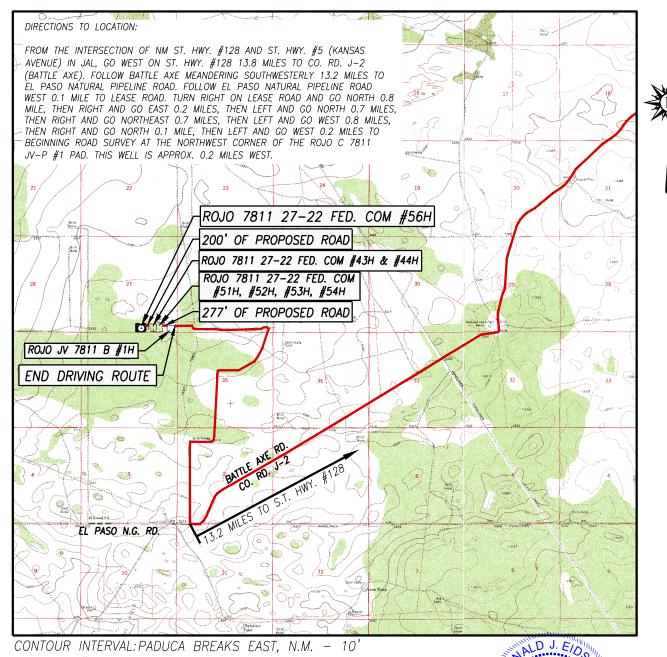

SCALE: 1" = 1 MILE

SEC. 27 TWP. 25-S RGE. 33-E

SURVEY N.M.P.M.

COUNTY LEA STATE NEW MEXICO

DESCRIPTION 220' FSL & 1965' FEL

ELEVATION 3329'

OPERATOR BTA OIL PRODUCERS, LLC


LEASE ROJO 7811 27-22 FEDERAL COM

U.S.G.S. TOPOGRAPHIC MAP PADUCA BREAKS EAST, N.M.

I, RONALD J. EIDSON, NEW MEXICO PROFESSIONAL NEURIE POR No. 3239, DO HEREBY CERTIFY THAT THIS SURVEY PLAT AND THE ACTIVAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE, PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION; THAT AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MANNUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT, IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF POFFSSION


RONALD J. EIDSON Sonald Coidan

DATE: <u>09/14/2020</u>



412 N. DAL PASO HOBBS, N.M. 88240 (575) 393-3117 www.jwsc.biz TBPLS# 10021000

VICINITY, TOPOGRAPHIC AND ACCESS ROAD MAP

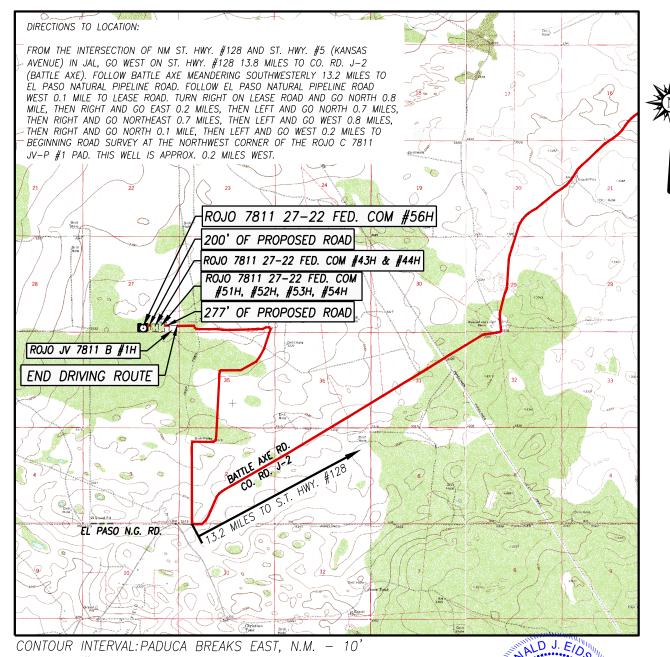

SCALE: 1" = 1 MILE

SEC. 27 TWP. 25-S RGE. 33-E

SURVEY N.M.P.M.

COUNTY LEA STATE NEW MEXICO

DESCRIPTION 220' FSL & 1965' FEL

ELEVATION 3329'

OPERATOR BTA OIL PRODUCERS, LLC

LEASE ROJO 7811 27-22 FEDERAL COM

U.S.G.S. TOPOGRAPHIC MAP PADUCA BREAKS EAST, N.M.

I, RONALD J. EIDSON, NEW MEXICO PROFESSIONAL NEURIE POR No. 3239, DO HEREBY CERTIFY THAT THIS SURVEY PLAT AND THE ACTIVAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE, PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION; THAT AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MANNUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT, IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF POFFSSION

RONALD J. EIDSON SSONALD J. EI

DATE: <u>09/14/2020</u>



412 N. DAL PASO HOBBS, N.M. 88240 (575) 393-3117 www.jwsc.biz TBPLS# 10021000



DISTRICT I 1625 N. French Dr., Hobbs, NM 88240 Phone: (575) 393-6161 Fax: (575) 393-0720 DISTRICT II 811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720 DISTRICT III 1000 Rio Brazos Road, Aztec, NM 87410 Phone: (505) 334-6178 Fax: (505) 334-6170

DISTRICT IV

State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, New Mexico 87505

Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office

□AMENDED REPORT

1220 S. St. Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3460 Fax: (505) 476-3462

	Phone: (505) 476-3460 Fax: (505) 476-3462 WELL LOCATION AND ACREAGE DEDICATION PLAT							
API Number		Pool Code	Pool Name					
				Red Hills; 2nd Bone Spr	e Spring Sand			
	Property Code	1		erty Name	Well Number			
		ROJO 7811 27-22 FEDERAL COM			56H			
	OGRID No.		Opera	ator Name	Elevation			
	l l							

BTA OIL PRODUCERS, LLC 3329' 260297 Surface Location

UL or lot No. Section Township Range Lot Idn Feet from the North/South line Feet from the East/West line County 27 33-E 220 **SOUTH** 1965 0 25-S **EAST** LEA

Bottom Hole Location If Different From Surface


UL or lot No.	Section 22	Township 25-S	Range 33-E	Lot Idn	Feet from the 50	North/South line NORTH	Feet from the 1650	East/West line EAST	County LEA
Dedicated Acres 320	Joint or	Infill	Consolidation C	ode Ord	er No.				


NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION 30-025-45333 30-025-42414-30-025-46087 30-025-45710 30-025 45586 30-025-44350 30-025-444350 30-025-44296 30-025-45865 30-025-42373 30-025-42372 30-025-43476 30-025-43843 30-025-43472 30-025-43844 **LEGEND** 30-025-43 30-025-26188 **O**DENOTES PROPOSED WELL)-025-4599030-025-08390 B) (Å) 30-025 30-025-4535 NENE 30-025-43218 NENW (C) (B) SENW SW SENE SWIMM SENW SWNE SENE (G) (E) (G 91 (H) (E) (F) A 5280. NW NESW NESW NWSE NWSW VSE (K) (1) (L) (1) (L) (K) 25S 33E 30-025-22786 (P) SESW 30-025-08391 SWSW (M) (0) (M) 30-025-39701 30-025-39 (N) 30-025-42458 30-075-4349030-025-4369330-025-43689 822 30-025-43489 25-4232630-025-42327 822 NWNW NEWW NENE (D) (C) (A) (A) (D) (B) SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field holes of actual surveys made by me or under my surveys short and that the same is true and correct to the best of my belief. 0-02,5 SENW WNE SENE SWNW (F) (E) G) (E) (F) (G) (H) 30-025-44300 -30-025-44297-3 Date of Survey 3239 Signature & Seal o Professi 30-025 34015 (R) NWSW NESW NWSE VSF NWSW J) (J) (1) (L) (L) (K) POFESSIONAL 30-025-44299 SW (C SWSW SESW WSE (P) (M) (0) (P) (M) (N) 2000 2000 0 Feet Gary G. Eidson 12641 Ronald J. Eidson 3239 Scale:1"=2000' ACK JWSC W.O.: 20.11.0298



BTA OIL PRODUCERS, LLC
WATER TRANSPORTATION MAP
ROJO 7811 Federal WATER PIT
SEC 22; T25S; R33E (Water Pit is in SESE QUARTER QUARTER)
LEA COUNTY, NM



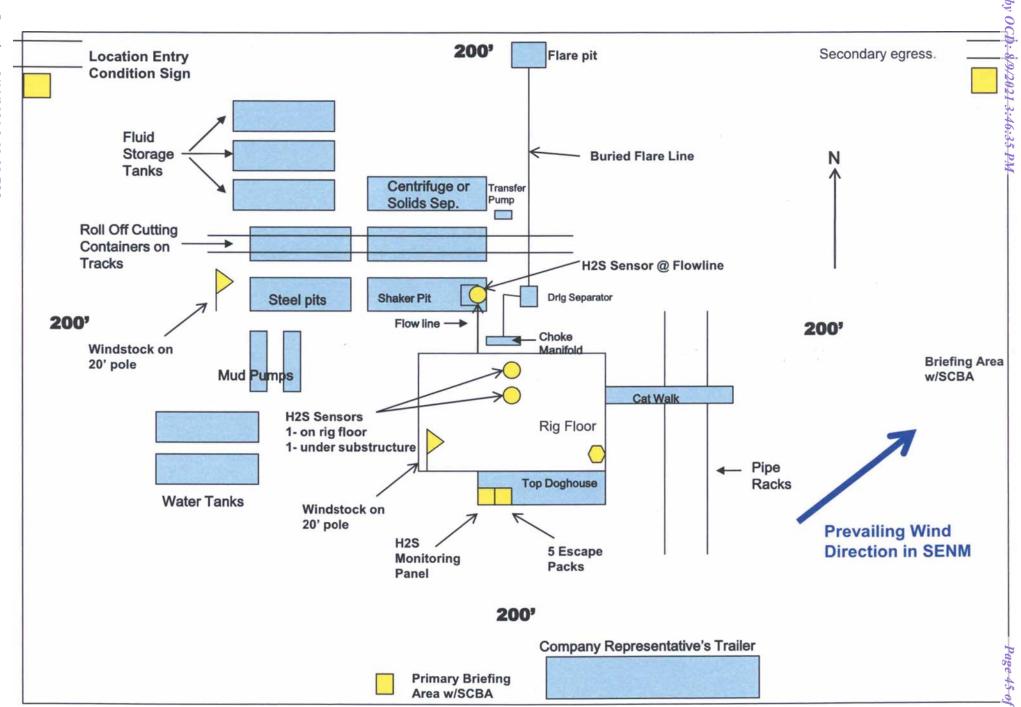

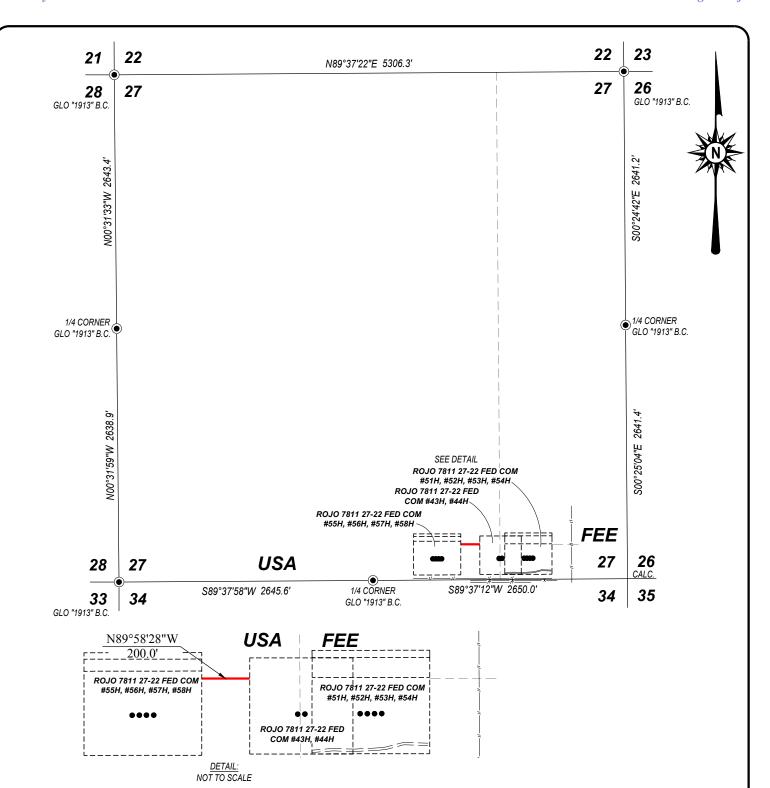

DESCRIPTION

SURVEY OF A STRIP OF LAND 30.0 FEET WIDE AND 200.0 FEET OR 0.038 MILES IN LENGTH CROSSING USA LAND IN SECTION 27, TOWNSHIP 25 SOUTH, RANGE 33 EAST, N.M.P.M., LEA COUNTY, NEW MEXICO, AND BEING 15.0 FEET LEFT AND 15.0 FEET RIGHT OF THE ABOVE PLATTED CENTERLINE SURVEY.



BEARINGS SHOWN HEREON ARE MERCATOR GRID AND CONFORM TO THE NEW MEXICO COORDINATE SYSTEM "NEW MEXICO EAST ZONE" NORTH AMERICAN DATUM 1983. DISTANCES ARE SURFACE VALUES.

I, RONALD J. EIDSON, NEW MEXICO PROFESSIONAL SURVEYOR No. 3239, DO HEREBY CERTIFY THAT THIS SURVEY PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM

STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Sonald Lidan


DATE: 11/30/2020

PROVIDING SURVEYING SERVICES

SINCE 1946

JOHN WEST SURVEYING COMPANY

412 N. DAL PASO HOBBS, N.M. 88240 (575) 393-3117 www.jwsc.biz TBPLS# 10021000

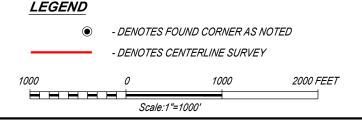


BTA OIL PRODUCERS, LLC

SURVEY FOR AN ACCESS ROAD TO THE ROJO 7811 27-22 FEDERAL COM #55H-#58H PAD IN SECTION 27, TOWNSHIP 25 SOUTH, RANGE 33 EAST, N.M.P.M. LEA COUNTY, NEW MEXICO

 Survey Date:
 6/30/2020
 CAD Date:
 11/24/2020
 Drawn By:
 ACK

 W.O. No.:
 20130554
 Rev:
 Rel. W.O.:
 Sheet 1 of 1

© DRAFTING Released to Imaging: 8/11/2021 3:09:28 PM

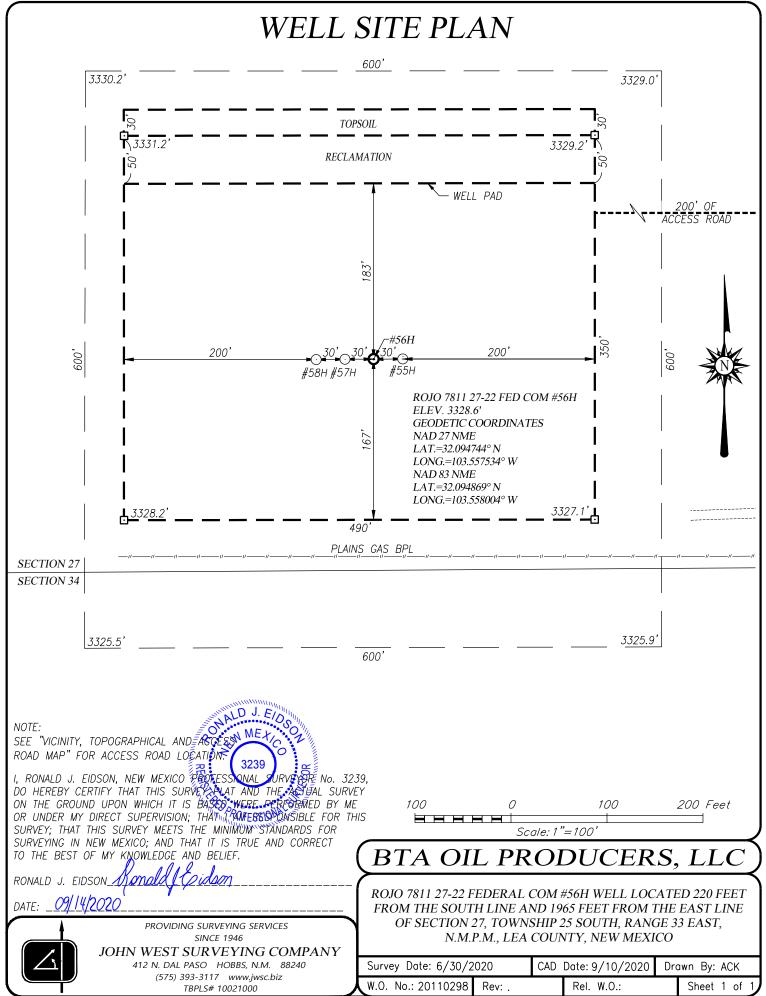



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

PWD Data Report

PWD disturbance (acres):

APD ID: 10400066057 **Submission Date:** 12/02/2020

Operator Name: BTA OIL PRODUCERS LLC

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 56H

Well Type: OIL WELL Well Work Type: Drill

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? N

Produced Water Disposal (PWD) Location:

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

PWD surface owner:

Pit liner manufacturers information:

Precipitated solids disposal:

Decribe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 56H

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? N

Produced Water Disposal (PWD) Location:

PWD disturbance (acres): PWD surface owner:

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Decribe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 56H

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information attachment:

Section 4 - Injection

Would you like to utilize Injection PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner: PWD disturbance (acres):

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

Injection well type:

Injection well number: Injection well name:

Assigned injection well API number? Injection well API number:

Injection well new surface disturbance (acres):

Minerals protection information:

Mineral protection attachment:

Underground Injection Control (UIC) Permit?

UIC Permit attachment:

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner: PWD disturbance (acres):

Surface discharge PWD discharge volume (bbl/day):

Surface Discharge NPDES Permit?

Surface Discharge NPDES Permit attachment:

Surface Discharge site facilities information:

Surface discharge site facilities map:

Section 6 - Other

Would you like to utilize Other PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner: PWD disturbance (acres):

Other PWD discharge volume (bbl/day):

Well Name: ROJO 7811 27-22 FEDERAL COM Well Number: 56H

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:



U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Bond Info Data Report

08/02/2021

APD ID: 10400066057

Operator Name: BTA OIL PRODUCERS LLC

Well Name: ROJO 7811 27-22 FEDERAL COM

Well Type: OIL WELL

Submission Date: 12/02/2020

Highlighted data reflects the most recent changes

Show Final Text

Well Number: 56H
Well Work Type: Drill

Bond Information

Federal/Indian APD: FED

BLM Bond number: NMB001711

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment:

State of New Mexico Energy, Minerals and Natural Resources Department

Submit Electronically Via E-permitting

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description Effective May 25, 2021

I. Operator: BTA C	Dil Producers	s, LLC	_OGRID: _	260297	Date:	08 / 0	09/2021
II. Type: Original	☐ Amendment	due to □ 19.15.27.9	2.D(6)(a) NMA	C □ 19.15.27.9.D((6)(b) NMAC □	Other.	
If Other, please describe	»:						
III. Well(s): Provide the be recompleted from a s					wells proposed to	be drill	ed or proposed to
Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D		Anticipated oduced Water BBL/D
ROJO 7811 27-22 30-	025-49302	O; SEC 27; 25S; 33H	E 220 FSL,1965 FEL	+/- 800	+/- 2000	+/- 1	1200
FEDERAL COM 56H							
IV. Central Delivery P V. Anticipated Schedu proposed to be recomple	le: Provide the	gle well pad or conn	ected to a cent	ral delivery point.	vell or set of wells	s propos	
Well Name	API	Spud Date	TD Reached Date	Completion Commencement			First Production Date
ROJO 7811 27-22 3 0	-025-49302	8/9/2022	8/29/2022	9/12/2022	10/3/2	022	11/2/2022
FEDERAL COM 56H							
VI. Separation Equipment: Attach a complete description of how Operator will size separation equipment to optimize gas capture. VII. Operational Practices: Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC. VIII. Best Management Practices: Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.							

Section 2 Enhanced Plan

EFFECTIVE APRIL 1, 2022							
Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.							
☐ Operator certifies capture requirement	-	-	tion because Operator is in o	compliance with its statewide natural gas			
IX. Anticipated Nat	tural Gas Producti	on:					
Well		API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF			
X. Natural Gas Gat	hering System (NC	GGS):					
Operator System		ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in			
production operation the segment or portion the segment or portion in the segment or portion in the segment or portion in the segment or segment in the segment of the segment in the segm	s to the existing or pon of the natural gas gas. The natural gas gas rom the well prior to the compact of the c	planned interconnect of to gathering system(s) to we thering system will to the date of first product does not anticipate that above will continue to eduction in response to the terts confidentiality purs	he natural gas gathering systewhich the well(s) will be considered will not have capacity to go tion. at its existing well(s) connect meet anticipated increases in the increased line pressure. uant to Section 71-2-8 NMS 27.9 NMAC, and attaches a fixewhich which is the increased of the increased line pressure.	atticipated pipeline route(s) connecting the em(s), and the maximum daily capacity of nected. ather 100% of the anticipated natural gas red to the same segment, or portion, of the a line pressure caused by the new well(s). SA 1978 for the information provided in full description of the specific information			

Section 3 - Certifications Effective May 25, 2021

	Effective May 25, 2021					
Operator certifies that, a	fter reasonable inquiry and based on the available information at the time of submittal:					
one hundred percent of	Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport the hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, king into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or					
hundred percent of the a into account the current	able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system. box, Operator will select one of the following:					
-	Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection O of 19.15.27.9 NMAC; or					
	lan. □ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential es for the natural gas until a natural gas gathering system is available, including:					
(a)	power generation on lease;					
(b)	power generation for grid;					
(c)	compression on lease;					
(d)	liquids removal on lease;					
(e)	reinjection for underground storage;					
(f)	reinjection for temporary storage;					
(g)	reinjection for enhanced oil recovery;					
(h)	fuel cell production; and					
(i)	other alternative beneficial uses approved by the division.					

Section 4 - Notices

- 1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:
- (a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or
- (b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.
- 2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

VI. Separation Equipment: Attach a complete description of how Operator will size separation equipment to optimize gas capture.

- Separation equipment will be sized to provide adequate separation for anticipated rates.
- Separation equipment will allow for adequate retention time to allow gas and liquids to separate.
- Separation equipment will separate all three phases (Oil, Water, and Gas).
- Collection systems are appropriately sized to handle facility production rates on all (3) phases.
- Ancillary equipment and metering is selected to be serviced without flow interruptions or the need to release gas from the well.

VII. Operational Practices: Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F 19.15.27.8 NMAC.

Drilling Operations

- All flare stacks will be properly sized. The flare stacks will be located at a minimum 100' from the nearest surface hole location on the pad.
- All natural gas produced during drilling operations will be flared, unless there is an equipment
 malfunction and/or to avoid risk of an immediate and substantial adverse impact on safety and
 the environment, at which point the gas will be vented.

Completions/Recompletions Operations

- New wells will not be flowed back until they are connected to a properly sized gathering system.
- The facility will be built/sized for maximum anticipated flowrates and pressures to minimize waste.
- For flowback operations, multiple stages of separation will be used as well as VRU and blowers to make sure waste is minimized off the storage tanks and facility.
- During initial flowback, the well stream will be routed to separation equipment.
- At an existing facility, when necessary, post separation natural gas will be flared until it meets pipeline specifications, at which point it will be turned into a collection system.
- At a new facility, post separation natural gas will be vented until storage tanks can safely function, at which point it will be flared until it meets pipeline spec.

Production Operations

- Weekly AVOs will be performed on all facilities that produce more than 60 MCFD.
- Leaking thief hatches and pressure safety valves found during AVOs will be cleaned and properly re-sealed.
- All flares will be equipped with auto-ignition systems and continuous pilot operations.
- After a well is stabilized from liquid unloading, the well will be turned back into the collection system.
- All gas lift systems will be optimized to limit the amount of waste.
- All tanks will have automatic gauging equipment installed.

Performance Standards

- Production equipment will be designed to handle maximum anticipated rates and pressure.
- All flared gas will be combusted in a flare stack that is properly sized and designed to ensure proper combustion.
- All gas will have multiple points of separation to ensure no liquids enter flares, combustors, or gas sales line.
- Weekly AVOs will be performed on all wells and facilities that produce more than 60 MCFD.
- All OOOOa facilities will be filmed with an Optical Gas Imaging Thermographer camera once per month to check for fugitive emissions.

Measurement & Estimation

- All volume that is flared and vented that is not measured will be estimated.
- All measurement equipment for flared volumes will conform to API 14.10.
- All meters will be calibrated at regular intervals according to meter manufacturer recommendations.
- When metering is not practical due to low pressure/low rate, the vented or flared volume will be estimated.

VIII. Best Management Practices: Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

- During downhole well maintenance, BTA will use best management practices to vent as minimally as possible.
- Prior to the commencement of any maintenance, the tank or vessel will be isolated from the rest of the facilities.
- All valves upstream of the equipment will be closed and isolated.
- After equipment has been isolated, the equipment will be blown down to as low a pressure as possible into the collection system.
- If the equipment being maintained cannot be relieved into the collection system, it shall be released to a tank where the vapor can either be captured or combusted if possible.
- After downhole well maintenance, natural gas will be flared until it reaches pipeline specification.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 40829

CONDITIONS

Operator:	OGRID:
BTA OIL PRODUCERS, LLC	260297
104 S Pecos	Action Number:
Midland, TX 79701	40829
	Action Type:
	[C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

CONDITIONS

Created	Condition	Condition
Ву		Date
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104	8/11/2021
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or	8/11/2021
	zones and shall immediately set in cement the water protection string	