Sundry Print Report

U.S. Department of the Interior BUREAU OF LAND MANAGEMENT

Well Name: HOLYFIELD 9 FED COM Well Location: T25S / R34E / SEC 9 / County or Parish/State: LEA /

SWSE / 32.1383161 / -103.4748568

Well Number: 714H Type of Well: OIL WELL Allottee or Tribe Name:

Lease Number: NMNM16139 Unit or CA Name: Unit or CA Number:

US Well Number: 300254770000X1 Well Status: Approved Application for Operator: EOG RESOURCES

Permit to Drill INCORPORATED

Notice of Intent

Sundry ID: 2638515

Type of Submission: Notice of Intent

Type of Action: Other

Date Sundry Submitted: 10/13/2021 Time Sundry Submitted: 06:37

Date proposed operation will begin: 10/26/2021

Procedure Description: EOG respectfully requests an amendment to our approved APD for this well to reflect the following changes: Change name from #306H to #714H. Change BHL to T-25-S, R-34-E, Sec 4, 100' FNL, 1640' FEL, Lea Co., N.M. Change target formation to Wolfcamp Clastics Y. Update casing and cement program to current design.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

Wellhead_9.675_x_7.625_x_5.5_in_csg_20211013063732.pdf

 $Holy field_9_Fed_Com_714H_Sundry_Info___Rev_Name__BHL__tgt__csg_10.11.2021_20211013063721.pdf$

EOG_BLM_10M_Annular_Variance____9.625_in_20211013063656.pdf

Co_Flex_Hose_Test_Chart_20211013063652.pdf

10_M_Choke_Manifold_20211013063638.pdf

Co_Flex_Hose_Certification_20211013063645.pdf

9_5_8__36ppf_J_55_LTC_20211013063637.pdf

5.500in_20.00_VST_P110EC_VAM_SFC_20211013063637.pdf

ed by OCD: 11/4/2021 5:58:32 AM ell Name: HOLYFIELD 9 FED COM Well Location: T25S / R34E / SEC 9 / County or Parish/State: LÉ

SWSE / 32.1383161 / -103.4748568

Well Number: 714H Type of Well: OIL WELL Allottee or Tribe Name:

Lease Number: NMNM16139 **Unit or CA Name: Unit or CA Number:**

US Well Number: 300254770000X1 Well Status: Approved Application for Operator: EOG RESOURCES

> **INCORPORATED** Permit to Drill

7.625in_29.70_P110HC_FXL_20211013063637.pdf

10_M_BOP_Diagram_11_in_20211013063637.pdf

5.500in_20.00_VST_P110EC_DWC_C_IS_MS_Spec_Sheet_20211013063637.pdf

HOLYFIELD_9_FED_COM_714H_C_102_fka_306H__20211013063620.pdf

Operator Certification

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

Operator Electronic Signature: STAR HARRELL Signed on: OCT 13, 2021 06:36 AM

Name: EOG RESOURCES INCORPORATED

Title: Regulatory Specialist

Street Address: 5509 CHAMPIONS DRIVE

City: MIDLAND State: TX

Phone: (432) 848-9161

Email address: STAR_HARRELL@EOGRESOURCES.COM

Field Representative

Representative Name: Eric Brorman

Street Address: 5509 Champions Drive

City: Midland State: TX **Zip:** 79706

Phone: (432)556-1276

Email address: eric_brorman@eogresources.com

BLM Point of Contact

Signature: Chris Walls

BLM POC Name: CHRISTOPHER WALLS BLM POC Title: Petroleum Engineer

BLM POC Phone: 5752342234 BLM POC Email Address: cwalls@blm.gov

Disposition: Approved Disposition Date: 11/02/2021

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone: (575) 393-6161 Fax: (575) 393-0720 District II 811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720 1000 Rio Brazos Road, Aztec, NM 87410 Phone: (505) 334-6178 Fax: (505) 334-6170 1220 S. St. Francis Dr., Santa Fe, NM 87505

Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505

FORM C-102 Revised August 1, 2011 Submit one copy to appropriate **District Office**

AMENDED REPORT


WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-025-47700		² Pool Code 96994	³Pool Name Pitchfork Ranch; Wolfcar	mp, South
⁴ Property Code 329345			pperty Name D 9 FED COM 6Well Number 714H	
⁷ OGRID №. 7377		-	perator Name SOURCES, INC.	⁹ Elevation 3341'

¹⁰Surface Location

UL or lot no.	Section 9	Township 25-S	Range 34-E	Lot Idn —	Feet from the 200'	North/South line SOUTH	Feet from the 2638'	EAST	County LEA
	11Bottom Hole Location If Different From Surface								
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
2	4	25-S	34-E	_	100'	NORTH	1640'	EAST	LEA
12Dedicated Acres	¹³ Joint or	Infill 14Co	nsolidation Co	de ¹⁵ Ord	er No.			•	
639.56									

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

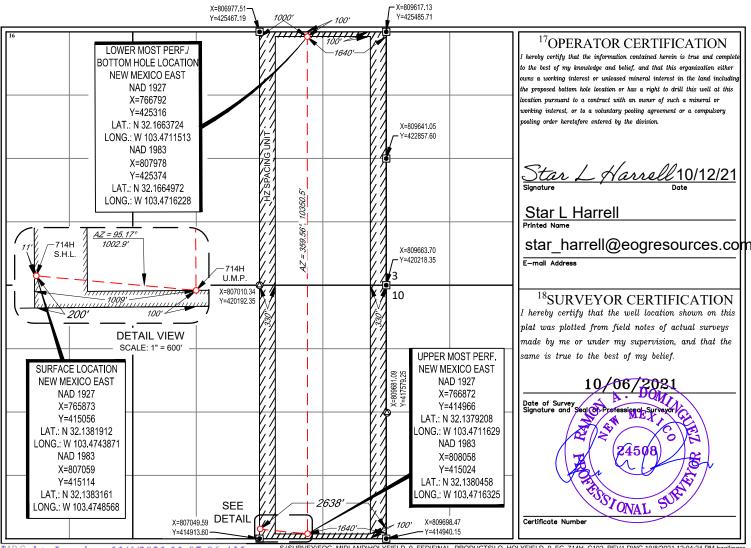

Relêased to Imaging: 11/4/2021 11:07:06 AM

SURVEY1EOG_MIDLAND\HOLYFIELD_9_FED\FINAL_PRODUCTS\LO_HOLYFIELD_9_FC_714H_C102_REV1.DWG 10/8/2021 12:04:24 PM bzolling



Holyfield 9 Fed Com 714H

Revised Permit Information 10/11/2021:

Well Name: Holyfield 9 Fed Com 714H

Location: SHL: 200' FSL & 2638' FEL, Section 9, T-25-S, R-34-E, Lea Co., N.M. BHL: 100' FNL & 1640' FEL, Section 4, T-25-S, R-34-E, Lea Co., N.M.

Casing Program:

Hole		Csg				DFmin	DFmin	DFmin
Size	Interval	OD	Weight	Grade	Conn	Collapse	Burst	Tension
12.25"	0' - 870'	9.625"	36#	J-55	LTC	1.125	1.25	1.6
8.75"	0' - 11,440'	7.625"	29.7#	HCP-110	FXL	1.125	1.25	1.6
6.75"	0' - 10,940'	5.5"	20#	P-110EC	DWC/C-IS MS	1.125	1.25	1.6
6.75"	10,940' - 11,440'	5.5"	20#	P-110EC	VAM SFC	1.125	1.25	1.6
6.75"	11,440' - 22,737'	5.5"	20#	P-110EC	DWC/C-IS MS	1.125	1.25	1.6

Variance is requested to waive the centralizer requirements for the 7-5/8" casing in the 8-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 8-3/4 hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive any centralizer requirements for the 5-1/2" casing in the 6-3/4" hole size. An expansion additive will be utilized, in the cement slurry, for the entire length of the 6-3/4" hole interval to maximize cement bond and zonal isolation.

Variance is also requested to waive the annular clearance requirements for the 5-1/2" casing by 7-5/8" casing annulus to the proposed top of cement.

EOG requests permission to allow deviation from the 0.422" annulus clearance requirement from Onshore Order #2 under the following conditions:

- Annular clearance to meet or exceed 0.422" between intermediate casing ID and production casing coupling only on the first 500' overlap between both casing strings.
- Annular clearance less than 0.422" is acceptable for the production open hole section.

Cementing Program:

		Wt.	Yld	Slurry Description
Depth	No. Sacks	ppg	Ft3/sk	Sidily Description
870' 9-5/8''	250	13.5	1.73	Lead: Class C + 4.0% Bentonite Gel + 0.5% CaCl2 + 0.25 lb/sk Cello- Flake (TOC @ Surface)
	80	14.8	1.34	Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate (TOC @ 664')
11,440' 7-5/8''	450	14.2	1.11	1st Stage (Tail): Class C + 0.6% Halad-9 + 0.45% HR-601 + 3% Microbond (TOC @ 7,660')
	1310	14.8	1.5	2nd Stage (Bradenhead squeeze): Class C + 3% Salt + 1% PreMag- M + 6% Bentonite Gel (TOC @ surface)
22,737' 5-1/2''	1000	14.2	1.31	Lead: Class H + 0.4% Halad-344 + 0.35% HR-601 + 3% Microbond (TOC @ 10,943')



Holyfield 9 Fed Com 714H

Additive	Purpose		
Bentonite Gel	Lightweight/Lost circulation prevention		
Calcium Chloride	Accelerator		
Cello-flake	Lost circulation prevention		
Sodium Metasilicate	Accelerator		
MagOx	Expansive agent		
Pre-Mag-M	Expansive agent		
Sodium Chloride	Accelerator		
FL-62	Fluid loss control		
Halad-344	Fluid loss control		
Halad-9	Fluid loss control		
HR-601	Retarder		
Microbond	Expansive Agent		

EOG requests variance from minimum standards to pump a two stage cement job on the 7-5/8" intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon (7,860') and the second stage performed as a bradenhead squeeze with planned cement from the Brushy Canyon to surface. If necessary, a top out consisting of 1,306 sacks of Class C cement + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (2.30 yld, 12.91 ppg) will be executed as a contingency. Top will be verified by Echo-meter.

EOG will include the Echo-meter verified fluid top and the volume of displacement fluid above the cement slurry in the annulus in all post-drill sundries on wells utilizing this cement program.

EOG will report to the BLM the volume of fluid (limited to 5 bbls) used to flush intermediate casing valves following backside cementing procedures.

Mud Program:

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 870'	Fresh - Gel	8.6-8.8	28-34	N/c
870' – 11,440'	Brine	10.0-10.2	28-34	N/c
11,440' - 12,064'	Oil Base	8.7-9.4	58-68	N/c - 6
12,064' – 22,737'	Oil Base	10.0-14.0	58-68	4 - 6



Holyfield 9 Fed Com 714H

Wellhead:

EOG Resources Inc. (EOG) respectfully requests a variance from the minimum standards for well control equipment testing of Onshore Order No. 2 (item III.A.2.i) to allow a testing schedule of the blow out preventer (BOP) and blow out prevention equipment (BOPE) to include the following:

- Full BOPE test at first installation on the pad.
- Full BOPE test every 30 days per Onshore Order No. 2.
- Function test BOP elements per Onshore Order No. 2.
- Break testing BOP and BOPE coupled with batch drilling operations and production sections that do not penetrate the Wolfcamp or deeper formations.
- After the well section is cemented the BOP will be disconnected from the wellhead and walked with the rig to another well on the pad. The cemented well will be secured with a blind flange and a pressure gauge for monitoring.



Holyfield 9 Fed Com 714H

200' FSL 2638' FEL **Revised Wellbore**

KB: 3366' GL: 3341'

Section 9

T-25-S, R-34-E

API: 30-025-47700

Bit Size: 12-1/4" 9-5/8", 36#, J-55, LTC, 0' - 870' Bit Size: 8-3/4" 7-5/8", 29.7#, HCP-110, FXL, 0' -11,440' TOC: 10,943' Bit Size: 6-3/4" Lateral: 22,737' MD, 12,494' TVD 5-1/2", 20#, P-110EC, DWC/C-IS MS, @ 0' -**Upper Most Perf:** 100' FSL & 1640' FEL Sec. 9 10,940' **Lower Most Perf:** 5-1/2", 20#, P-110EC, VAM SFC, @ 10,940' -100' FNL & 1640' FEL Sec. 4 BH Location: 100' FNL & 1640' FEL Sec. 4 5-1/2", 20#, P-110EC, DWC/C-IS MS, @ 11,440' -T-25-S R-34-E 22,737' KOP: 12,064'

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 60022

CONDITIONS

Operator:	OGRID:
EOG RESOURCES INC	7377
P.O. Box 2267	Action Number:
Midland, TX 79702	60022
	Action Type:
	[C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
pkautz	None	11/4/2021