

Well Name: CENTRAL BISTI UNIT	Well Location: T25N / R12W / SEC 9 / SESE / 36.409225 / 108.110458	County or Parish/State: SAN JUAN / NM
Well Number: 71	Type of Well: OIL WELL	Allottee or Tribe Name: EASTERN NAVAJO
Lease Number: 14206031228	Unit or CA Name: CENTRAL BISTI UNIT	Unit or CA Number: NMNM78386X
US Well Number: 3004505447	Well Status: Abandoned	Operator: DJR OPERATING LLC

Subsequent Report

Type of Submission: Subsequent Report

Type of Action: Plug and Abandonment

Date Sundry Submitted: 02/10/2021

Time Sundry Submitted: 09:19

Date Operation Actually Began: 10/05/2020

Actual Procedure: The subject well was Plugged & Abandoned on 10/05/20 per the attached detailed Wellbore Diagram, and Marker.

SR Attachments

Actual Procedure

Coordinates_and_Marker_20210210091909.pdf

EOWR_AsPlugged_WBD_20210210091909.pdf

Well Name: CENTRAL BISTI UNIT

Well Location: T25N / R12W / SEC 9 / SESE / 36.409225 / 108.110458

County or Parish/State: SAN JUAN / NM

Well Number: 71

Type of Well: OIL WELL

Allottee or Tribe Name: EASTERN NAVAJO

Lease Number: 14206031228

Unit or CA Name: CENTRAL BISTI UNIT

Unit or CA Number: NMNM78386X

US Well Number: 3004505447

Well Status: Abandoned

Operator: DJR OPERATING LLC

Operator Certification

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

Operator Electronic Signature: FORD

Signed on: FEB 10, 2021 09:19 AM

Name: DJR OPERATING LLC

Title: Regulatory Specialist

Street Address: 1 Road 3263

City: Aztec

State: NM

Phone: (505) 632-3476

Email address: sford@djrlc.com

Field Representative

Representative Name:

Street Address:

City:

State:

Zip:

Phone:

Email address:

BLM Point of Contact

BLM POC Name: WILLIAM F TAMBEKOU

BLM POC Title: PETROLEUM ENGINEER

BLM POC Phone: 7192698500

BLM POC Email Address: wtambekou@blm.gov

Disposition: Accepted

Disposition Date: 04/01/2021

Signature: William Max Tambekou

DJR Operating, LLC
Central Bisti Unit #079
30-045-25342
SENW F-05-25N-12W
San Juan County, NM

326° NW

36°25'55" N 108°8'12" W

Bloomfield, NM

6150 ft Elevation



P&A End of Well Report
DJR Operating, LLC
Central Bisti Unit #071
API: 30-045-05447
SESE P-9-25N-12W

Spud Date: 12/05/1955
Plugged Date: 09/11/2020

8-25-2020:

Plug 1: Gallup; TIH with 2 3/8", work string, mix and pump balanced plug of 50 sx class G cement + 2% CaCl₂ from 4738', WOC. Tagged plug at 4738'. Pressure test casing, did not test. Ran CBL from 4738' to surface.

Plug 2: Gallup; Mix and place balanced plug of 40 sx class G, WOC ON. Tagged plug at 4503'.

8-26-2020:

Pressure test casing to 600 psi, good test.

Plug 3 & 4; Mancos; Perf holes at 3660', Establish inj OK, TIH, set CR at 3634'. Pump 25 sx thru CR and outside 7" casing. Leave 2 sx under CR, sting out, place 11 sx on top of CR.

Plug 5 & 6; Mesa Verde; Perf holes at 1900', Establish inj OK, TIH, set CR at 1879'. Pump 53 sx thru CR and outside 7" casing. Leave 2 sx under CR, sting out, place 12 sx on top of CR.

Plug 7 & 8; Chacra; Perf holes at 1510', Establish inj OK, TIH, set CR at 1490'. Pump 53 sx thru CR and outside 7" casing. Leave 2 sx under CR, sting out, place 12 sx on top of CR.

9-11-2020:

Plug 9 & 10; Pictured Cliffs and Fruitland; Perf holes at 1140', Establish inj OK, TIH, set CR at 1120'.

Pump 130 sx thru CR and outside 7" casing. Leave 2 sx under CR, sting out, place 36 sx on top of CR.

Plug 11; Surface casing shoe to surface. Perf holes at 255'. Mix and pump 63 sx class G to surface.

Good cement returns. Top off cellar with 21 sx class G cement.

All cement used: Class G cement mixed at 15.8 ppg. 1.15 yield.

BLM Representative onsite to witness: Gail Clayton & William Diers

**End of Well Report
DJR Operating, LLC
Central Bisti Unit 71**

API # 30-045-05447
SE/SE, Unit P, Sec 9, T25N, R12W
San Juan County, NM

GL 6198'
KB 6209'
Spud Date 12/5/1955

SURF CSG

Hole size 15.5"
Csg Size: 10.75"
Wt: 32.75#
Grade: N/A
ID: 10.192"
Depth 205'
Csg cap ft3: 0.5666
TOC: Circ cmt to surface

FORMATION TOPS

Formation	Surface
Nacimiento	Surface
Ojo Alamo	N/A
Kirtland	N/A
Fruitland	760'
Pictured Cliffs	1110'
Chacra	1434'
Mesa Verde	1830'
Mancos	3718'
Gallup	4629'

PROD CSG

Hole size 9"
Csg Size: 7"
Wt: 23#
Grade: J-55
ID: 6.366"
Depth 4880'
Csg cap ft3: 0.2210
Csg/Csg Ann ft3: 0.2993
Csg/OH cap ft3: 0.1745
TOC: 3740'


4.5" FJ in 7" 23#	4001'
ID.	4.052"
Csg cap ft3:	0.0895

TOC 3970', TS from 1955

4.5" FJ in 7" 23# set at 4001'

Perfs 4730-4836'

FILL 4813'
TD 4880'

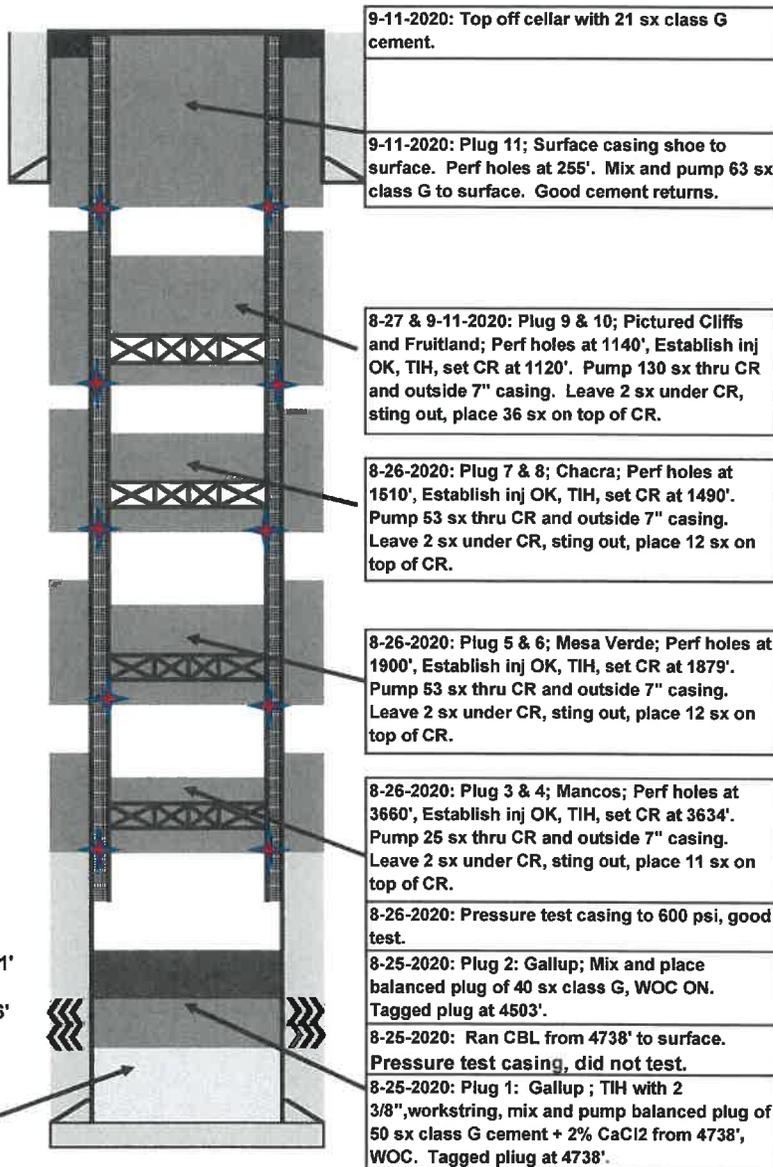

9-11-2020: Top off cellar with 21 sx class G cement.

9-11-2020: Plug 11; Surface casing shoe to surface. Perf holes at 255'. Mix and pump 63 sx class G to surface. Good cement returns.

8-27 & 9-11-2020: Plug 9 & 10; Pictured Cliffs and Fruitland; Perf holes at 1140', Establish inj OK, TIH, set CR at 1120'. Pump 130 sx thru CR and outside 7" casing. Leave 2 sx under CR, sting out, place 36 sx on top of CR.

8-26-2020: Plug 7 & 8; Chacra; Perf holes at 1610', Establish inj OK, TIH, set CR at 1490'. Pump 53 sx thru CR and outside 7" casing. Leave 2 sx under CR, sting out, place 12 sx on top of CR.

8-26-2020: Plug 5 & 6; Mesa Verde; Perf holes at 1900', Establish inj OK, TIH, set CR at 1879'. Pump 53 sx thru CR and outside 7" casing. Leave 2 sx under CR, sting out, place 12 sx on top of CR.

8-26-2020: Plug 3 & 4; Mancos; Perf holes at 3660', Establish inj OK, TIH, set CR at 3634'. Pump 25 sx thru CR and outside 7" casing. Leave 2 sx under CR, sting out, place 11 sx on top of CR.

8-26-2020: Pressure test casing to 600 psi, good test.

8-25-2020: Plug 2: Gallup; Mix and place balanced plug of 40 sx class G, WOC ON. Tagged plug at 4503'.

8-25-2020: Ran CBL from 4738' to surface. Pressure test casing, did not test.

8-25-2020: Plug 1: Gallup; TIH with 2 3/8", workstring, mix and pump balanced plug of 50 sx class G cement + 2% CaCl2 from 4738', WOC. Tagged plug at 4738'.

Regulatory representatives on site: Gail Clayton, Bill Diers, BLM
Cement used class G at 15.8 ppg, 1.15 yield
P&A finished and rig released 9-11-2020.

District I
 1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II
 811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III
 1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV
 1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS
 Action 57937

CONDITIONS

Operator: DJR OPERATING, LLC 1 Road 3263 Aztec, NM 87410	OGRID: 371838
	Action Number: 57937
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
mkuehling	None	11/15/2021