

<b>Well Name:</b> CARSON UNIT 10 COM	<b>Well Location:</b> T25N / R12W / SEC 10 / SWNE / 36.417419 / -108.094742	<b>County or Parish/State:</b> SAN JUAN / NM
<b>Well Number:</b> 332	<b>Type of Well:</b> OTHER	<b>Allottee or Tribe Name:</b>
<b>Lease Number:</b> NMNM070322	<b>Unit or CA Name:</b>	<b>Unit or CA Number:</b>
<b>US Well Number:</b> 3004527667	<b>Well Status:</b> Producing Gas Well	<b>Operator:</b> DJR OPERATING LLC

**Subsequent Report**

**Sundry ID:** 2509461

**Type of Submission:** Subsequent Report

**Type of Action:** Plug and Abandonment

**Date Sundry Submitted:** 07/23/2021

**Time Sundry Submitted:** 09:37

**Date Operation Actually Began:** 07/19/2021

**Actual Procedure:** The subject well was Plugged & Abandoned on July 19, 2021 per the attached detailed As Plugged Wellbore Diagram and Marker.

**SR Attachments**

**Actual Procedure**

PA\_Marker\_20210723093704.pdf

Carson\_Unit\_10\_Com\_332\_AsPlugged\_WBD\_20210723093704.pdf

**Well Name:** CARSON UNIT 10 COM

**Well Location:** T25N / R12W / SEC 10 / SWNE / 36.417419 / -108.094742

**County or Parish/State:** SAN JUAN / NM

**Well Number:** 332

**Type of Well:** OTHER

**Allottee or Tribe Name:**

**Lease Number:** NMNM070322

**Unit or CA Name:**

**Unit or CA Number:**

**US Well Number:** 3004527667

**Well Status:** Producing Gas Well

**Operator:** DJR OPERATING LLC

### Operator Certification

*I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.*

**Operator Electronic Signature:** SHAW-MARIE FORD

**Signed on:** JUL 23, 2021 09:37 AM

**Name:** DJR OPERATING LLC

**Title:** Regulatory Specialist

**Street Address:** 1 Road 3263

**City:** Aztec

**State:** NM

**Phone:** (505) 632-3476

**Email address:** sford@djrlc.com

### Field Representative

**Representative Name:**

**Street Address:**

**City:**

**State:**

**Zip:**

**Phone:**

**Email address:**

### BLM Point of Contact

**BLM POC Name:** KENNETH G RENNICK

**BLM POC Title:** Petroleum Engineer

**BLM POC Phone:** 5055647742

**BLM POC Email Address:** krennick@blm.gov

**Disposition:** Accepted

**Disposition Date:** 10/19/2021

**Signature:** Kenneth Rennick

**Plug and Abandonment Marker  
DJR Operating, LLC  
Carson Unit 10 Com 332  
API # 30-045-27667  
SW/NE, Unit G, Sec. 10, T25N, R12W  
San Juan County, NM**



P&A End of Well Report  
DJR Operating, LLC  
Carson Unit 10 COM #332  
API: 30-045-27667  
SWNE G-10-25N-12W

Spud Date: 03/14/1991

Plugged Date: 07/19/21

07/19/21:

Plug 1: Mix and pump 10 sx class G cement through CR into Fruitland perms.

Plugs 2 and 3: 87 sx Class G cement + 2% CaCl<sub>2</sub> from 1063'. TOOH, topped off with 10 sx class G + 2% CaCl<sub>2</sub>.

Top out plug: Mix and place 17 sx class G cement to top off surface casing and cellar

All cement used: Class G cement mixed at 15.8 ppg. 1.15 yield.

BLM Representative onsite to witness: Dustin Porch

**DJR Operating, LLC**

**End of Well report**

**Carson Unit 10 Com 332**

API # 30-045-27667

SW/NE, Unit G, Sec 10, T25N, R12W  
San Juan County, NM

GL 6231'

KB N/A

Spud Date 3/14/1990

**SURF CSG**

Hole size 8.75"

Csg Size: 7"

Wt: 20#

Grade: J-55

ID: 6.331"

Depth 123'

casing cap ft3/ft: 0.2273

TOC: Cmt back-filled to surface

**FORMATION TOPS**

Nacimiento	Surface
Ojo Alamo	N/A
Kirtland	N/A
Fruitland	1094'
Pictured Cliffs	1118'

**PROD CSG**

Hole size 6.25"

Csg Size: 4.5"

Wt: 10.5#

Grade: J-55

ID: 4.052"

Depth 1228'


casing cap ft3/ft: 0.0895

7x4.5 cap ft3/ft 0.1169

TOC: Circ cmt to surface

Cement Ret. 1063'  
Fruitland Coal perms  
1094-1114'

PBTD 1194'  
TD 1250'

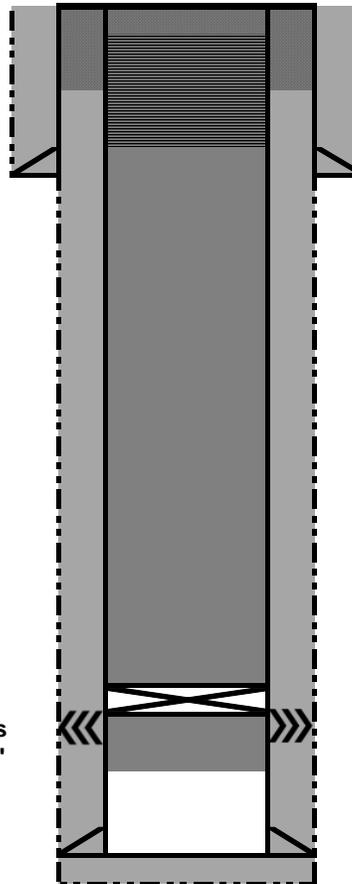

7/19/21: Top out plug: Mix and place 17 sx class G cement to top off surface casing and cellar

Plugs 2 and 3: 87 sx Class G cement + 2% CaCl2 from 1063'. TOOH, topped off with 10 sx class G + 2% CaCl2.

Plug 1: Mix and pump 10 sx class G cement through CR into Fruitland perms.

All cement used was class G cement mixed at 15.8 ppg, yield 1.15

GPS Coordinates: Lat: 36.4174180990085, Lng: -108.09554331935942

Regulatory Representative: Dustin Porch, BLM

**District I**  
 1625 N. French Dr., Hobbs, NM 88240  
 Phone:(575) 393-6161 Fax:(575) 393-0720

**District II**  
 811 S. First St., Artesia, NM 88210  
 Phone:(575) 748-1283 Fax:(575) 748-9720

**District III**  
 1000 Rio Brazos Rd., Aztec, NM 87410  
 Phone:(505) 334-6178 Fax:(505) 334-6170

**District IV**  
 1220 S. St Francis Dr., Santa Fe, NM 87505  
 Phone:(505) 476-3470 Fax:(505) 476-3462

**State of New Mexico**  
**Energy, Minerals and Natural Resources**  
**Oil Conservation Division**  
**1220 S. St Francis Dr.**  
**Santa Fe, NM 87505**

CONDITIONS  
 Action 58294

**CONDITIONS**

Operator: DJR OPERATING, LLC 1 Road 3263 Aztec, NM 87410	OGRID: 371838
	Action Number: 58294
	Action Type: [C-103] Sub. Plugging (C-103P)

**CONDITIONS**

Created By	Condition	Condition Date
mkuehling	None	11/15/2021