

Submit 1 Copy To Appropriate District

Office

District I – (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II – (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III – (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV – (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM
 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

WELL API NO. 30-015-48316
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No. 322721
7. Lease Name or Unit Agreement Name Golden Graham 1 State Com
8. Well Number 725H
9. OGRID Number 7377
10. Pool name or Wildcat 98220 Purple Sage; Wolfcamp (Gas)

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐	
2. Name of Operator EOG Resources, Inc.	
3. Address of Operator P.O. Box 2267, Midland, Texas 79702	
4. Well Location Unit Letter <u>N</u> : <u>215</u> feet from the <u>South</u> line and <u>1829</u> feet from the West line Section <u>1</u> <u>26S</u> Township <u>28E</u> Range <u>NMNM</u> Eddy County	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 2934' GR	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☐	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☒	COMMENCE DRILLING OPNS. ☐	P AND A ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASING/CEMENT JOB ☐	
DOWNHOLE COMMINGLE ☐			
CLOSED-LOOP SYSTEM ☐			
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

EOG respectfully requests an amendment to our approved APD for this well to reflect the following changes:

Update casing and cement program to current design.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Star L Harrell TITLE Sr Regulatory Specialist DATE 11/9/2021

Type or print name Star Harrell E-mail address: star_harrell@eogresources.com PHONE: 432-848-9161

For State Use Only

APPROVED BY: _____ TITLE _____ DATE _____
 Conditions of Approval (if any): _____



Midland

Eddy County, NM (NAD 83 NME)

Golden Graham 1 State Com

#725H

76376

OH

Plan: Plan #0.3

Standard Survey Report

09 November, 2021



EOG Resources

Survey Report

Company:	Midland	Local Co-ordinate Reference:	Well #725H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB = 26' @ 2960.0usft
Site:	Golden Graham 1 State Com	MD Reference:	KB = 26' @ 2960.0usft
Well:	#725H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Plan #0.3	Database:	PEDM

Project	Eddy County, NM (NAD 83 NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Golden Graham 1 State Com		
Site Position:		Northing:	387,494.00 usft
From:	Map	Easting:	630,031.00 usft
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "
		Latitude:	32.0649774°N
		Longitude:	104.0470127°W

Well	#725H		
Well Position	+N/-S	0.0 usft	Northing:
	+E/-W	0.0 usft	Easting:
Position Uncertainty	0.0 usft	Wellhead Elevation:	usft
Grid Convergence:	0.15 °	Latitude:	32.0649444°N
		Longitude:	104.0433649°W
		Ground Level:	2,934.0 usft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2020	11/15/2021	6.70	59.67	47,311.16473846

Design	Plan #0.3				
Audit Notes:					
Version:	Phase:	PROTOTYPE	Tie On Depth:	0.0	
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.0	0.0	0.0	3.81	

Survey Tool Program	Date	11/9/2021			
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description	
0.0	20,073.1	Plan #0.3 (OH)	EOG MWD+IFR1	MWD + IFR1	

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00	
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00	
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00	
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00	
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00	
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00	
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00	
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00	
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00	
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00	



EOG Resources

Survey Report

Company:	Midland	Local Co-ordinate Reference:	Well #725H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB = 26' @ 2960.0usft
Site:	Golden Graham 1 State Com	MD Reference:	KB = 26' @ 2960.0usft
Well:	#725H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Plan #0.3	Database:	PEDM

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	2.00	104.18	1,500.0	-0.4	1.7	-0.3	2.00	2.00	0.00
1,600.0	4.00	104.18	1,599.8	-1.7	6.8	-1.3	2.00	2.00	0.00
1,700.0	6.00	104.18	1,699.5	-3.8	15.2	-2.8	2.00	2.00	0.00
1,800.0	8.00	104.18	1,798.7	-6.8	27.0	-5.0	2.00	2.00	0.00
1,900.0	10.00	104.18	1,897.5	-10.7	42.2	-7.8	2.00	2.00	0.00
2,000.0	12.00	104.18	1,995.6	-15.3	60.7	-11.3	2.00	2.00	0.00
2,090.1	13.80	104.18	2,083.5	-20.3	80.2	-14.9	2.00	2.00	0.00
2,100.0	13.80	104.18	2,093.1	-20.8	82.5	-15.3	0.00	0.00	0.00
2,200.0	13.80	104.18	2,190.2	-26.7	105.6	-19.6	0.00	0.00	0.00
2,300.0	13.80	104.18	2,287.3	-32.5	128.7	-23.9	0.00	0.00	0.00
2,400.0	13.80	104.18	2,384.4	-38.4	151.9	-28.2	0.00	0.00	0.00
2,500.0	13.80	104.18	2,481.5	-44.2	175.0	-32.5	0.00	0.00	0.00
2,600.0	13.80	104.18	2,578.6	-50.1	198.1	-36.8	0.00	0.00	0.00
2,700.0	13.80	104.18	2,675.7	-55.9	221.3	-41.1	0.00	0.00	0.00
2,800.0	13.80	104.18	2,772.8	-61.8	244.4	-45.4	0.00	0.00	0.00
2,900.0	13.80	104.18	2,870.0	-67.6	267.5	-49.7	0.00	0.00	0.00
3,000.0	13.80	104.18	2,967.1	-73.4	290.7	-53.9	0.00	0.00	0.00
3,100.0	13.80	104.18	3,064.2	-79.3	313.8	-58.2	0.00	0.00	0.00
3,200.0	13.80	104.18	3,161.3	-85.1	336.9	-62.5	0.00	0.00	0.00
3,300.0	13.80	104.18	3,258.4	-91.0	360.1	-66.8	0.00	0.00	0.00
3,400.0	13.80	104.18	3,355.5	-96.8	383.2	-71.1	0.00	0.00	0.00
3,500.0	13.80	104.18	3,452.6	-102.7	406.3	-75.4	0.00	0.00	0.00
3,600.0	13.80	104.18	3,549.7	-108.5	429.5	-79.7	0.00	0.00	0.00
3,700.0	13.80	104.18	3,646.9	-114.4	452.6	-84.0	0.00	0.00	0.00
3,800.0	13.80	104.18	3,744.0	-120.2	475.7	-88.3	0.00	0.00	0.00
3,900.0	13.80	104.18	3,841.1	-126.0	498.9	-92.6	0.00	0.00	0.00
4,000.0	13.80	104.18	3,938.2	-131.9	522.0	-96.9	0.00	0.00	0.00
4,100.0	13.80	104.18	4,035.3	-137.7	545.1	-101.2	0.00	0.00	0.00
4,200.0	13.80	104.18	4,132.4	-143.6	568.2	-105.5	0.00	0.00	0.00
4,219.7	13.80	104.18	4,151.5	-144.7	572.8	-106.3	0.00	0.00	0.00
4,300.0	12.20	104.18	4,229.8	-149.2	590.3	-109.6	2.00	-2.00	0.00
4,400.0	10.20	104.18	4,327.9	-153.9	609.1	-113.1	2.00	-2.00	0.00
4,500.0	8.20	104.18	4,426.6	-157.8	624.6	-115.9	2.00	-2.00	0.00
4,600.0	6.20	104.18	4,525.8	-160.9	636.8	-118.2	2.00	-2.00	0.00
4,700.0	4.20	104.18	4,625.4	-163.1	645.6	-119.8	2.00	-2.00	0.00
4,800.0	2.20	104.18	4,725.2	-164.5	651.0	-120.8	2.00	-2.00	0.00
4,909.8	0.00	0.01	4,835.0	-165.0	653.0	-121.2	2.00	-2.00	0.00
5,000.0	0.00	0.00	4,925.2	-165.0	653.0	-121.2	0.00	0.00	0.00



EOG Resources

Survey Report

Company:	Midland	Local Co-ordinate Reference:	Well #725H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB = 26' @ 2960.0usft
Site:	Golden Graham 1 State Com	MD Reference:	KB = 26' @ 2960.0usft
Well:	#725H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Plan #0.3	Database:	PEDM

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,100.0	0.00	0.00	5,025.2	-165.0	653.0	-121.2	0.00	0.00	0.00
5,200.0	0.00	0.00	5,125.2	-165.0	653.0	-121.2	0.00	0.00	0.00
5,300.0	0.00	0.00	5,225.2	-165.0	653.0	-121.2	0.00	0.00	0.00
5,400.0	0.00	0.00	5,325.2	-165.0	653.0	-121.2	0.00	0.00	0.00
5,500.0	0.00	0.00	5,425.2	-165.0	653.0	-121.2	0.00	0.00	0.00
5,600.0	0.00	0.00	5,525.2	-165.0	653.0	-121.2	0.00	0.00	0.00
5,700.0	0.00	0.00	5,625.2	-165.0	653.0	-121.2	0.00	0.00	0.00
5,800.0	0.00	0.00	5,725.2	-165.0	653.0	-121.2	0.00	0.00	0.00
5,900.0	0.00	0.00	5,825.2	-165.0	653.0	-121.2	0.00	0.00	0.00
6,000.0	0.00	0.00	5,925.2	-165.0	653.0	-121.2	0.00	0.00	0.00
6,100.0	0.00	0.00	6,025.2	-165.0	653.0	-121.2	0.00	0.00	0.00
6,200.0	0.00	0.00	6,125.2	-165.0	653.0	-121.2	0.00	0.00	0.00
6,300.0	0.00	0.00	6,225.2	-165.0	653.0	-121.2	0.00	0.00	0.00
6,400.0	0.00	0.00	6,325.2	-165.0	653.0	-121.2	0.00	0.00	0.00
6,500.0	0.00	0.00	6,425.2	-165.0	653.0	-121.2	0.00	0.00	0.00
6,600.0	0.00	0.00	6,525.2	-165.0	653.0	-121.2	0.00	0.00	0.00
6,700.0	0.00	0.00	6,625.2	-165.0	653.0	-121.2	0.00	0.00	0.00
6,800.0	0.00	0.00	6,725.2	-165.0	653.0	-121.2	0.00	0.00	0.00
6,900.0	0.00	0.00	6,825.2	-165.0	653.0	-121.2	0.00	0.00	0.00
7,000.0	0.00	0.00	6,925.2	-165.0	653.0	-121.2	0.00	0.00	0.00
7,100.0	0.00	0.00	7,025.2	-165.0	653.0	-121.2	0.00	0.00	0.00
7,200.0	0.00	0.00	7,125.2	-165.0	653.0	-121.2	0.00	0.00	0.00
7,300.0	0.00	0.00	7,225.2	-165.0	653.0	-121.2	0.00	0.00	0.00
7,400.0	0.00	0.00	7,325.2	-165.0	653.0	-121.2	0.00	0.00	0.00
7,500.0	0.00	0.00	7,425.2	-165.0	653.0	-121.2	0.00	0.00	0.00
7,600.0	0.00	0.00	7,525.2	-165.0	653.0	-121.2	0.00	0.00	0.00
7,700.0	0.00	0.00	7,625.2	-165.0	653.0	-121.2	0.00	0.00	0.00
7,800.0	0.00	0.00	7,725.2	-165.0	653.0	-121.2	0.00	0.00	0.00
7,900.0	0.00	0.00	7,825.2	-165.0	653.0	-121.2	0.00	0.00	0.00
8,000.0	0.00	0.00	7,925.2	-165.0	653.0	-121.2	0.00	0.00	0.00
8,100.0	0.00	0.00	8,025.2	-165.0	653.0	-121.2	0.00	0.00	0.00
8,200.0	0.00	0.00	8,125.2	-165.0	653.0	-121.2	0.00	0.00	0.00
8,300.0	0.00	0.00	8,225.2	-165.0	653.0	-121.2	0.00	0.00	0.00
8,400.0	0.00	0.00	8,325.2	-165.0	653.0	-121.2	0.00	0.00	0.00
8,500.0	0.00	0.00	8,425.2	-165.0	653.0	-121.2	0.00	0.00	0.00
8,600.0	0.00	0.00	8,525.2	-165.0	653.0	-121.2	0.00	0.00	0.00
8,700.0	0.00	0.00	8,625.2	-165.0	653.0	-121.2	0.00	0.00	0.00
8,800.0	0.00	0.00	8,725.2	-165.0	653.0	-121.2	0.00	0.00	0.00
8,900.0	0.00	0.00	8,825.2	-165.0	653.0	-121.2	0.00	0.00	0.00
9,000.0	0.00	0.00	8,925.2	-165.0	653.0	-121.2	0.00	0.00	0.00
9,100.0	0.00	0.00	9,025.2	-165.0	653.0	-121.2	0.00	0.00	0.00
9,200.0	0.00	0.00	9,125.2	-165.0	653.0	-121.2	0.00	0.00	0.00
9,300.0	0.00	0.00	9,225.2	-165.0	653.0	-121.2	0.00	0.00	0.00



EOG Resources

Survey Report

Company:	Midland	Local Co-ordinate Reference:	Well #725H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB = 26' @ 2960.0usft
Site:	Golden Graham 1 State Com	MD Reference:	KB = 26' @ 2960.0usft
Well:	#725H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Plan #0.3	Database:	PEDM

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
9,406.3	0.00	0.01	9,331.5	-165.0	653.0	-121.2	0.00	0.00	0.00	
KOP(GG 1 SC #725H)										
9,425.0	2.24	0.16	9,350.2	-164.6	653.0	-120.8	12.00	12.00	0.00	
9,450.0	5.24	0.16	9,375.1	-163.0	653.0	-119.2	12.00	12.00	0.00	
9,475.0	8.24	0.16	9,400.0	-160.1	653.0	-116.3	12.00	12.00	0.00	
9,500.0	11.24	0.16	9,424.6	-155.8	653.0	-112.0	12.00	12.00	0.00	
9,525.0	14.24	0.16	9,449.0	-150.3	653.0	-106.5	12.00	12.00	0.00	
9,550.0	17.24	0.16	9,473.0	-143.5	653.1	-99.8	12.00	12.00	0.00	
9,575.0	20.24	0.16	9,496.7	-135.5	653.1	-91.8	12.00	12.00	0.00	
9,600.0	23.24	0.16	9,519.9	-126.2	653.1	-82.5	12.00	12.00	0.00	
9,625.0	26.24	0.16	9,542.6	-115.8	653.1	-72.1	12.00	12.00	0.00	
9,650.0	29.24	0.16	9,564.7	-104.1	653.2	-60.5	12.00	12.00	0.00	
9,675.0	32.24	0.16	9,586.2	-91.4	653.2	-47.7	12.00	12.00	0.00	
9,700.0	35.24	0.16	9,607.0	-77.5	653.2	-33.9	12.00	12.00	0.00	
9,725.0	38.24	0.16	9,627.0	-62.5	653.3	-18.9	12.00	12.00	0.00	
9,750.0	41.24	0.16	9,646.3	-46.6	653.3	-3.0	12.00	12.00	0.00	
9,775.0	44.24	0.16	9,664.6	-29.6	653.4	13.9	12.00	12.00	0.00	
9,800.0	47.24	0.16	9,682.1	-11.7	653.4	31.8	12.00	12.00	0.00	
9,825.0	50.24	0.16	9,698.6	7.1	653.5	50.6	12.00	12.00	0.00	
9,850.0	53.24	0.16	9,714.0	26.7	653.5	70.2	12.00	12.00	0.00	
9,875.0	56.24	0.16	9,728.5	47.2	653.6	90.5	12.00	12.00	0.00	
9,900.0	59.24	0.16	9,741.8	68.3	653.7	111.6	12.00	12.00	0.00	
9,925.0	62.24	0.16	9,754.0	90.1	653.7	133.4	12.00	12.00	0.00	
9,950.0	65.24	0.16	9,765.1	112.5	653.8	155.8	12.00	12.00	0.00	
9,966.9	67.27	0.16	9,771.9	128.0	653.8	171.2	12.00	12.00	0.00	
FTP(GG 1 SC #725H)										
9,975.0	68.24	0.16	9,775.0	135.5	653.8	178.7	12.00	12.00	0.00	
10,000.0	71.24	0.16	9,783.6	158.9	653.9	202.1	12.00	12.00	0.00	
10,025.0	74.24	0.16	9,791.0	182.8	654.0	225.9	12.00	12.00	0.00	
10,050.0	77.24	0.16	9,797.2	207.0	654.0	250.1	12.00	12.00	0.00	
10,075.0	80.24	0.16	9,802.1	231.5	654.1	274.5	12.00	12.00	0.00	
10,100.0	83.24	0.16	9,805.6	256.3	654.2	299.2	12.00	12.00	0.00	
10,125.0	86.24	0.16	9,807.9	281.2	654.2	324.1	12.00	12.00	0.00	
10,150.0	89.24	0.16	9,808.9	306.2	654.3	349.0	12.00	12.00	0.00	
10,153.3	89.64	0.16	9,809.0	309.4	654.3	352.3	12.00	12.00	0.00	
10,200.0	89.64	0.16	9,809.3	356.2	654.5	398.9	0.00	0.00	0.00	
10,300.0	89.64	0.16	9,809.9	456.2	654.7	498.7	0.00	0.00	0.00	
10,400.0	89.64	0.16	9,810.5	556.1	655.0	598.5	0.00	0.00	0.00	
10,500.0	89.64	0.16	9,811.2	656.1	655.3	698.3	0.00	0.00	0.00	
10,600.0	89.64	0.16	9,811.8	756.1	655.6	798.1	0.00	0.00	0.00	
10,700.0	89.64	0.16	9,812.4	856.1	655.8	897.9	0.00	0.00	0.00	
10,800.0	89.64	0.16	9,813.1	956.1	656.1	997.7	0.00	0.00	0.00	
10,900.0	89.64	0.16	9,813.7	1,056.1	656.4	1,097.5	0.00	0.00	0.00	
11,000.0	89.64	0.16	9,814.3	1,156.1	656.7	1,197.3	0.00	0.00	0.00	



EOG Resources

Survey Report

Company:	Midland	Local Co-ordinate Reference:	Well #725H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB = 26' @ 2960.0usft
Site:	Golden Graham 1 State Com	MD Reference:	KB = 26' @ 2960.0usft
Well:	#725H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Plan #0.3	Database:	PEDM

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
11,100.0	89.64	0.16	9,815.0	1,256.1	657.0	1,297.1	0.00	0.00	0.00	
11,200.0	89.64	0.16	9,815.6	1,356.1	657.2	1,396.8	0.00	0.00	0.00	
11,300.0	89.64	0.16	9,816.2	1,456.1	657.5	1,496.6	0.00	0.00	0.00	
11,400.0	89.64	0.16	9,816.9	1,556.1	657.8	1,596.4	0.00	0.00	0.00	
11,500.0	89.64	0.16	9,817.5	1,656.1	658.1	1,696.2	0.00	0.00	0.00	
11,600.0	89.64	0.16	9,818.1	1,756.1	658.4	1,796.0	0.00	0.00	0.00	
11,700.0	89.64	0.16	9,818.8	1,856.1	658.6	1,895.8	0.00	0.00	0.00	
11,800.0	89.64	0.16	9,819.4	1,956.1	658.9	1,995.6	0.00	0.00	0.00	
11,900.0	89.64	0.16	9,820.1	2,056.1	659.2	2,095.4	0.00	0.00	0.00	
12,000.0	89.64	0.16	9,820.7	2,156.1	659.5	2,195.2	0.00	0.00	0.00	
12,100.0	89.64	0.16	9,821.3	2,256.1	659.8	2,295.0	0.00	0.00	0.00	
12,200.0	89.64	0.16	9,822.0	2,356.1	660.0	2,394.8	0.00	0.00	0.00	
12,300.0	89.64	0.16	9,822.6	2,456.1	660.3	2,494.6	0.00	0.00	0.00	
12,400.0	89.64	0.16	9,823.2	2,556.1	660.6	2,594.4	0.00	0.00	0.00	
12,500.0	89.64	0.16	9,823.9	2,656.1	660.9	2,694.2	0.00	0.00	0.00	
12,600.0	89.64	0.16	9,824.5	2,756.1	661.2	2,794.0	0.00	0.00	0.00	
12,700.0	89.64	0.16	9,825.1	2,856.1	661.4	2,893.8	0.00	0.00	0.00	
12,800.0	89.64	0.16	9,825.8	2,956.1	661.7	2,993.6	0.00	0.00	0.00	
12,900.0	89.64	0.16	9,826.4	3,056.1	662.0	3,093.4	0.00	0.00	0.00	
13,000.0	89.64	0.16	9,827.0	3,156.1	662.3	3,193.2	0.00	0.00	0.00	
13,100.0	89.64	0.16	9,827.7	3,256.1	662.5	3,292.9	0.00	0.00	0.00	
13,200.0	89.64	0.16	9,828.3	3,356.1	662.8	3,392.7	0.00	0.00	0.00	
13,300.0	89.64	0.16	9,829.0	3,456.1	663.1	3,492.5	0.00	0.00	0.00	
13,400.0	89.64	0.16	9,829.6	3,556.1	663.4	3,592.3	0.00	0.00	0.00	
13,500.0	89.64	0.16	9,830.2	3,656.1	663.7	3,692.1	0.00	0.00	0.00	
13,600.0	89.64	0.16	9,830.9	3,756.1	663.9	3,791.9	0.00	0.00	0.00	
13,700.0	89.64	0.16	9,831.5	3,856.1	664.2	3,891.7	0.00	0.00	0.00	
13,800.0	89.64	0.16	9,832.1	3,956.1	664.5	3,991.5	0.00	0.00	0.00	
13,900.0	89.64	0.16	9,832.8	4,056.1	664.8	4,091.3	0.00	0.00	0.00	
14,000.0	89.64	0.16	9,833.4	4,156.1	665.1	4,191.1	0.00	0.00	0.00	
14,100.0	89.64	0.16	9,834.0	4,256.1	665.3	4,290.9	0.00	0.00	0.00	
14,200.0	89.64	0.16	9,834.7	4,356.1	665.6	4,390.7	0.00	0.00	0.00	
14,300.0	89.64	0.16	9,835.3	4,456.1	665.9	4,490.5	0.00	0.00	0.00	
14,400.0	89.64	0.16	9,835.9	4,556.1	666.2	4,590.3	0.00	0.00	0.00	
14,500.0	89.64	0.16	9,836.6	4,656.1	666.5	4,690.1	0.00	0.00	0.00	
14,600.0	89.64	0.16	9,837.2	4,756.0	666.7	4,789.9	0.00	0.00	0.00	
14,700.0	89.64	0.16	9,837.9	4,856.0	667.0	4,889.7	0.00	0.00	0.00	
14,800.0	89.64	0.16	9,838.5	4,956.0	667.3	4,989.5	0.00	0.00	0.00	
14,900.0	89.64	0.16	9,839.1	5,056.0	667.6	5,089.3	0.00	0.00	0.00	
15,000.0	89.64	0.16	9,839.8	5,156.0	667.8	5,189.0	0.00	0.00	0.00	
15,100.0	89.64	0.16	9,840.4	5,256.0	668.1	5,288.8	0.00	0.00	0.00	
15,200.0	89.64	0.16	9,841.0	5,356.0	668.4	5,388.6	0.00	0.00	0.00	
15,300.0	89.64	0.16	9,841.7	5,456.0	668.7	5,488.4	0.00	0.00	0.00	



EOG Resources

Survey Report

Company:	Midland	Local Co-ordinate Reference:	Well #725H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB = 26' @ 2960.0usft
Site:	Golden Graham 1 State Com	MD Reference:	KB = 26' @ 2960.0usft
Well:	#725H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Plan #0.3	Database:	PEDM

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
15,400.0	89.64	0.16	9,842.3	5,556.0	669.0	5,588.2	0.00	0.00	0.00
15,500.0	89.64	0.16	9,842.9	5,656.0	669.2	5,688.0	0.00	0.00	0.00
15,600.0	89.64	0.16	9,843.6	5,756.0	669.5	5,787.8	0.00	0.00	0.00
15,700.0	89.64	0.16	9,844.2	5,856.0	669.8	5,887.6	0.00	0.00	0.00
15,800.0	89.64	0.16	9,844.8	5,956.0	670.1	5,987.4	0.00	0.00	0.00
15,900.0	89.64	0.16	9,845.5	6,056.0	670.4	6,087.2	0.00	0.00	0.00
16,000.0	89.64	0.16	9,846.1	6,156.0	670.6	6,187.0	0.00	0.00	0.00
16,100.0	89.64	0.16	9,846.7	6,256.0	670.9	6,286.8	0.00	0.00	0.00
16,200.0	89.64	0.16	9,847.4	6,356.0	671.2	6,386.6	0.00	0.00	0.00
16,300.0	89.64	0.16	9,848.0	6,456.0	671.5	6,486.4	0.00	0.00	0.00
16,400.0	89.64	0.16	9,848.7	6,556.0	671.8	6,586.2	0.00	0.00	0.00
16,500.0	89.64	0.16	9,849.3	6,656.0	672.0	6,686.0	0.00	0.00	0.00
16,600.0	89.64	0.16	9,849.9	6,756.0	672.3	6,785.8	0.00	0.00	0.00
16,700.0	89.64	0.16	9,850.6	6,856.0	672.6	6,885.6	0.00	0.00	0.00
16,800.0	89.64	0.16	9,851.2	6,956.0	672.9	6,985.3	0.00	0.00	0.00
16,900.0	89.64	0.16	9,851.8	7,056.0	673.1	7,085.1	0.00	0.00	0.00
17,000.0	89.64	0.16	9,852.5	7,156.0	673.4	7,184.9	0.00	0.00	0.00
17,100.0	89.64	0.16	9,853.1	7,256.0	673.7	7,284.7	0.00	0.00	0.00
17,200.0	89.64	0.16	9,853.7	7,356.0	674.0	7,384.5	0.00	0.00	0.00
17,300.0	89.64	0.16	9,854.4	7,456.0	674.3	7,484.3	0.00	0.00	0.00
17,400.0	89.64	0.16	9,855.0	7,556.0	674.5	7,584.1	0.00	0.00	0.00
17,500.0	89.64	0.16	9,855.6	7,656.0	674.8	7,683.9	0.00	0.00	0.00
17,600.0	89.64	0.16	9,856.3	7,756.0	675.1	7,783.7	0.00	0.00	0.00
17,700.0	89.64	0.16	9,856.9	7,856.0	675.4	7,883.5	0.00	0.00	0.00
17,800.0	89.64	0.16	9,857.6	7,956.0	675.7	7,983.3	0.00	0.00	0.00
17,900.0	89.64	0.16	9,858.2	8,056.0	675.9	8,083.1	0.00	0.00	0.00
18,000.0	89.64	0.16	9,858.8	8,156.0	676.2	8,182.9	0.00	0.00	0.00
18,100.0	89.64	0.16	9,859.5	8,256.0	676.5	8,282.7	0.00	0.00	0.00
18,200.0	89.64	0.16	9,860.1	8,356.0	676.8	8,382.5	0.00	0.00	0.00
18,300.0	89.64	0.16	9,860.7	8,456.0	677.1	8,482.3	0.00	0.00	0.00
18,400.0	89.64	0.16	9,861.4	8,556.0	677.3	8,582.1	0.00	0.00	0.00
18,500.0	89.64	0.16	9,862.0	8,656.0	677.6	8,681.9	0.00	0.00	0.00
18,600.0	89.64	0.16	9,862.6	8,756.0	677.9	8,781.7	0.00	0.00	0.00
18,700.0	89.64	0.16	9,863.3	8,855.9	678.2	8,881.4	0.00	0.00	0.00
18,800.0	89.64	0.16	9,863.9	8,955.9	678.4	8,981.2	0.00	0.00	0.00
18,900.0	89.64	0.16	9,864.5	9,055.9	678.7	9,081.0	0.00	0.00	0.00
19,000.0	89.64	0.16	9,865.2	9,155.9	679.0	9,180.8	0.00	0.00	0.00
19,100.0	89.64	0.16	9,865.8	9,255.9	679.3	9,280.6	0.00	0.00	0.00
19,200.0	89.64	0.16	9,866.5	9,355.9	679.6	9,380.4	0.00	0.00	0.00
19,300.0	89.64	0.16	9,867.1	9,455.9	679.8	9,480.2	0.00	0.00	0.00
19,400.0	89.64	0.16	9,867.7	9,555.9	680.1	9,580.0	0.00	0.00	0.00
19,500.0	89.64	0.16	9,868.4	9,655.9	680.4	9,679.8	0.00	0.00	0.00
19,600.0	89.64	0.16	9,869.0	9,755.9	680.7	9,779.6	0.00	0.00	0.00
19,700.0	89.64	0.16	9,869.6	9,855.9	681.0	9,879.4	0.00	0.00	0.00



EOG Resources

Survey Report

Company:	Midland	Local Co-ordinate Reference:	Well #725H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB = 26' @ 2960.0usft
Site:	Golden Graham 1 State Com	MD Reference:	KB = 26' @ 2960.0usft
Well:	#725H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Plan #0.3	Database:	PEDM

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
19,800.0	89.64	0.16	9,870.3	9,955.9	681.2	9,979.2	0.00	0.00	0.00
19,900.0	89.64	0.16	9,870.9	10,055.9	681.5	10,079.0	0.00	0.00	0.00
20,000.0	89.64	0.16	9,871.5	10,155.9	681.8	10,178.8	0.00	0.00	0.00
20,073.1	89.64	0.16	9,872.0	10,229.0	682.0	10,251.7	0.00	0.00	0.00
PBHL(GG 1 SC #725H)									

Design Targets									
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
KOP(GG 1 SC #725H)	0.00	0.01	9,331.5	-165.0	653.0	387,320.00	631,814.00	32.0644860°N	104.0412584°W
- hit/miss target									
- Shape									
- Polygon									
Point 1			9,331.5	50.0	-60.0	387,370.01	631,754.00		
Point 2			9,331.5	50.0	60.0	387,369.99	631,874.00		
Point 3			9,331.5	-30.0	60.0	387,289.99	631,874.00		
Point 4			9,331.5	-30.0	-60.0	387,290.01	631,754.00		
FTP(GG 1 SC #725H)	0.00	0.01	9,809.0	112.0	653.0	387,597.00	631,814.00	32.0652474°N	104.0412559°W
- plan misses target center by 40.4usft at 9966.9usft MD (9771.9 TVD, 128.0 N, 653.8 E)									
- Point									
PBHL(GG 1 SC #725H)	90.00	0.10	9,872.0	10,229.0	682.0	397,714.00	631,843.00	32.0930582°N	104.0410738°W
- plan hits target center									
- Rectangle (sides W60.0 H0.0 D10,007.6)									

Checked By: _____	Approved By: _____	Date: _____
-------------------	--------------------	-------------



Golden Graham 1 State Com #725H

Eddy County, New Mexico

Proposed Wellbore

Design A

KB: 2958'

GL: 2933'


215' FSL

1829' FWL

Section 1

T-26-S, R-28-E

API: 30-015-48316

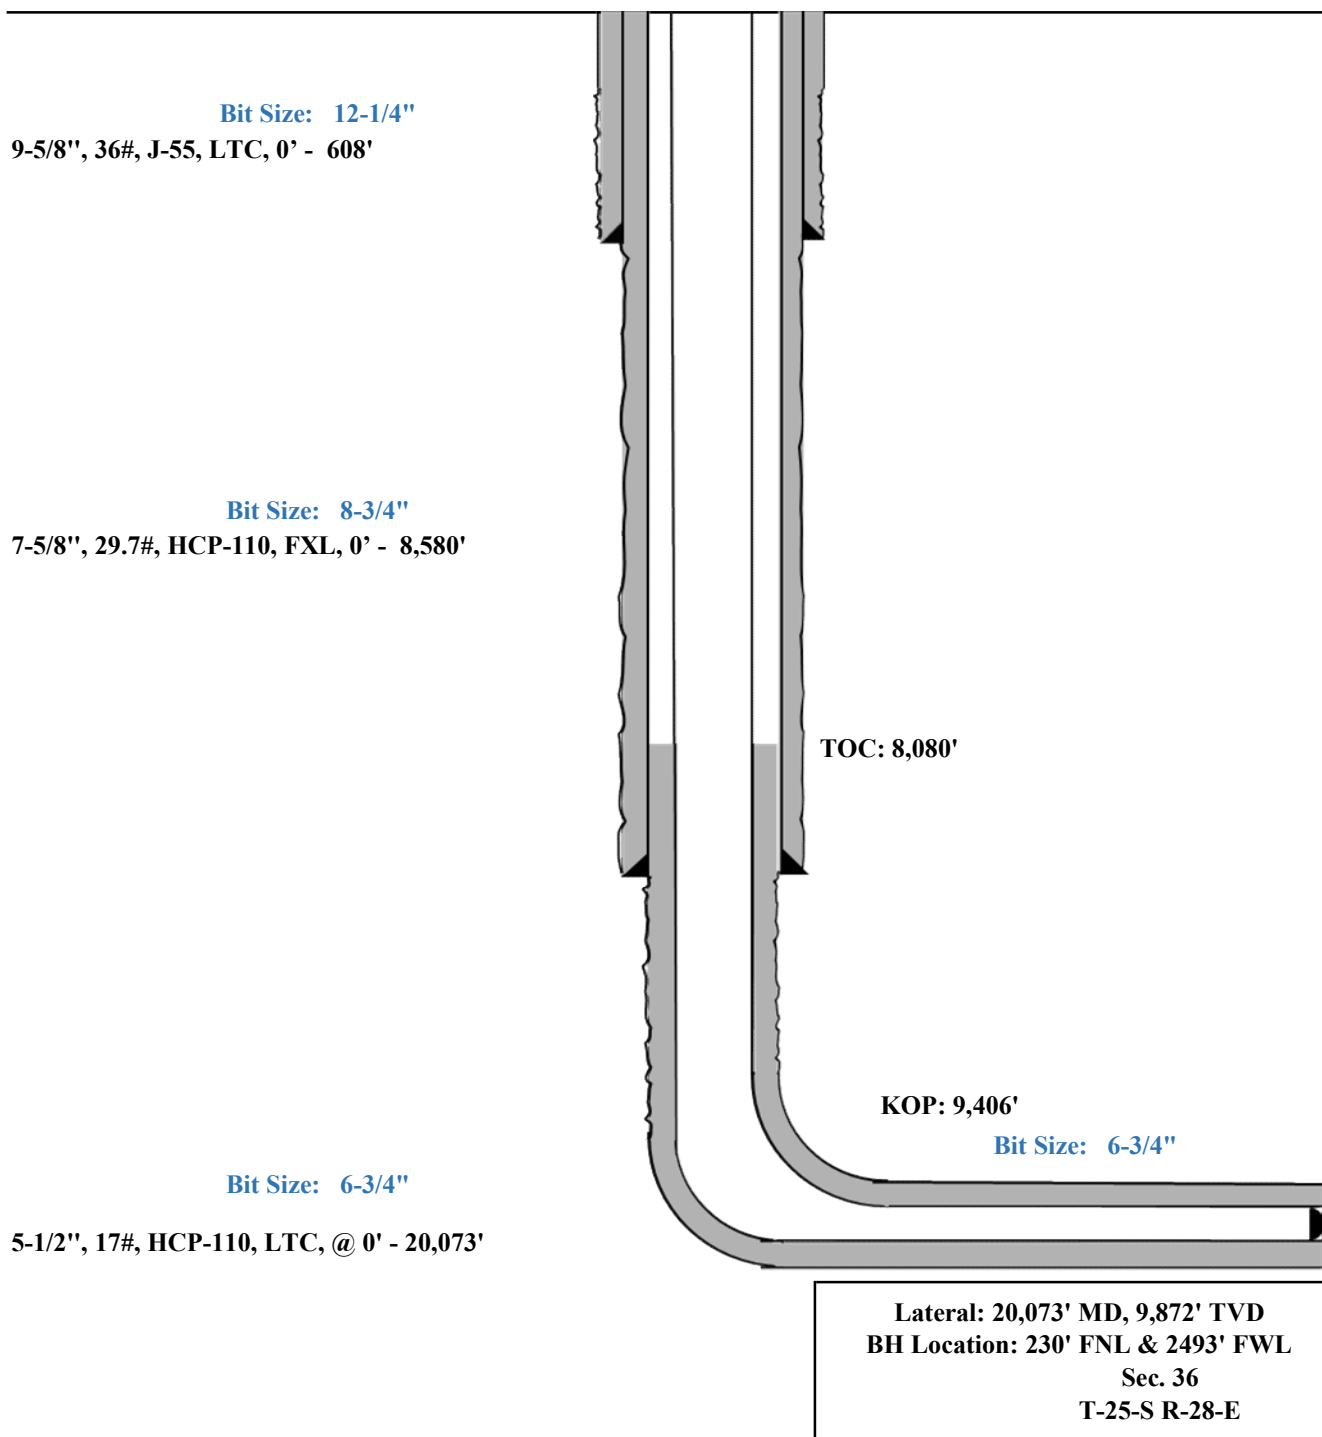



Golden Graham 1 State Com #725H

Eddy County, New Mexico

Proposed Wellbore

Design B

215' FSL

1829' FWL


Section 1

T-26-S, R-28-E

KB: 2958'

GL: 2933'

API: 30-015-48316

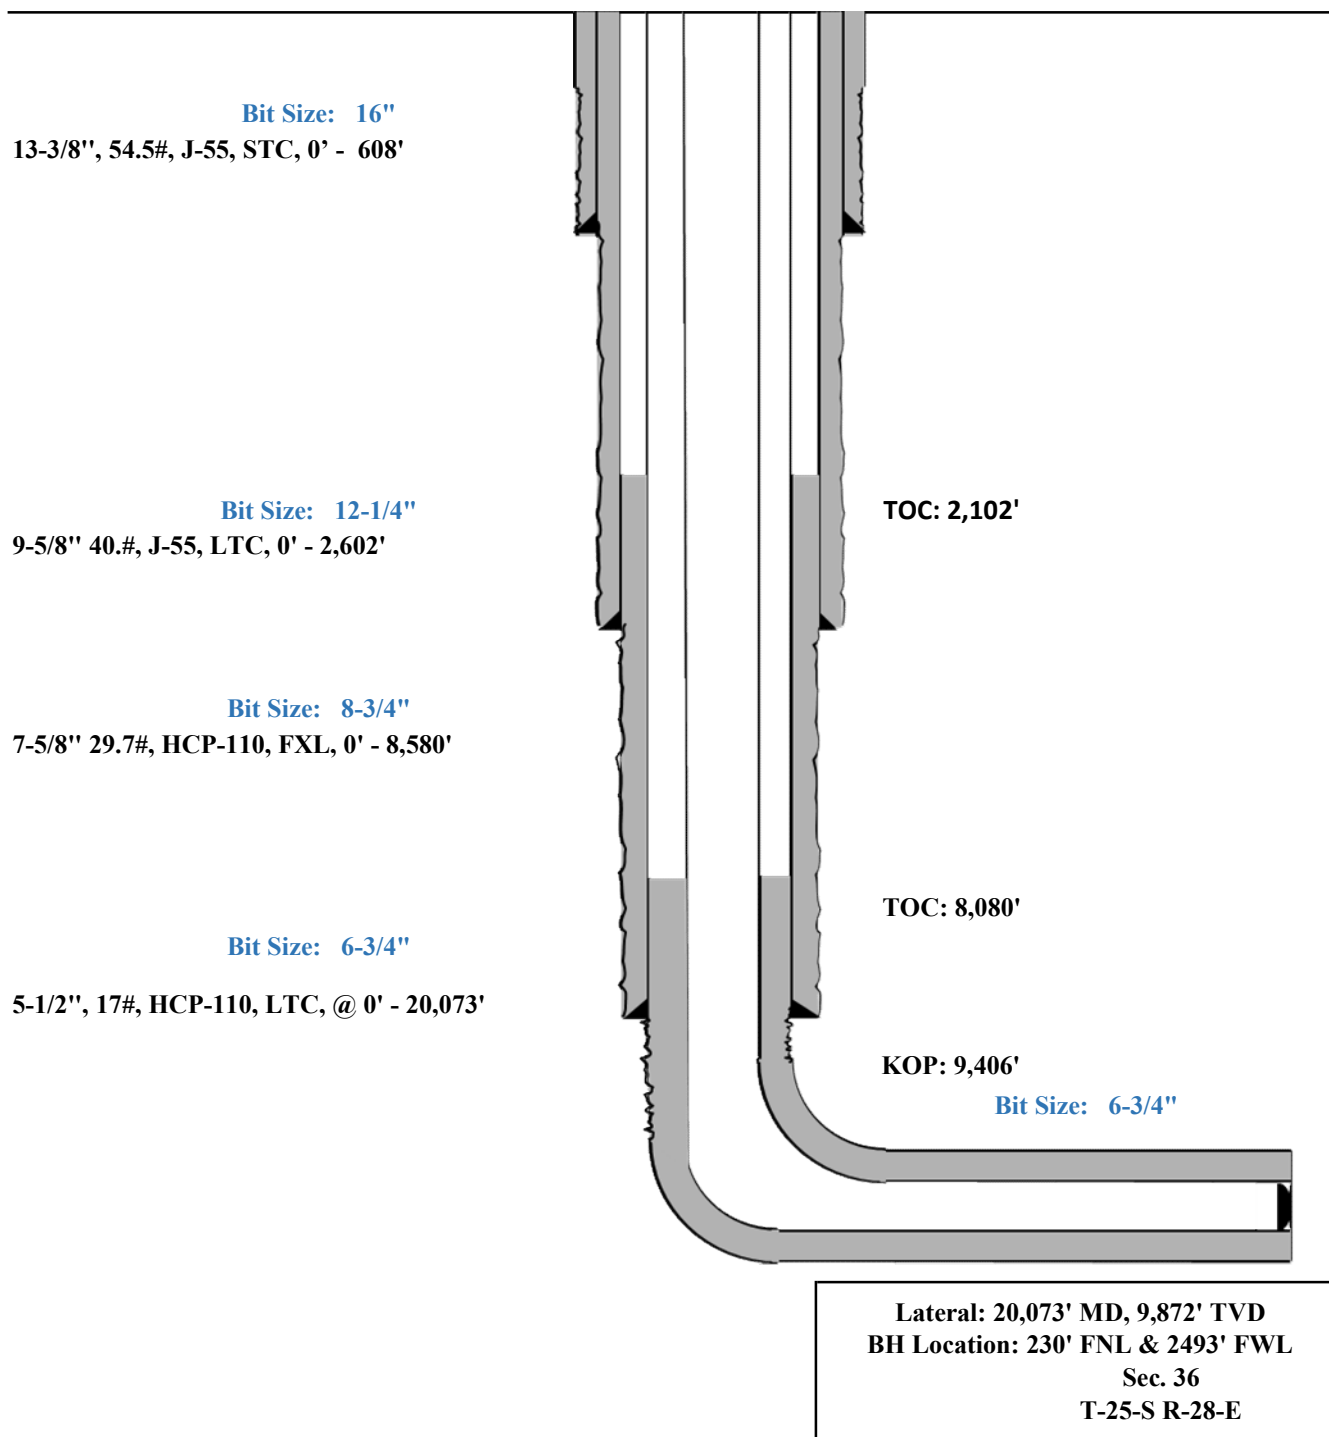



Golden Graham 1 State Com #725H

Permit Information:

Well Name: Golden Graham 1 State Com #725H

Location:

SHL: 215' FSL & 1829' FWL, Section 1, T-26-S, R-28-E, Eddy Co., N.M.

BHL: 230' FNL & 2493' FWL, Section 36, T-25-S, R-28-E, Eddy Co., N.M.

Design A

Casing Program:

Hole Size	Interval	Csg OD	Weight	Grade	Conn	DFmin Collapse	DFmin Burst	Dfmin Tension
12.25"	0' - 608'	9.625"	36#	J-55	LTC	1.125	1.25	1.6
8.75"	0' - 8,580'	7.625"	29.7#	HCP-110	FXL	1.125	1.25	1.6
6.75"	0' - 20,073'	5.5"	17#	HCP-110	LTC	1.125	1.25	1.6

Cement Program:

Depth	No. Sacks	Wt. ppg	Yld Ft3/sk	Slurry Description
608'	200	13.5	1.73	Class C + 4.0% Bentonite + 0.6% CD-32 + 0.5% CaCl ₂ + 0.25 lb/sk Cello-Flake (TOC @ Surface)
	80	14.8	1.34	Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate
8,580'	470	14.2	1.11	1st Stage (Tail): Class C + 5% Salt (TOC @ 4,582')
	1000	14.8	1.5	2nd Stage (Bradenhead squeeze): Class C + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (TOC @ surface)
20,073'	1020	14.2	1.31	Class H + 0.1% C-20 + 0.05% CSA-1000 + 0.20% C-49 + 0.40% C-17 (TOC @ 8,080')

Mud Program:

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 608'	Fresh - Gel	8.6-8.8	28-34	N/c
608' – 8,580'	Brine	10.0-10.2	28-34	N/c
8,580' – 9,406'	Oil Base	8.7-9.4	58-68	N/c - 6
9,406' – 20,073' Lateral	Oil Base	10.0-14.0	58-68	4 - 6



Golden Graham 1 State Com #725H

Design B**CASING PROGRAM**

Hole Size	Interval	Csg OD	Weight	Grade	Conn	DFmin Collapse	DFmin Burst	DFmin Tension
16"	0' - 608'	13.375"	54.5#	J-55	STC	1.125	1.25	1.6
12.25"	0' - 2,602'	9.625"	40#	J-55	LTC	1.125	1.25	1.6
8.75"	0' - 8,580'	7.625"	29.7#	HCP-110	FXL	1.125	1.25	1.6
6.75"	0' - 20,073'	5.5"	17#	HCP-110	FXL	1.125	1.25	1.6

Cementing Program:

Depth	No. Sacks	Wt. ppg	Yld Ft3/sk	Slurry Description
608'	180	13.5	1.73	Lead: Class C + 4.0% Bentonite Gel + 2.0% CaCl ₂ (TOC @ Surface)
	100	14.8	1.34	Tail: Class C + 0.6% FL-62 + 0.25 lb/sk Cello-Flake + 0.2% Sodium Metasilicate + 2.0% KCl (1.06 lb/sk)
2,602'	390	12.7	2.22	Lead: Class C + 0.15% C-20 + 11.63 pps Salt + 0.1% C-51 + 0.75% C-41P (TOC @ Surface)
	170	10.8	1.32	Tail: Class C + 0.13% C-20
8,580'	190	14.8	3.67	Lead: Class H + 0.40% D013 + 0.20% D046 + 0.10% D065 + 0.20% D167 (TOC @ 2,100')
	100	14.8	2.38	Tail: Class H + 94.0 pps D909 + 0.25% D065 + 0.30% D167 + 0.02% D208 + 0.15% D800 (TOC @ 7,075')
20,073'	1020	14.8	1.31	Class H + 0.1% C-20 + 0.05% CSA-1000 + 0.20% C-49 + 0.40% C-17 (TOC @ 8,075')

As a contingency, EOG requests to pump a two stage cement job on the 7-5/8" intermediate casing string with the first stage being pumped conventionally with the calculated top of cement at the Brushy Canyon (4,782') and the second stage performed as a bradenhead squeeze with planned cement from the Brushy Canyon to surface. If necessary, a top out consisting of 1,000 sacks of Class C cement + 3% Salt + 1% PreMag-M + 6% Bentonite Gel (1.5 yld, 14.8 ppg) will be executed.

Mud Program:

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0 – 608'	Fresh - Gel	8.6-8.8	28-34	N/c
608' – 2,602'	Brine	10.0-10.2	28-34	N/c
2,602' – 8,580'	Oil Base	8.7-9.4	58-68	N/c - 6
8,580' – 20,073' Lateral	Oil Base	10.0-14.0	58-68	4 - 6

**Golden Graham 1 State Com #725H****Hydrogen Sulfide Plan Summary**

A. All personnel shall receive proper H₂S training in accordance with Onshore Order III.C.3.a.

B. Briefing Area: two perpendicular areas will be designated by signs and readily accessible.

C. Required Emergency Equipment:

■ Well control equipment

- a. Flare line 150' from wellhead to be ignited by flare gun.
- b. Choke manifold with a remotely operated choke.
- c. Mud/gas separator

■ Protective equipment for essential personnel.

Breathing apparatus:

- a. Rescue Packs (SCBA) — 1 unit shall be placed at each breathing area, 2 shall be stored in the safety trailer.
- b. Work/Escapes packs — 4 packs shall be stored on the rig floor with sufficient air hose not to restrict work activity.
- c. Emergency Escape Packs — 4 packs shall be stored in the doghouse for emergency evacuation.

Auxiliary Rescue Equipment:

- a. Stretcher
- b. Two OSHA full body harness
- c. 100 ft 5/8 inch OSHA approved rope
- d. 1-20# class ABC fire extinguisher

■ H₂S detection and monitoring equipment:

The stationary detector with three sensors will be placed in the upper dog house if equipped, set to visually alarm @ 10 ppm and audible @ 14 ppm. Calibrate a minimum of every 30 days or as needed. The sensors will be placed in the following places: Rig floor / Bell nipple / End of flow line or where well bore fluid is being discharged.

(Gas sample tubes will be stored in the safety trailer)

■ Visual warning systems.

- a. One color code condition sign will be placed at the entrance to the site reflecting the possible conditions at the site.
- b. A colored condition flag will be on display, reflecting the current condition at the site at the time.
- c. Two wind socks will be placed in strategic locations, visible from all angles.



Golden Graham 1 State Com #725H

■ **Mud program:**

The mud program has been designed to minimize the volume of H₂S circulated to surface. The operator will have the necessary mud products to minimize hazards while drilling in H₂S bearing zones.

■ **Metallurgy:**

All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H₂S service.

■ **Communication:**

Communication will be via cell phones and land lines where available.



**Golden Graham 1 State Com #725H
Emergency Assistance Telephone List**

PUBLIC SAFETY: **911 or**

Lea County Sheriff's Department	(575) 396-3611
Rod Coffman	
Fire Department:	
Carlsbad	(575) 885-3125
Artesia	(575) 746-5050
Hospitals:	
Carlsbad	(575) 887-4121
Artesia	(575) 748-3333
Hobbs	(575) 392-1979
Dept. of Public Safety/Carlsbad	(575) 748-9718
Highway Department	(575) 885-3281
New Mexico Oil Conservation	(575) 476-3440
U.S. Dept. of Labor	(575) 887-1174

EOG Resources, Inc.

EOG / Midland	Office	(432) 686-3600
---------------	--------	----------------

Company Drilling Consultants:

David Dominique	Cell	(985) 518-5839
Mike Vann	Cell	(817) 980-5507

Drilling Engineer

Esteban Del Valle	Cell	(432) 269-7063
Daniel Moose	Cell	(432) 312-2803

Drilling Manager

Aj Dach	Office	(432) 686-3751
	Cell	(817) 480-1167

Drilling Superintendent

Jason Townsend	Office	(432) 848-9209
	Cell	(210) 776-5131

H&P Drilling

H&P Drilling	Office	(432) 563-5757
H&P 651 Drilling Rig	Rig	(903) 509-7131


Tool Pusher:

Johnathan Craig	Cell	(817) 760-6374
Brad Garrett		

Safety:

Brian Chandler (HSE Manager)	Office	(432) 686-3695
	Cell	(817) 239-0251

Eddy County, NM (NAD 83 NME)
Golden Graham 1 State Com #725H
Plan #0.3

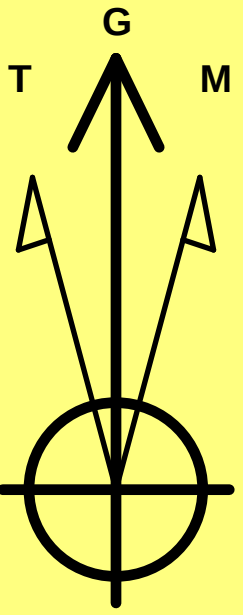

Azimuths to Grid North
True North: -0.15°
Magnetic North: 6.55°

Magnetic Field
Strength: 47311.2nT
Dip Angle: 59.67°
Date: 11/15/2021
Model: IGRF2020

To convert a Magnetic Direction to a Grid Direction, Add 6.55°
 To convert a Magnetic Direction to a True Direction, Add 6.70° East
 To convert a True Direction to a Grid Direction, Subtract 0.15°

PROJECT DETAILS: Eddy County, NM (NAD 83 NME)

Geodetic System: US State Plane 1983
 Datum: North American Datum 1983
 Ellipsoid: GRS 1980
 Zone: New Mexico Eastern Zone
 System Datum: Mean Sea Level

WELL DETAILS: #725H

Northing
 387485.00

KB = 26' @ 2960.0usft
 Easting
 631161.00

2934.0
 Latitude
 32.0649444°N



Longitude
 104.0433649°W

SECTION DETAILS										
Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	Dleg	TFace	VSect	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	1400.0	0.00	0.00	1400.0	0.0	0.0	0.00	0.00	0.0	
3	2090.1	13.80	104.18	2083.5	-20.3	80.2	2.00	104.18	-14.9	
4	4219.7	13.80	104.18	4151.5	-144.7	572.8	0.00	0.00	-106.3	
5	4909.8	0.00	0.00	4835.0	-165.0	653.0	2.00	180.00	-121.2	
6	9406.3	0.00	0.00	9331.5	-165.0	653.0	0.00	0.00	-121.2	KOP(GG 1 SC #725H)
7	10153.3	89.64	0.16	9809.0	309.4	654.3	12.00	0.16	352.3	
8	20073.1	89.64	0.16	9872.0	10229.0	682.0	0.00	0.00	10251.7	PBHL(GG 1 SC #725H)

CASING DETAILS

No casing data is available

WELLBORE TARGET DETAILS (MAP CO-ORDINATES)					
Name	TVD	+N/-S	+E/-W	Northing	Easting
KOP(GG 1 SC #725H)	9331.5	-165.0	653.0	387320.00	631814.00
PBHL(GG 1 SC #725H)	9872.0	10229.0	682.0	397714.00	631843.00
FTP(GG 1 SC #725H)	9809.0	112.0	653.0	387597.00	631814.00

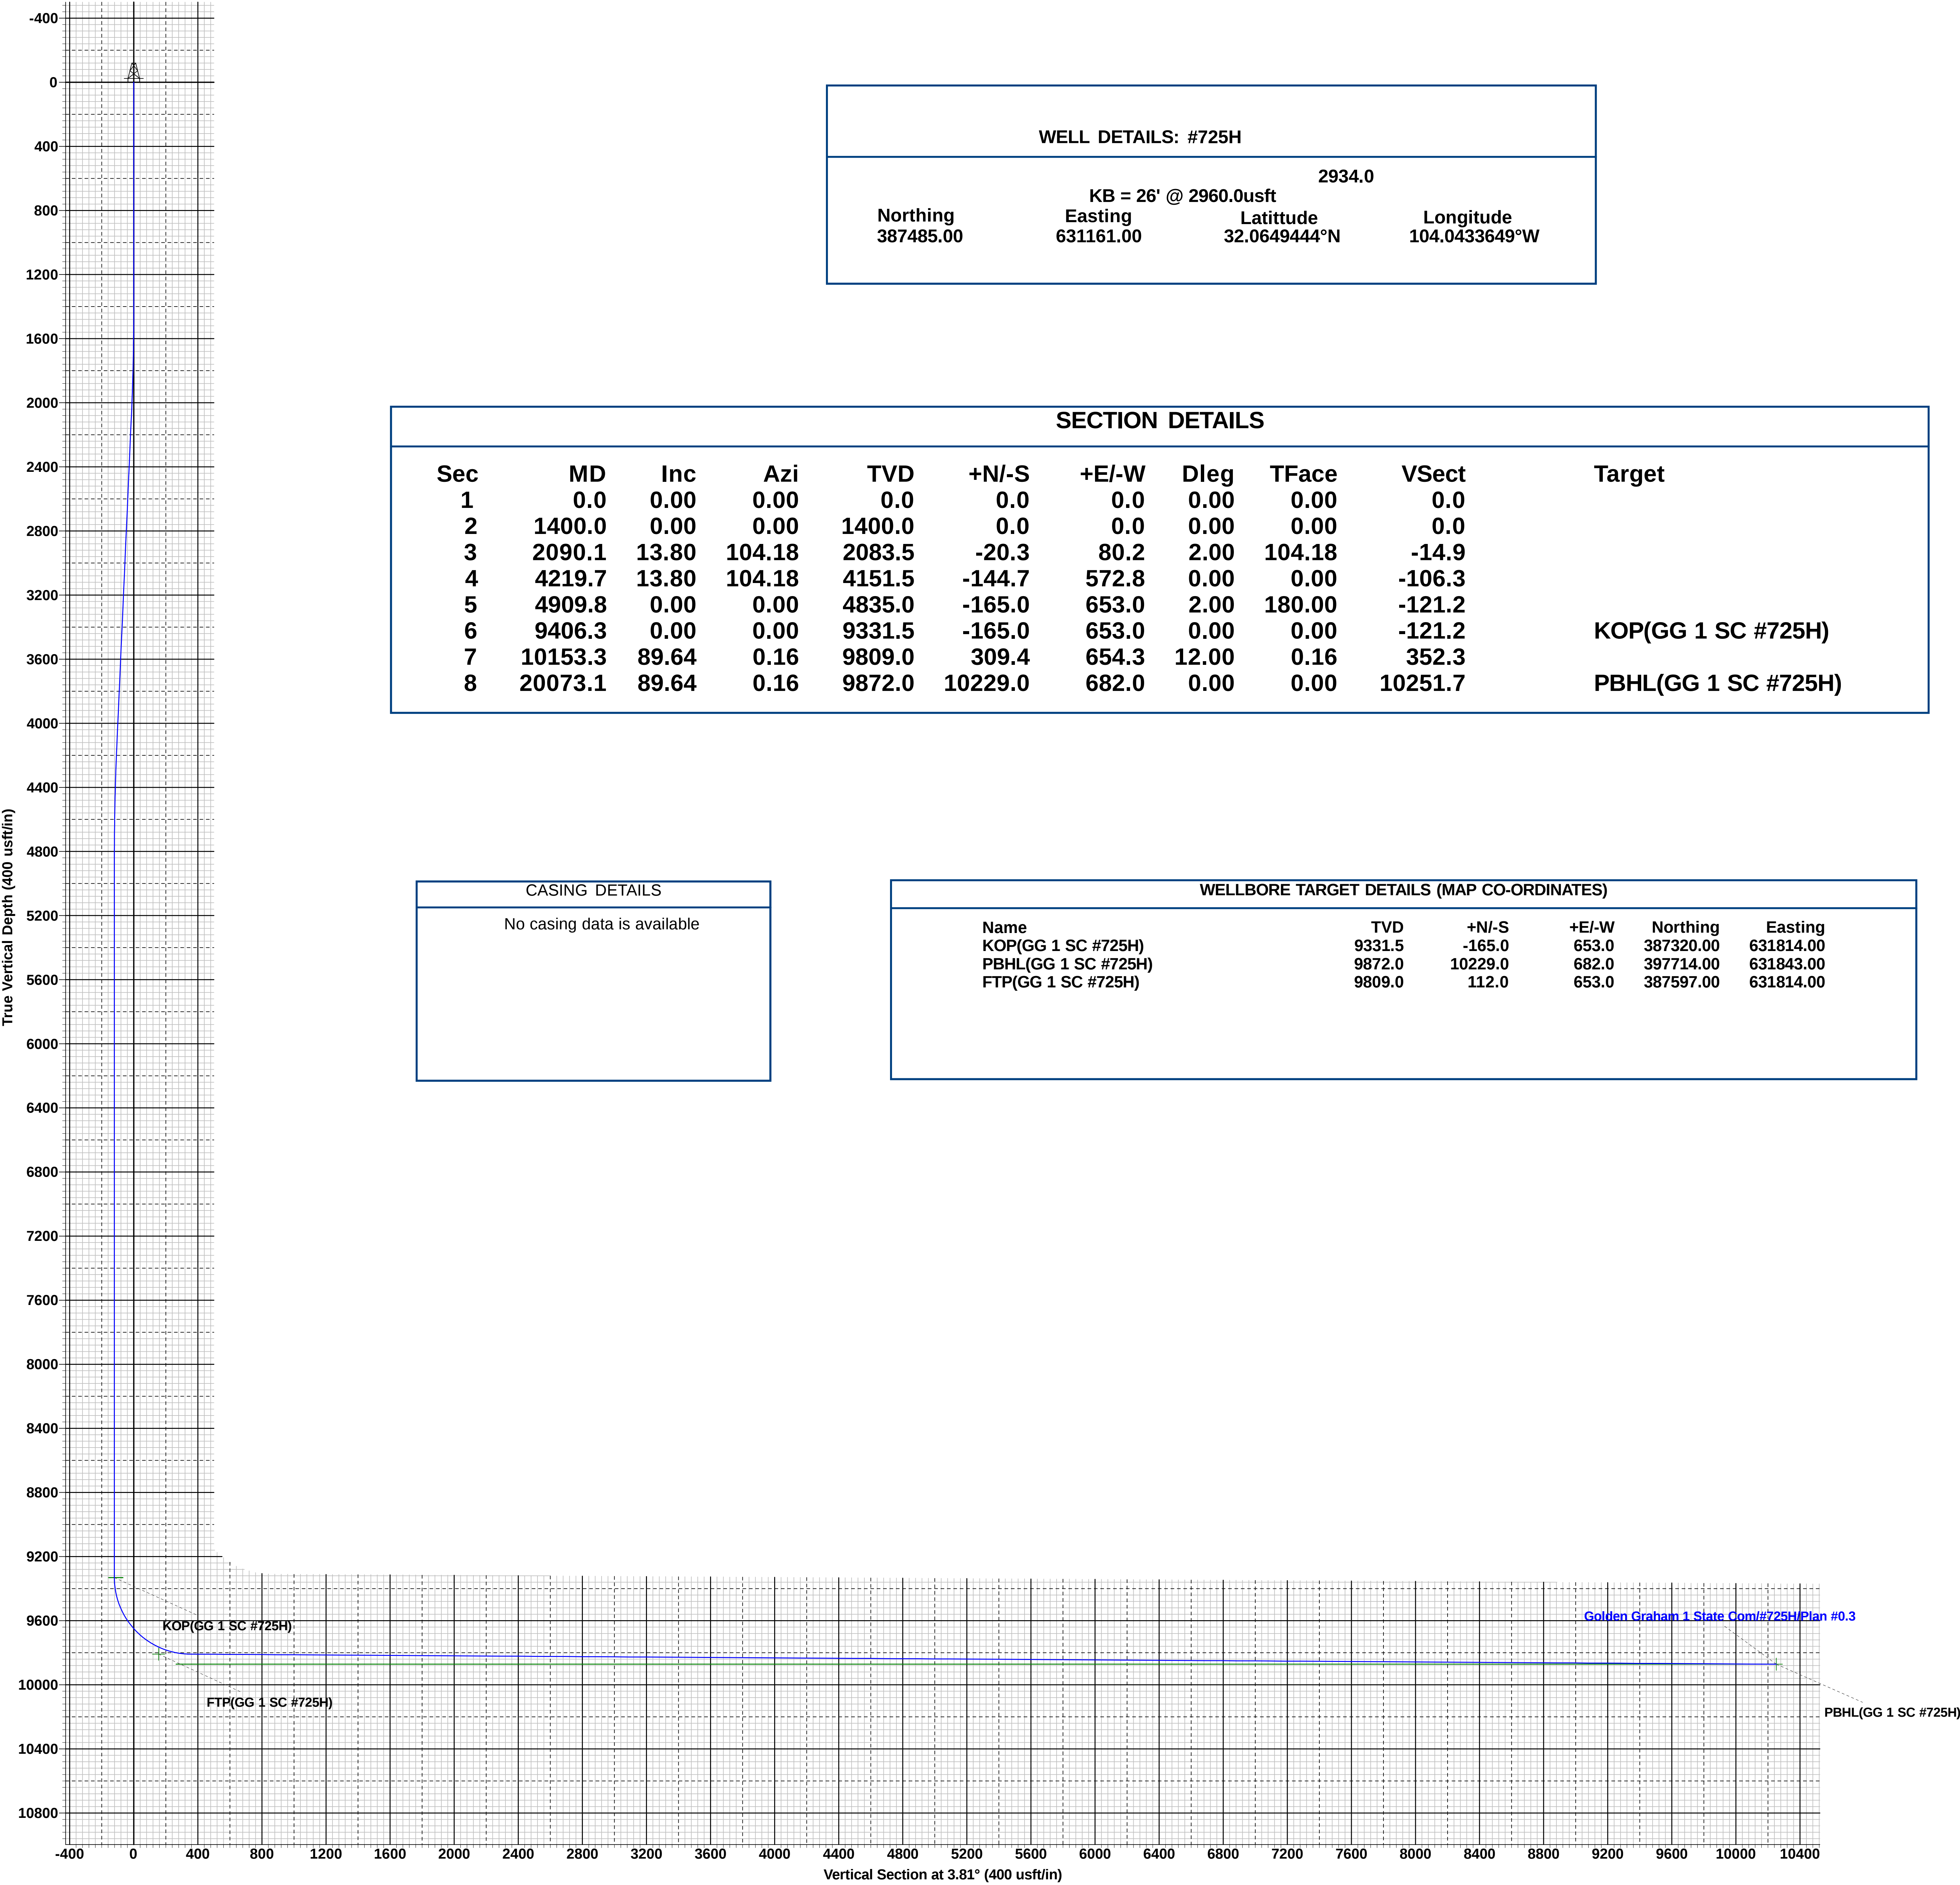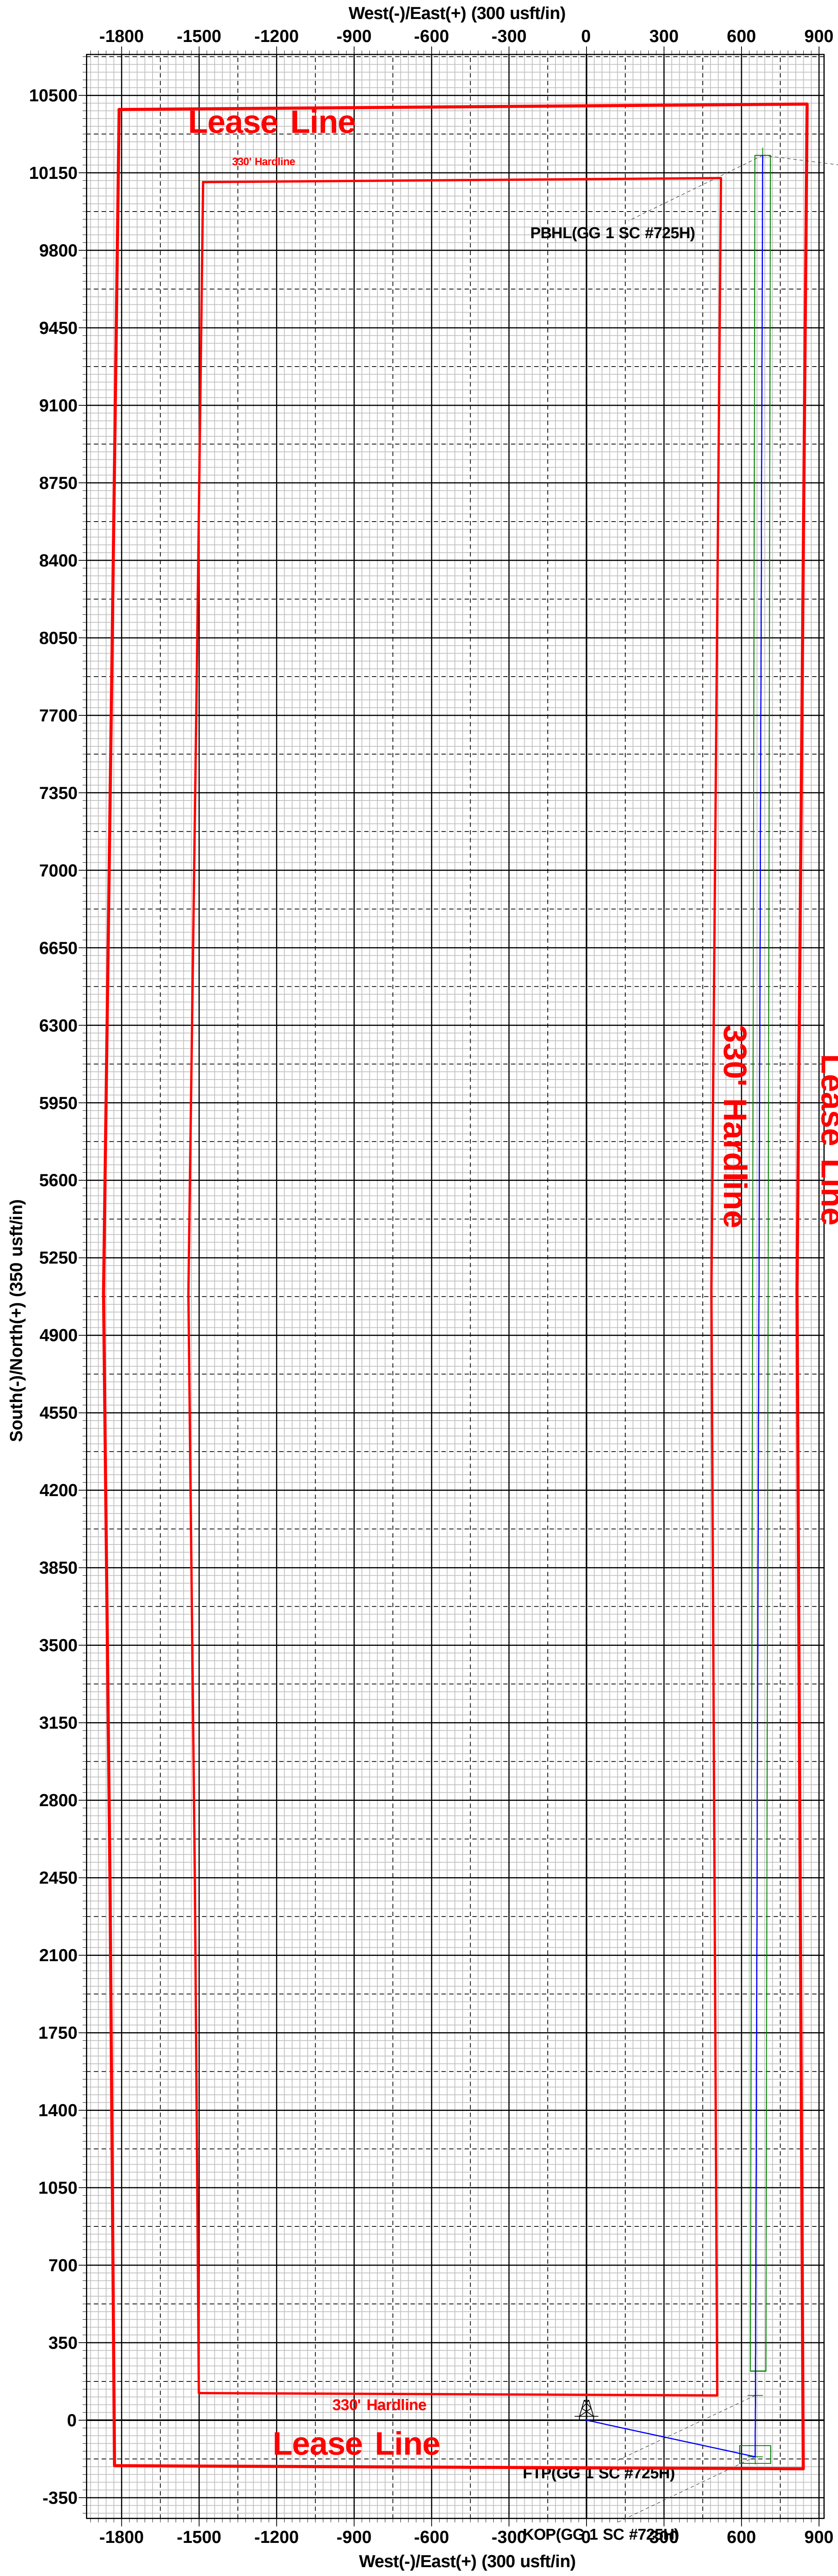

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 61093

CONDITIONS

Operator: EOG RESOURCES INC P.O. Box 2267 Midland, TX 79702	OGRID: 7377
	Action Number: 61093
	Action Type: [C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
kpickford	Adhere to previous NMOCD Conditions of Approval	11/18/2021