

Well Name: AXI APACHE F	Well Location: T23N / R5W / SEC 13 / NWNW /	County or Parish/State: RIO ARRIBA / NM
Well Number: 6	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name: JICARILLA APACHE
Lease Number: JIC78	Unit or CA Name:	Unit or CA Number:
US Well Number: 3003921041	Well Status: Producing Gas Well	Operator: DJR OPERATING LLC

Notice of Intent

Sundry ID: 2656672

Type of Submission: Notice of Intent	Type of Action: Plug and Abandonment
Date Sundry Submitted: 02/11/2022	Time Sundry Submitted: 07:55
Date proposed operation will begin: 02/11/2022	

Procedure Description: This NOI to P&A is being submitted for engineering & geological review per Dave M. of the BLM prior to onsite inspection. A Reclamation Plan will be submitted on a subsequent sundry at a later date. DJR Operating, LLC requests permission to Plug & Abandon the subject well according to the attached Procedure, Current & Proposed Wellbore Diagram.

Surface Disturbance

Is any additional surface disturbance proposed?: No

NOI Attachments

Procedure Description

- AXI_Apache_F_6_Proposed_WBD_20220211075511.pdf
- AXI_Apache_F_6_PA_Procedure_20220211075511.pdf
- AXI_Apache_F_6_BIA_Rationale_Form_20220211075511.pdf
- AXI_Apache_F_6_Current_WBD_20220211075511.pdf

Well Name: AXI APACHE F	Well Location: T23N / R5W / SEC 13 / NWNW /	County or Parish/State: RIO ARRIBA / NM
Well Number: 6	Type of Well: CONVENTIONAL GAS WELL	Allottee or Tribe Name: JICARILLA APACHE
Lease Number: JIC78	Unit or CA Name:	Unit or CA Number:
US Well Number: 3003921041	Well Status: Producing Gas Well	Operator: DJR OPERATING LLC

Conditions of Approval

Additional Reviews

General_Requirement_PxA_20220211122509.pdf
2656672_NOIA_F_6_3003921041_KR_02112022_20220211122455.pdf
23N05W13_AXI_Apache_F_6_KGR_20220211100212.pdf

Operator Certification

I certify that the foregoing is true and correct. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction. Electronic submission of Sundry Notices through this system satisfies regulations requiring a submission of Form 3160-5 or a Sundry Notice.

Operator Electronic Signature: SHAW-MARIE FORD	Signed on: FEB 11, 2022 07:55 AM
Name: DJR OPERATING LLC	
Title: Regulatory Specialist	
Street Address: 1 Road 3263	
City: Aztec	State: NM
Phone: (505) 632-3476	
Email address: sford@djrlc.com	

Field Representative

Representative Name:		
Street Address:		
City:	State:	Zip:
Phone:		
Email address:		

BLM Point of Contact

BLM POC Name: KENNETH G RENNICK	BLM POC Title: Petroleum Engineer
BLM POC Phone: 5055647742	BLM POC Email Address: krennick@blm.gov
Disposition: Approved	Disposition Date: 02/11/2022
Signature: Kenneth Rennick	

Plug and Abandonment Procedure
for
DJR Operating, LLC
AXI Apache F 6
API # 30-039-21041
NW/NW, Unit D, Sec. 13, T23N, R5W
Rio Arriba County, NM

I.

1. Hold Pre job meeting, comply with all NMOCD, BLM and environmental regulations.
2. MIRU rig.
3. Check and record tubing, casing and bradenhead pressures.
4. Remove existing piping from casing valve, RU blow lines from casing valves and blow down casing pressure. Kill well as necessary. Ensure that well is dead or on a vacuum.
5. ND WH, NU BOP, function test BOP.

II.

6. PU gauge ring and RIH to 2220'. POOH.
7. PU and RIH with wireline set 2-7/8" CR and set at 2220'. POOH. PU 1-1/2" workstring, TIH, and sting into CR. Pressure test tubing to 1000 psi, sting out of CR and test casing to 600 psi.
8. Plug 1: Perfs: Squeeze below CR with 10sx. Sting out of CR, and pump water to ensure that tubing is clear. TOOH.
1. Run CBL log from CR to surface. Hold 600 psi on casing if possible. Electronic copy of CBL to be sent to Ken Rennick krennick@blm.gov, Monica Kueling monica.kueling@state.nm.us, Loren Diede ldiede@djrlc.com, and slindsay@djrlc.com. Plugs may be adjusted per log results.

2. Plug 2: Pictured Cliffs, Fruitland, Kirtland, and Ojo Alamo: Mix and pump cement inside 2-7/8" from top of CR to TOC as determined by CBL. TOOH.
3. RIH with wireline. Perforate 2-7/8" above TOC. Set CR 50' above perfs. POOH.
4. TIH with workstring and sting into CR. Squeeze below CR with sufficient cement to bring TOC to 1665' inside and outside 2-7/8". Spot cement to 1665' inside 2-7/8". TOOH.
5. Plug 2. Nacimiento: RIH with wireline and perforate holes at 351' POOH. PU and RIH with 2-7/8" CR and set at 301'. POOH.
6. TIH with workstring. Sting into CR and mix and pump sufficient cement through CR to bring TOC to 251' inside and outside. Spot 50' on top of CR. Pump water to ensure tubing is clear. TOOH. If circulation is established through bradenhead, combining Plugs 2 and 3 (after consultation with BLM/NMOCD) may be considered.
7. Plug 3. Surface casing shoe, surface plug: RIH with wireline and perforate holes at 265'. Tie on to 2-7/8" casing and mix and pump cement inside and outside from 265' to surface.
8. RD cementing equipment. Cut off wellhead, fill any exposed annulus with cement, as necessary. **Install surface P&A marker as per BIA requirements.** Record GPS coordinates for P&A marker and the Final P&A Report. Photograph the P&A marker and attach to the report.
9. RD and MO all rig and cement equipment. Assure that location is free of trash and contamination before moving off.
10. Send all reports and attachments to DJR Aztec office for regulatory filings.

Note: All cement is to be Class G mixed at 15.8 ppg, yield 1.15 cu ft / sx. Cement volumes are based on inside capacities + 50' excess and outside capacities + 100% excess.

Surface PxA marker it to be installed at surface, 12"x18", and exposed at the reclaimed GL surface.

Current Wellbore Diagram
DJR Operating, LLC
AXI Apache F 6
API # 30-039-21041
NW/NW, Unit D, Sec 13, T23N, R5W
Rio Arriba County, NM

GL 6761'
 KB 6771'
 Spud Date 11/29/1974

SURF CSG

Hole size 12.25"
 Csg Size: 8.625"
 Wt: 20#
 Grade: ERW
 ID: 8.191"
 Depth 215'
 cap cf/ft: 0.3659
 TOC: Cement to Surf.

FORMATION TOPS

(Estimated)
 San Jose Surf
 Nacimiento 301'
 Ojo Alamo 1715'
 Kirtland 1888'
 Fruitland 2081'
 Pictured Cliffs 2232'

PROD TBG DETAIL:

None

PROD CSG

Hole size 6.75"
 Csg Size: 2.875"
 Wt: 6.5#
 Grade: J-55
 ID: 2.441"
 Depth 2388'
 cap cf/ft: 0.0325
 Csg/Csg Ann, 0.3208
 cf/ft:
 Csg/OH Ann, 0.2034
 cf/ft:
 TOC: 1989' (calc)

TOC: 1989' (Calc.)

Perfs 2236-88'

PBTD 2360'
 TD 2395'

Proposed **Wellbore Diagram**
DJR Operating, LLC
AXI Apache F 6
API # 30-039-21041
NW/NW, Unit D, Sec 13, T23N, R5W
Rio Arriba County, NM

GL 6761'
 KB 6771'
 Spud Date 11/29/1974

SURF CSG

Hole size 12.25"
 Csg Size: 8.625"
 Wt: 20#
 Grade: ERW
 ID: 8.191"
 Depth 215'
 cap cf/ft: 0.3659
 TOC: Cement to Surf.

FORMATION TOPS

(Estimated)
 San Jose
 Nacimiento
 Ojo Alamo
 Kirtland
 Fruitland
 Pictured Cliffs
 1715'
 1888'
 2081'
 2232'


PROD CSG

Hole size 6.75"
 Csg Size: 2.875"
 Wt: 6.5#
 Grade: J-55
 ID: 2.441"
 Depth 2388'
 cap cf/ft: 0.0325
 Csg/Csg Ann, cf/ft: 0.3208
 Csg/OH Ann, cf/ft: 0.2034
 TOC: 1989' (calc)

TOC: 1989' (Calc.)

CR at 2220'
 Perfs 2236-88'

PBTD 2360'
 TD 2395'

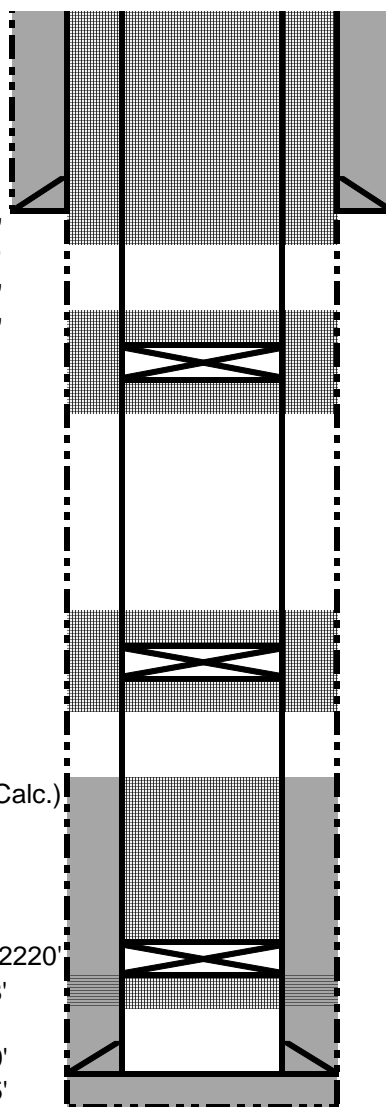

Plug 3: Surface shoe and surface plug: Perf holes at 265'. Tie onto 2-7/8" casing and mix and pump sufficient cement to bring TOC to surface, inside and outside.

Plug 3: Nacimiento top: Perf holes at 351'. Set CR at 301'. Sqz below CR with sufficient cement to bring TOC to 251', inside and outside. If good rate is established out bradenhead, combining Plugs 3 and 4 may be considered.

Plug 2: Pictured Cliffs, Fruitland, Kirtland, and Ojo Alamo tops: Plug will be adjusted pending results of CBL. Spot cement plug inside from CR to TOC. Perforate 2-7/8" above TOC. Set CR 50' above perfs. Mix and pump sufficient cement to bring TOC to 1665' inside and outside.

Plug 1: Perfs: Set CR at 2220'. Sqz below CR with 10 sx. Sting out of CR and TOO H to run CBL.

**GENERAL REQUIREMENTS FOR
PERMANENT ABANDONMENT OF WELLS ON FEDERAL AND INDIAN LEASES
FARMINGTON FIELD OFFICE**

1.0 The approved plugging plans may contain variances from the following minimum general requirements.

1.1 Modification of the approved plugging procedure is allowed only with the prior approval of the Authorized Officer, Farmington Field Office.

1.2 Requirements may be added to address specific well conditions.

2.0 Materials used must be accurately measured. (densometer/scales)

3.0 A tank or lined pit must be used for containment of any fluids from the wellbore during plugging operations and all pits are to be fenced with woven wire. These pits will be fenced on three sides and once the rig leaves location, the fourth side will be fenced.

3.1 Pits are not to be used for disposal of any hydrocarbons. If hydrocarbons are present in the pit, the fluids must be removed prior to filling in.

4.0 All cement plugs are to be placed through a work string. Cement may be bull-headed down the casing with prior approval. Cement caps on top of bridge plugs or cement retainers may be placed by dump bailer.

4.1 The cement shall be as specified in the approved plugging plan.

4.2 All cement plugs placed inside casing shall have sufficient volume to fill a minimum of 100' of the casing, or annular void(s) between casings, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.

4.3 Surface plugs may be no less than 50' in length.

4.4 All cement plugs placed to fill annular void(s) between casing and the formation shall be of sufficient volume to fill a minimum of 100' of the annular space plus 100% excess, calculated using the bit size, or 100' of annular capacity, determined from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug.

4.5 All cement plugs placed to fill an open hole shall be of sufficient volume to fill a minimum of 100' of hole, as calculated from a caliper log, plus an excess volume sufficient to provide for 50 linear feet of fill above the plug. In the absence of a caliper log, an excess of 100% shall be required.

4.6 A cement bond log or other accepted cement evaluation tool is required to be run if one had not been previously ran or cement did not circulate to surface during the original casing cementing job or subsequent cementing jobs.

5.0 All cement plugs spotted across, or above, any exposed zone(s), when; the wellbore is not full of fluid or the fluid level will not remain static, and in the case of lost circulation or partial returns during cement placement, shall be tested by tagging with the work string.

- 5.1 The top of any cement plug verified by tagging must be at or above the depth specified in the approved plan, without regard to any excess.
- 5.2 Testing will not be required for any cement plug that is mechanically contained by use of a bridge plug and/or cement retainer, if casing integrity has been established.
- 5.3 Any cement plug which is the only isolating medium, for a fresh water interval or a zone containing a prospectively valuable deposit of minerals, shall be tested by tagging.
- 5.4 If perforations are required below the surface casing shoe, a 30 minute minimum wait time will be required to determine if gas and/or water flows are present. If flow is present, the well will be shut-in for a minimum of one hour and the pressure recorded. Short or long term venting may be necessary to evacuate trapped gas. **If only a water flow occurs with no associated gas, shut well in and record the pressures. Contact the Engineer as it may be necessary to change the cement weight and additives.**

6.0 Before setting any cement plugs the hole needs to be rolled. All wells are to be controlled by means of a fluid that is to be of a weight and consistency necessary to stabilize the wellbore. This fluid shall be left in place as filler between all plugs.

- 6.1 Drilling mud may be used as the wellbore fluid in open hole plugging operations.
- 6.2 The wellbore fluid used in cased holes shall be of sufficient weight to balance known pore pressures in all exposed formations.

7.0 A blowout preventer and related equipment (BOPE) shall be installed and tested prior to working in a wellbore with any exposed zone(s); (1) that are over pressured, (2) where the pressures are unknown, or (3) known to contain H₂S.

8.0 Within 30 days after plugging work is completed, file a Sundry Notice, Subsequent Report of Abandonment (Form 3160-5), five copies, with the Field Manager, Bureau of Land Management, 6251 College Blvd., Suite A, Farmington, NM 87402. The report should show the manner in which the plugging work was carried out, the extent, by depth(s), of cement plugs placed, and the size and location, by depth(s), of casing left in the well. Show date well was plugged.

9.0 All permanently abandoned wells are to be marked with a permanent monument as specified in 43 CFR 3162.6(d). Unless otherwise approved.

10.0 If this well is located in a Specially Designated Area (SDA), compliance with the appropriate seasonal closure requirements will be necessary.

All of the above are minimum requirements. Failure to comply with the above conditions of approval may result in an assessment for noncompliance and/or a Shut-in Order being issued pursuant to 43 CFR 3163.1. You are further advised that any instructions, orders or decisions issued by the Bureau of Land Management are subject to administrative review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4 and 43 CFR 4.700.

(October 2012 Revision)

**UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
FARMINGTON DISTRICT OFFICE
6251 COLLEGE BLVD.
FARMINGTON, NEW MEXICO 87402**

AFMSS 2 Sundry ID 2656672

Attachment to notice of Intention to Abandon

Well: Axi Apache F 6

CONDITIONS OF APPROVAL

1. Plugging operations authorized are subject to the attached "General Requirements for Permanent Abandonment of Wells on Federal and Indian Lease."
2. Farmington Office is to be notified at least 24 hours before the plugging operations commence at (505) 564-7750.

You are also required to place cement excesses per 4.2 and 4.4 of the attached General Requirements.

Office Hours: 7:45 a.m. to 4:30 p.m.

K. Rennick 2/11/2022

BLM FLUID MINERALS P&A Geologic Report

Date Completed: 02/11/2022

Well No. AXI Apache F #6 (API# 30-039-21041)		Location	1190	FNL	&	1190	FWL
Lease No. JIC78		Sec. 13	T23N			R05W	
Operator DJR Operating, LLC		County	Rio Arriba		State	New Mexico	
Total Depth 2395'	PBTD 2360'	Formation Pictured Cliffs (Producing)					
Elevation (GL) 6761'		Elevation (KB) 6771'					

Geologic Formations	Est. Top	Est. Bottom	Log Top	Log Bottom	Remarks
San Jose Fm	Surface	301			Surface/freshwater sands
Nacimiento Fm	301	1715			Possible freshwater sands
Ojo Alamo Ss	1715	1888			Aquifer (possible freshwater)
Kirtland Shale	1888	2081			
Fruitland Fm	2081	2232			Coal/Gas/Possible water
Pictured Cliffs Ss	2232	PBTD			Gas
Lewis Shale					
Chacra					Gas
Cliff House Ss					Water/Possible gas
Menefee Fm					Coal/Ss/Water/Possible O&G
Point Lookout Ss					Probable water/Possible O&G
Mancos Shale					
Gallup					O&G/Water
Greenhorn					
Graneros Shale					
Dakota Ss					O&G/Water

Remarks:

P & A

Reference Well:

- The plugs proposed in the P&A procedure will adequately protect any freshwater sands in this well bore.
- Pictured Cliffs perms 2236' – 2288'.

Prepared by: Kenneth Rennick

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 81235

CONDITIONS

Operator: DJR OPERATING, LLC 1 Road 3263 Aztec, NM 87410	OGRID: 371838
	Action Number: 81235
	Action Type: [C-103] NOI Plug & Abandon (C-103F)

CONDITIONS

Created By	Condition	Condition Date
kpickford	CBL required	2/16/2022
kpickford	Adhere to BLM approved COAs and plugs. See GEO report.	2/16/2022
kpickford	Notify NMOCD 24 Hours Prior to beginning operations	2/16/2022