
Office District I - (575) 393-6161 1625 N. French Dr., Hobbs, NM 88240 District III - (575) 748-1283 811 S. First St., Artesia, NM 88210 District III - (505) 334-6178 1000 Rio Brazos Rd., Aztec, NM 87410 District IV - (505) 476-3460 1220 S. St. Francis Dr., Santa Fe, NM 87505 SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.) 1. Type of Well: Oil Well Gas Well Other 2. Name of Operator OXY USA INC. 3. Address of Operator P.O. BOX 4294, HOUSTON, TX 77210	WELL API NO. 30-015-42683 5. Indicate Type of Lease STATE FEE 6. State Oil & Gas Lease No. 7. Lease Name or Unit Agreement Name
4. Well Location	1 860 C. C. H. WEST
Unit Letter M: 900 feet from the SOUTH line Section 15 Township 24S Range	and 860 feet from the WEST line 29E NMPM County EDDY
11. Elevation (Show whether DR, RKB, RT,	TWIT WI County LDD I
2926' GL	
TEMPORARILY ABANDON CHANGE PLANS COMMEN	Attach wellbore diagram of ATELY DURING THE WEEK OF APRIL 25, 2022. DETAILS REGARDING COMMENCING INJECTION
Spud Date: Rig Release Date: I hereby certify that the information above is true and complete to the best of my known an	nowledge and belief.
SIGNATURE STEPHEN Januarek TITLE REGULATORY	ENGINEER
Type or print name STEPHEN JANACEK E-mail address: STEPHE For State Use Only	EN_JANACEK@OXY.COM PHONE: 713-493-1986
APPROVED BY: Dean R Mollure TITLE Petroleum Englischen Genditions of Approval (if any):	gineer04/29/2022

CURRENT WELLBORE DIAGRAM

*not to scale

CEDAR CANYON 16 STATE #012H 30-015-42683

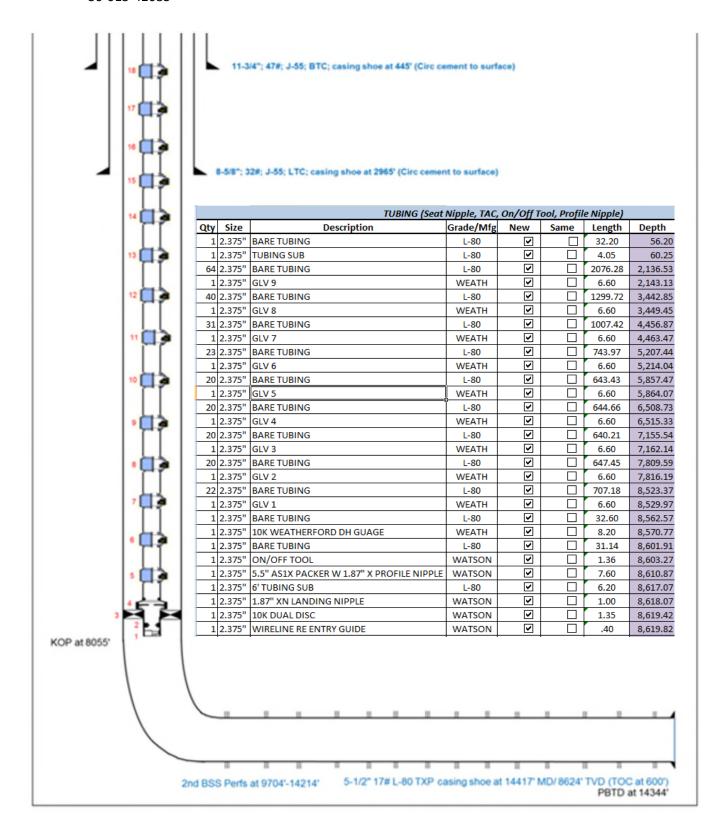

WELL: CEDAR CANYON 16 STATE #012H

API: 30-015-42683

INJECTION ORDER: R-21832

PURSUANT TO INJECTION ORDER R-21832:

- NO ADDITIONAL DOWNHOLE INJECTION EQUIPMENT NEEDS TO BE INSTALLED BEFORE BEGINNING OPERATIONS. THE EXISTING EQUIPMENT WILL BE UTILIZED.
- INJECTION WILL BE THROUGH TUBING INSTALLED WITH A PACKER SET AT 8610' MD.
- THE WELL IS EQUIPPED WITH A PRESSURE CONTROL DEVICE THAT WILL LIMIT THE MAXIMUM SURFACE INJECTION PRESSURE TO NO MORE THAN 1720 PSI FOR PRODUCED WATER, 4250 PSI FOR PRODUCED GAS, AND 2200 PSI FOR CARBON DIOXIDE.
- THE CASING-TUBING ANNULUS WILL BE FILLED WITH INERT FLUID, AND A GAUGE INSTALLED TO DETECT LEAKAGE.
- AN MIT WILL BE PERFORMED PRIOR TO COMMENCEMENT OF INJECTION. OXY WILL NOTIFY NMOCD OF MECHANICAL INTEGRITY TEST 72 HOURS IN ADVANCE.
- THE WELL IS TIED INTO A SCADA MONITORING SYSTEM.

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 92308

CONDITIONS

Operator:	OGRID:
OXY USA INC	16696
P.O. Box 4294	Action Number:
Houston, TX 772104294	92308
	Action Type:
	[C-103] NOI General Sundry (C-103X)

CONDITIONS

Created By	Condition	Condition Date
dmcclure	Dummy valves shall be installed in the side pocket mandrels during injection operations.	4/29/2022