Form C-101 August 1, 2011

Permit 316204

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240

Phone:(575) 393-6161 Fax:(575) 393-0720 <u>District II</u>

Bistrict II

1000 Rio Brazos Rd., Aztec, NM 87410

Phone:(505) 334-6178 Fax:(505) 334-6170 **District IV**

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A	ZONE
---	------

State of New Mexico

Energy, Minerals and Natural Resources

AT LIGHT ON ENTITY TO BRIEF, ILE ENTER, DEEL EN, 1 EGODAGI, GRADO A EGILE									
Operator Name and Address	2. OGRID Number								
TAP ROCK OPERATING, LLC	372043								
523 Park Point Drive	3. API Number								
Golden, CO 80401		30-025-50163							
4. Property Code	5. Property Name	6. Well No.							
330700	PROMETHEUS STATE COM	123H							

7. Surface Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
0	22	24S	33E	0	858	S	2435	E	Lea

8. Proposed Bottom Hole Location

UL - Lot	Section	Township	Range	Lot Idn	Feet From	N/S Line	Feet From	E/W Line	County
В	15	24S	33E	В	30	N	1650	E	Lea

9. Pool Information

TRIPLE X;BONE SPRING, WEST 96674

Additional Well Information

11. Work Type	12. Well Type	13. Cable/Rotary	14. Lease Type	15. Ground Level Elevation
New Well	OIL		State	3556
16. Multiple	17. Proposed Depth	18. Formation	19. Contractor	20. Spud Date
N	21445	2nd Bone Spring Sand		5/18/2022
Depth to Ground water		Distance from nearest fresh water well		Distance to nearest surface water

☑ We will be using a closed-loop system in lieu of lined pits

21. Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	54.5	1300	1140	0
Int1	12.25	9.625	40	5350	1045	0
Prod	7.875	5.5	20	21445	1670	10670
Prod	8.75	5.5	20	10670	435	5150

Casing/Cement Program: Additional Comments

22. Proposed Blowout Prevention Program

Туре	Working Pressure	Test Pressure	Manufacturer
Annular	5000	2500	
Double Ram	10000	5000	
Pipe	10000	5000	

knowledge and be	elief.	s true and complete to the best of my NMAC ⊠ and/or 19.15.14.9 (B) NMAC		OIL CONSERVATION	ON DIVISION	
Signature:						
Printed Name:	Electronically filed by Christian (Combs	Approved By:	Paul F Kautz		
Title:	Regulatory Manager		Title:	Geologist		
Email Address:	Email Address: ccombs@taprk.com			5/20/2022	Expiration Date: 5/20/2024	
Date:	5/12/2022	Phone: 720-360-4028	Conditions of Approval Attached			

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources
Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

FORM C-102 Revised August 1, 2011 Submit one copy to appropriate District Office

AMENDED REPORT


WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number		² Pool Code		
		96674	TRIPLE X;BONE SPRING, WEST	
⁴ Property Code		⁵ Pr	operty Name	⁶ Well Number
330700		PROMETHE	EUS STATE COM	123H
⁷ OGRID N₀.		⁸ O _l	perator Name	⁹ Elevation
#372043		TAP ROCK	3556'	


¹⁰Surface Location

- 1	UL or lot no.	Section	1 ownsnip	Kange	Lot Ian	reet from the	North/South line	reet from the	East/ west fille	County
	0	22	24-S	33-E	_	858'	SOUTH	2435'	EAST	LEA
				11]	Bottom Ho	le Location If I	Different From Su	rface		
ſ	UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
	В	15	24-S	33-E	_	30'	NORTH	1650'	EAST	LEA
ı	12Dedicated Acres	¹³ Joint or l	nfill 14Co	onsolidation Co	de ¹⁵ Ord	er No.				
	640									

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

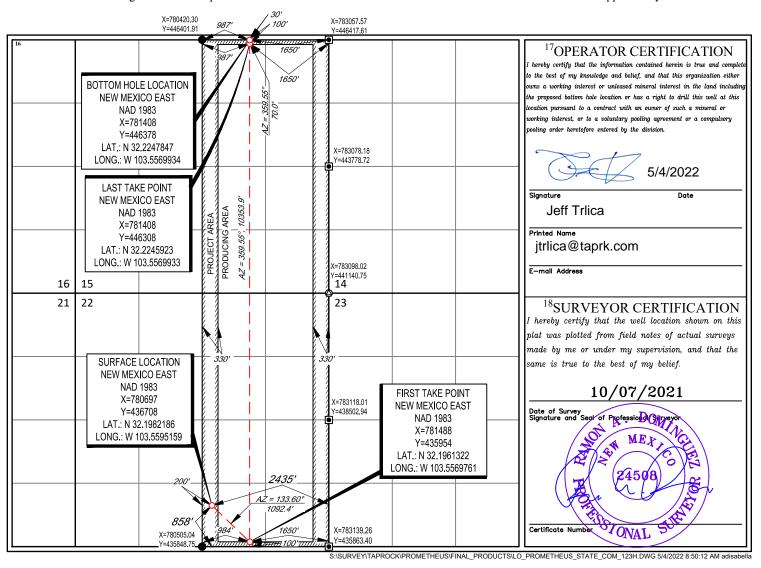

LOCATION & ELEVATION VERIFICATION MAP

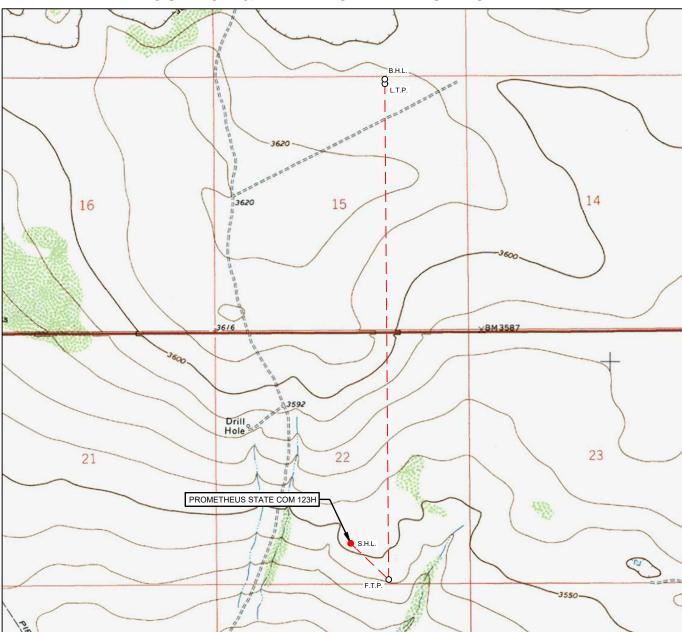



LEASE NAME & WELL NO.:

PROMETHEUS STATE COM 123H

 SECTION
 22
 TWP
 24-S
 RGE
 33-E
 SURVEY
 N.M.P.M.

 COUNTY
 LEA
 STATE
 NM
 ELEVATION
 3556'

 DESCRIPTION
 858' FSL & 2435' FEL

LATITUDE N 32.1982186 LONGITUDE W 103.5595159


SCALE: 1" = 2000'

THIS EASEMENT/SERVITUDE LOCATION SHOWN HEREON HAS BEEN SURVEYED ON THE GROUND UNDER MY SUPERVISION AND PREPARED ACCORDING TO THE EVIDENCE FOUND AT THE TIME OF SURVEY, AND DATA PROVIDED BY TAP ROCK OPERATING, LLC. THIS CERTIFICATION IS MADE AND LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS NON-TRANSFERABLE. THIS SURVEY IS CERTIFIED FOR THIS TRANSACTION ONLY.

ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREON ARE GRID BASED UPON THE NEW MEXICO COORDINATE SYSTEM OF 1983, EAST ZONE, U.S. SURVEY FEET.



TELEPHONE: (817) 744-7512 • FAX (817) 744-7554 2903 NORTH BIG SPRING • MIDLAND, TEXAS 79705 TELEPHONE: (432) 682-1653 OR (800) 767-1653 • FAX (432) 682-1743 WWW.TOPOGRAPHIC.COM DETAIL VIEW SCALE: 1" = 100'

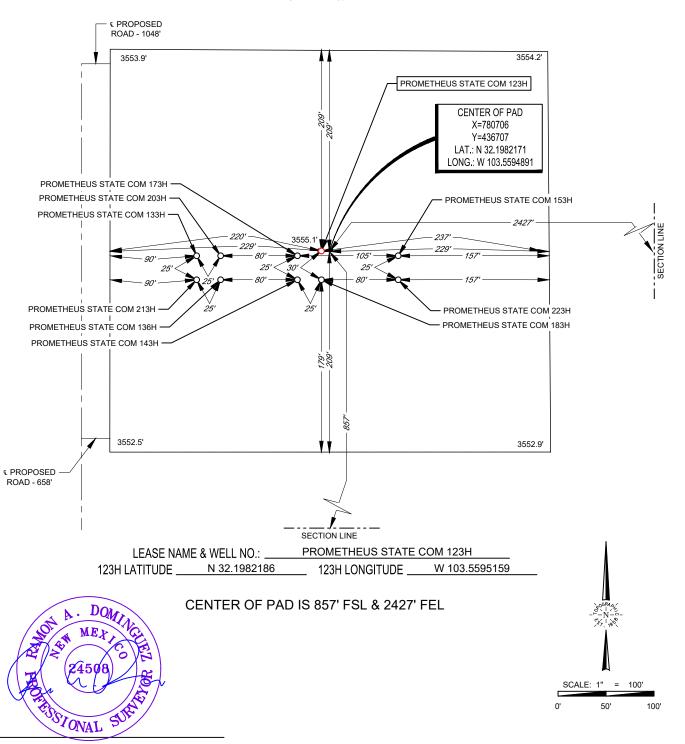

Ramon A. Dominguez, P.S. No. 24508

ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREON ARE GRID BASED UPON THE NEW MEXICO COORDINATE SYSTEM OF 1983, EAST ZONE, U.S. SURVEY FEET. ELEVATIONS USED ARE NAVD88, OBTAINED THROUGH AN OPUS SOLUTION.

THIS PROPOSED PAD SITE LOCATION SHOWN HEREON HAS BEEN SURVEYED ON THE GROUND UNDER MY SUPERVISION AND PREPARED ACCORDING TO THE EVIDENCE FOUND AT THE TIME OF SURVEY, AND DATA PROVIDED BY TAR POCK OPERATING, LLC. ONLY THE DATA SHOWN ABOVE IS BEING CERTIFIED TO, ALL OTHER INFORMATION WAS INTENTIONALLY OMITTED. THIS PLAT IS ONLY INTENDED TO BE USED FOR A PERMIT AND IS NOT A BOUNDARY SURVEY. THIS CERTIFICATION IS MADE AND LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS NON-TRANSFERABLE. THIS SURVEY IS CERTIFIED FOR THIS TRANSACTION ONLY.



1400 EVERMAN PARKWAY, Ste. 146 • FT. WORTH, TEXAS 76140

TELEPHONE: (817) 744-7512 • FAX (817) 744-7554

2903 NORTH BIG SPRING • MIDLAND, TEXAS 79705

TELEPHONE: (432) 682-1653 OR (800) 767-1653 • FAX (432) 682-1743

WWW.TOPOGRAPHIC.COM

Form APD Conditions

Permit 316204

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address:	API Number:
TAP ROCK OPERATING, LLC [372043]	30-025-50163
523 Park Point Drive	Well:
Golden, CO 80401	PROMETHEUS STATE COM #123H

OCD Reviewer	Condition
pkautz	Notify OCD 24 hours prior to casing & cement
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system
pkautz	Cement is required to circulate on both surface and intermediate1 strings of casing
pkautz	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud

State of New Mexico Energy, Minerals and Natural Resources Department

Submit Electronically Via E-permitting

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 Plan Description

			Effective May 25					
I. Operator:Ta	p Rock Ope	erating LLC	OGRID: _	372043		Date:	5/3/2022	
II. Type: ⊠ Original □] Amendme	ent due to □ 19.15.2	7.9.D(6)(a) NMA	AC □ 19.15.27.9	.D(6)(b) N	NMAC □	Other.	
If Other, please describe	:							
III. Well(s): Provide the be recompleted from a si					of wells pr	roposed to	be drilled	or proposed to
Well Name	A P I		F	ootages	Anticij Oil BE		Inticipated Gas MCF/D	Anticipated Produced Water
Prometheus State Com	123H	Sec 22, T24S R 3	3E 852 FSL,	1456 FEL	1500	2	250	3250
V. Anticipated Schedul proposed to be recomple Well Name	e: Provide 1	he following inform	ation for each ne	w or recompleted	d well or s t.	_		to be drilled or
			Date	Commenceme	ent Date	Back I	Date	Date
Prometheus State Com 123H		5/14/22	5/30/22	6/15/22		7/30/22	7/3	30/22
VI. Separation Equipm VII. Operational Pract Subsection A through F VIII. Best Managemen during active and planne	ices: ⊠ At of 19.15.27 t Practices	tach a complete des 8 NMAC. : ⊠ Attach a compl	cription of the ac	ctions Operator v	will take t	to comply	with the re	equirements of

Section 2 – Enhanced Plan EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

🗵 Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in
			Start Date	of System Segment Tie in

XI. Map. \square Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the
production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of
the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system \square will \square will not have capacity to gather 100% of the a	anticipated natural gas
production volume from the well prior to the date of first production.	

XIII. Line Pressure. Operator \square does \square does not anticipate that its existing well(s) connected to the same segment, or portion	n of the
natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new	well(s).

$\overline{}$	4 1 0		4 .					1 11	
	Attach On	erator′s r	olan to	manage n	roduction	in response	to the inc	reased line r	ressure

XIV. Confidentiality: Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in
Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information
for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications Effective May 25, 2021

	Effective (viry 25, 2021
Operator certifies that, a	after reasonable inquiry and based on the available information at the time of submittal:
one hundred percent of	to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering
hundred percent of the a into account the current	able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system. box, Operator will select one of the following:
Well Shut-In. □ Opera D of 19.15.27.9 NMAC	tor will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection; or
	lan. □ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential es for the natural gas until a natural gas gathering system is available, including:
(a)	power generation on lease;
(b)	power generation for grid;
(c)	compression on lease;
(d)	liquids removal on lease;
(e)	reinjection for underground storage;
(f)	reinjection for temporary storage;
(g)	reinjection for enhanced oil recovery;
(h)	fuel cell production; and
(i)	other alternative beneficial uses approved by the division.

Section 4 - Notices

- 1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:
- (a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or
- (b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.
- 2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature:
Printed Name: Jeff Trlica
Title: Regulatory Affairs
E-mail Address: jtrlica@taprk.com
Date: 5/4/2022
Phone: 720-771-5910
OIL CONSERVATION DIVISION
(Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

VI. **Separation Equipment:** Attach a complete description of how Operator will size separation equipment to optimize gas capture:

Each surface facility design includes the following process equipment: 3-phase separators (1 separator per well), a sales gas scrubber, one or two 3-phase heater treaters, a vapor recovery tower (VRT), a VRU compressor, multiple water and oil tanks, as well as flare knockouts (HP & LP), and flares (HP & LP). All process vessels will be sized to separate oil, water, gas based upon typical/historical & predicted well performance. Each process vessel will be fitted with an appropriately sized PSV as per ASME code requirements to mitigate vessel rupture and loss of containment. Additionally, the process vessels will be fitted with pressure transmitters tied to the facility control system which will allow operations to monitor pressures and when necessary, shut-in the facility to avoid vessel over-pressure and the potential vent of natural gas. Natural gas will preferentially be sold to pipeline, and only during upset/emergency conditions will gas be directed to the HP flare system. Flash gas from both the 3-phase heater treater and the VRT will be recompressed using a VRU compressor and this gas will also preferentially be directed to the gas sales pipeline. Oil tanks & water tanks will be fitted with 16 oz thief hatches as well as PVRVs to protect the tanks from rupture/collapse. Additionally, the tank vapor outlets and tank vapor capture system will be sized to keep tank pressures below 12 oz. The tank vapor capture system will include a tank vapor blower & knockout as well as a lowpressure flare and knockout. Tank vapors will preferentially be directed to the VRU and the sales gas pipeline. Only during process upsets/emergency conditions will tank vapors be directed to the LP flare system.

VII. **Operational Practices:** Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC. ← See attached reg for requirements.

- During drilling operations- Gas meters will be installed at the shakers and Volume
 Totalizers will be installed on the pits. In the event that elevated gas levels, or a pit
 gain are observed, returns will be diverted to a gas buster. Gas coming off the gas
 buster will be combusted at the flare stack. A 10' or taller flare will be located at
 least 100' from the SHL.
- During completions operations, including stimulation and frac plug drill out operations, hydrocarbon production to surface is minimized. When gas production does occur, gas will be combusted at a flare stack. A 10' or taller flare will be located at least 100' from the SHL.
- During production operations, all process vessels (separators, heater treaters, VRTs, Tanks) will recompress (where necessary) and route gas outlets into the natural gas gathering pipeline. Gas will preferentially be routed to natural gas gathering pipeline and the flare system will be used only during emergency, malfunction, or if the gas does not meet pipeline specifications. In the event of flaring off-specification gas, operations will pull gas samples twice a week and will also route gas back to pipeline as soon as the gas meets specification. Exceptions to this will include only those qualified exceptions per the regulation 19.15.27.8 Subsection D.

• To comply with state performance standards, separation and storage equipment will be designed to handle the maximum anticipated throughput and pressure to minimize waste and reduce the likelihood of venting gas to atmosphere. Additionally, each storage atmospheric tank (Oil & Water) will be fitted with a level transmitter to facilitate gauging of the tank without opening of the thief hatch. Any gas collected through the tank vent system is expected to be recompressed and routed to sales. However, in the event of an emergency, the tank vapor capture system will be designed to combust the gas using a flare stack fitted with a continuous or automatic ignitor. The flare stack will be properly anchored and will be located a minimum of 100 feet from the well and storage tanks. Operators will conduct weekly AVO inspections. These AVO inspection records will be stored for the required 5-year period and will be made available upon Division request.

VIII. **Best Management Practices:** Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

• When performing routine or preventive maintenance on a vessel or tank, initially all inlet valves are closed, and the vessel or tank is allowed to depressurize through the normal outlet connections to gas sales and/or liquid tanks. Once the vessel or tank is depressurized to lowest acceptable sales outlet pressure, usually around 20 psig, a temporary low-pressure flowline is connected from the vessel or tank to the Vapor Recovery Unit (VRU) for further pressure reduction. Once depressurized to less than 1-2 psig, the remaining natural gas in the vessel or tank is vented to atmosphere through a controlled pressure relief valve. Once the vessel or tank is depressurized to atmospheric pressure, the vessel or tank can be safely opened, and maintenance performed.



Tap Rock Resources, LLC

Lea County, NM (NAD 83 NME) (Promethus State) Sec-22_T-24-S_R-34-E Prometheus State Com #123H

OWB

Plan: Plan #2

Standard Planning Report

11 May, 2022





Site:

Design:

Site

Intrepid Planning Report



EDM 5000.15 Single User Db Database: Company: Tap Rock Resources, LLC Project: Lea County, NM (NAD 83 NME)

(Promethus State) Sec-22_T-24-S_R-34-E

Well: **OWB** Wellbore:

Prometheus State Com #123H

Plan #2

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Well Prometheus State Com #123H

359.56

KB @ 3582.0usft KB @ 3582.0usft

Grid

Minimum Curvature

Mean Sea Level

Project Lea County, NM (NAD 83 NME)

US State Plane 1983 Map System: North American Datum 1983 Geo Datum:

Map Zone: New Mexico Eastern Zone

(Promethus State) Sec-22_T-24-S_R-34-E

0.0

Site Position: Northing: 436,982.00 usft 32° 11' 56.488 N Latitude: From: Мар Easting: 778,079.00 usft Longitude: 103° 34' 4.705 W

System Datum:

Position Uncertainty: 0.41

0.0 usft **Slot Radius:** 13-3/16 " **Grid Convergence:**

Well Prometheus State Com #123H

Well Position +N/-S -274.0 usft Northing: 436,708.00 usft Latitude: 32° 11' 53.591 N

+E/-W 2,618.0 usft Easting: 780,697.00 usft Longitude: 103° 33' 34.261 W

Position Uncertainty 0.0 usft Wellhead Elevation: **Ground Level:** 3,556.0 usft

OWB Wellbore Sample Date Declination **Dip Angle** Field Strength Magnetics **Model Name** (°) (°) (nT) 47.420.35592274 IGRF2015 05/09/22 6.41 59.98

Design Plan #2 **Audit Notes:** Version: Tie On Depth: Phase: **PLAN** 0.0 **Vertical Section:** Depth From (TVD) +N/-S +E/-W Direction (usft) (usft) (usft) (°)

0.0

0.0

Plan Survey Tool Program Date 05/11/22 **Depth From** Depth To (usft) (usft) Survey (Wellbore) **Tool Name** Remarks Plan #2 (OWB) 0.0 5,300.0 GYD_GC+DROP+OH 1 Gyrodata Stationary Tool dro 2 5.300.0 21,444.7 Plan #2 (OWB) MWD+IFR1+MS OWSG MWD + IFR1 + Mult





Database: Company: Project:

Site:

EDM 5000.15 Single User Db Tap Rock Resources, LLC Lea County, NM (NAD 83 NME)

(Promethus State) Sec-22_T-24-S_R-34-E Prometheus State Com #123H

Well:

Wellbore: OWB
Design: Plan #2

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Well Prometheus State Com #123H

KB @ 3582.0usft KB @ 3582.0usft

Grid

Minimum Curvature

Plan Sections Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.00	0.00	0.00	0.00	
2,299.6	11.00	134.09	2,292.9	-73.2	75.6	1.00	1.00	0.00	134.09	
7,254.8	11.00	134.09	7,157.1	-730.8	754.4	0.00	0.00	0.00	0.00	
8,354.5	0.00	0.00	8,250.0	-804.0	830.0	1.00	-1.00	0.00	180.00	
10,671.5	0.00	0.00	10,567.0	-804.0	830.0	0.00	0.00	0.00	0.00	
11,493.3	90.40	356.00	11,087.9	-280.8	793.4	11.00	11.00	0.00	356.00	
11,671.1	90.40	359.56	11,086.6	-103.1	786.5	2.00	0.00	2.00	89.95	
21,444.7	90.40	359.56	11,018.0	9,670.0	711.0	0.00	0.00	0.00	0.00	PBHL (Prometheus





EDM 5000.15 Single User Db Database: Company: Tap Rock Resources, LLC Project: Lea County, NM (NAD 83 NME) Site:

(Promethus State) Sec-22_T-24-S_R-34-E

Prometheus State Com #123H Well:

OWB Wellbore:

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Well Prometheus State Com #123H

KB @ 3582.0usft KB @ 3582.0usft

Design:	Plan #2								
Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0 1,100.0 1,200.0 NUDGE - B	0.00 0.00 0.00	0.00 0.00 0.00	1,000.0 1,100.0 1,200.0	0.0 0.0 0.0	0.0 0.0 0.0	0.0 0.0 0.0	0.00 0.00 0.00	0.00 0.00 0.00	0.00 0.00 0.00
1,300.0	1.00	134.09	1,300.0	-0.6	0.6	-0.6	1.00	1.00	0.00
1,400.0		134.09	1,400.0	-2.4	2.5	-2.4	1.00	1.00	0.00
1,500.0	3.00	134.09	1,499.9	-5.5	5.6	-5.5	1.00	1.00	0.00
1,600.0	4.00	134.09	1,599.7	-9.7	10.0	-9.8	1.00	1.00	0.00
1,700.0	5.00	134.09	1,699.4	-15.2	15.7	-15.3	1.00	1.00	0.00
1,800.0	6.00	134.09	1,798.9	-21.8	22.5	-22.0	1.00	1.00	0.00
1,900.0	7.00	134.09	1,898.3	-29.7	30.7	-29.9	1.00	1.00	0.00
2,000.0 2,100.0 2,200.0 2,299.6	8.00 9.00 10.00 11.00 5.2 at 2299.6 N	134.09 134.09 134.09 134.09	1,997.4 2,096.3 2,194.9 2,292.9	-38.8 -49.1 -60.6 -73.2	40.1 50.7 62.5 75.6	-39.1 -49.5 -61.0 -73.8	1.00 1.00 1.00 1.00	1.00 1.00 1.00 1.00	0.00 0.00 0.00 0.00
2,400.0	11.00	134.09	2,391.4	-86.5	89.3	-87.2	0.00	0.00	0.00
2,500.0	11.00	134.09	2,489.6	-99.8	103.0	-100.6	0.00	0.00	0.00
2,600.0	11.00	134.09	2,587.7	-113.1	116.7	-113.9	0.00	0.00	0.00
2,700.0	11.00	134.09	2,685.9	-126.3	130.4	-127.3	0.00	0.00	0.00
2,800.0	11.00	134.09	2,784.1	-139.6	144.1	-140.7	0.00	0.00	0.00
2,900.0	11.00	134.09	2,882.2	-152.9	157.8	-154.1	0.00	0.00	0.00
3,000.0	11.00	134.09	2,980.4	-166.1	171.5	-167.5	0.00	0.00	0.00
3,100.0	11.00	134.09	3,078.6	-179.4	185.2	-180.8	0.00	0.00	0.00
3,200.0	11.00	134.09	3,176.7	-192.7	198.9	-194.2	0.00	0.00	0.00
3,300.0	11.00	134.09	3,274.9	-206.0	212.6	-207.6	0.00	0.00	0.00
3,400.0	11.00	134.09	3,373.1	-219.2	226.3	-221.0	0.00	0.00	0.00
3,500.0 3,600.0 3,700.0 3,800.0 3,900.0	11.00 11.00 11.00 11.00 11.00	134.09 134.09 134.09 134.09	3,471.2 3,569.4 3,667.6 3,765.7 3,863.9	-232.5 -245.8 -259.0 -272.3 -285.6	240.0 253.7 267.4 281.1 294.8	-234.3 -247.7 -261.1 -274.5 -287.8	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00
4,000.0	11.00	134.09	3,962.0	-298.9	308.5	-301.2	0.00	0.00	0.00
4,100.0	11.00	134.09	4,060.2	-312.1	322.2	-314.6	0.00	0.00	0.00
4,200.0	11.00	134.09	4,158.4	-325.4	335.9	-328.0	0.00	0.00	0.00
4,300.0	11.00	134.09	4,256.5	-338.7	349.6	-341.3	0.00	0.00	0.00
4,400.0	11.00	134.09	4,354.7	-351.9	363.3	-354.7	0.00	0.00	0.00
4,500.0	11.00	134.09	4,452.9	-365.2	377.0	-368.1	0.00	0.00	0.00
4,600.0	11.00	134.09	4,551.0	-378.5	390.7	-381.5	0.00	0.00	0.00
4,700.0	11.00	134.09	4,649.2	-391.8	404.4	-394.8	0.00	0.00	0.00
4,800.0	11.00	134.09	4,747.4	-405.0	418.1	-408.2	0.00	0.00	0.00
4,900.0	11.00	134.09	4,845.5	-418.3	431.8	-421.6	0.00	0.00	0.00
5,000.0	11.00	134.09	4,943.7	-431.6	445.5	-435.0	0.00	0.00	0.00
5,100.0	11.00	134.09	5,041.8	-444.8	459.2	-448.3	0.00	0.00	0.00





EDM 5000.15 Single User Db Database: Company: Project: Site:

Tap Rock Resources, LLC Lea County, NM (NAD 83 NME)

(Promethus State) Sec-22_T-24-S_R-34-E Prometheus State Com #123H

Well: OWB Wellbore: Plan #2 Design:

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Well Prometheus State Com #123H

KB @ 3582.0usft KB @ 3582.0usft

Design:		Plan #2								
Planned	Survey									
	leasured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
	5,200.0 5,300.0	11.00 11.00	134.09 134.09	5,140.0 5,238.2	-458.1 -471.4	472.9 486.6	-461.7 -475.1	0.00 0.00	0.00 0.00	0.00 0.00
	5,400.0	11.00	134.09	5,336.3	-484.6	500.3	-488.5	0.00	0.00	0.00
	5,500.0	11.00	134.09	5,434.5	-497.9	514.0	-501.9	0.00	0.00	0.00
	5,600.0 5,700.0	11.00 11.00	134.09 134.09	5,532.7 5,630.8	-511.2 -524.5	527.7 541.4	-515.2 -528.6	0.00 0.00	0.00 0.00	0.00 0.00
	5,800.0	11.00	134.09	5,729.0	-537.7	555.1	-542.0	0.00	0.00	0.00
	5,900.0	11.00	134.09	5,827.2	-551.0	568.8	-555.4	0.00	0.00	0.00
	6,000.0	11.00	134.09	5,925.3	-564.3	582.5	-568.7	0.00	0.00	0.00
	6,100.0 6,200.0	11.00 11.00	134.09 134.09	6,023.5 6,121.7	-577.5 -590.8	596.2 609.9	-582.1 -595.5	0.00 0.00	0.00 0.00	0.00 0.00
	6,300.0	11.00	134.09	6,219.8	-590.6 -604.1	623.6	-608.9	0.00	0.00	0.00
	6,400.0	11.00	134.09	6,318.0	-617.4	637.3	-622.2	0.00	0.00	0.00
	6,500.0	11.00	134.09	6,416.1	-630.6	651.0	-635.6	0.00	0.00	0.00
	6,600.0	11.00	134.09	6,514.3	-643.9	664.7	-649.0	0.00	0.00	0.00
	6,700.0 6,800.0	11.00 11.00	134.09 134.09	6,612.5 6,710.6	-657.2 -670.4	678.4 692.1	-662.4 -675.7	0.00 0.00	0.00 0.00	0.00 0.00
	6,900.0	11.00	134.09	6,808.8	-683.7	705.8	-689.1	0.00	0.00	0.00
	7,000.0	11.00	134.09	6,907.0	-697.0	719.5	-702.5	0.00	0.00	0.00
	7,100.0	11.00	134.09	7,005.1	-710.3	733.2	-715.9	0.00	0.00	0.00
	7,200.0	11.00	134.09	7,103.3	-723.5	746.9	-729.2	0.00	0.00	0.00
	7,254.8 DROP1.0	11.00	134.09	7,157.1	-730.8	754.4	-736.6	0.00	0.00	0.00
	7,300.0	10.54	134.09	7,201.5	-736.7	760.5	-742.5	1.00	-1.00	0.00
	7,400.0	9.54	134.09	7,300.0	-748.8	773.0	-754.7	1.00	-1.00	0.00
	7,500.0	8.54	134.09	7,398.7	-759.8	784.3	-765.8	1.00	-1.00	0.00
	7,600.0	7.54	134.09	7,497.7	-769.5	794.4	-775.6	1.00	-1.00	0.00
	7,700.0 7,800.0	6.54 5.54	134.09 134.09	7,597.0 7,696.4	-778.0 -785.3	803.2 810.7	-784.2 -791.6	1.00	-1.00 -1.00	0.00
	<u>-</u>			•				1.00		0.00
	7,900.0 8,000.0	4.54 3.54	134.09 134.09	7,796.0 7,895.8	-791.5 -796.4	817.1 822.1	-797.7 -802.7	1.00 1.00	-1.00 -1.00	0.00 0.00
	8,100.0	2.54	134.09	7,995.6	-800.1	825.9	-806.4	1.00	-1.00	0.00
	8,200.0	1.54	134.09	8,095.6	-802.6	828.5	-808.9	1.00	-1.00	0.00
	8,300.0	0.54	134.09	8,195.5	-803.8	829.8	-810.2	1.00	-1.00	0.00
	8,354.5	0.00 7.0 at 8354.5 N	0.00	8,250.0	-804.0	830.0	-810.4	1.00	-1.00	0.00
	8,400.0	0.00	0.00	8,295.5	-804.0	830.0	-810.4	0.00	0.00	0.00
	8,500.0	0.00	0.00	8,395.5	-804.0	830.0	-810.4	0.00	0.00	0.00
	8,600.0	0.00	0.00	8,495.5	-804.0	830.0	-810.4	0.00	0.00	0.00
	8,700.0	0.00	0.00	8,595.5	-804.0	830.0	-810.4	0.00	0.00	0.00
	8,800.0	0.00	0.00	8,695.5	-804.0	830.0	-810.4	0.00	0.00	0.00
	8,900.0 9,000.0	0.00 0.00	0.00 0.00	8,795.5 8,895.5	-804.0 -804.0	830.0 830.0	-810.4 -810.4	0.00 0.00	0.00 0.00	0.00 0.00
	9,000.0	0.00	0.00	8,995.5	-804.0 -804.0	830.0	-810.4 -810.4	0.00	0.00	0.00
	9,200.0	0.00	0.00	9,095.5	-804.0	830.0	-810.4	0.00	0.00	0.00
	9,300.0	0.00	0.00	9,195.5	-804.0	830.0	-810.4	0.00	0.00	0.00
	9,400.0	0.00	0.00	9,295.5	-804.0	830.0	-810.4	0.00	0.00	0.00
	9,500.0 9,600.0	0.00 0.00	0.00 0.00	9,395.5 9,495.5	-804.0 -804.0	830.0 830.0	-810.4 -810.4	0.00 0.00	0.00 0.00	0.00 0.00
	9,700.0	0.00	0.00	9,495.5	-804.0	830.0	-810.4	0.00	0.00	0.00
	9,800.0	0.00	0.00	9,695.5	-804.0	830.0	-810.4	0.00	0.00	0.00
	9,900.0	0.00	0.00	9,795.5	-804.0	830.0	-810.4	0.00	0.00	0.00
	10,000.0 10,100.0	0.00 0.00	0.00 0.00	9,895.5 9,995.5	-804.0 -804.0	830.0 830.0	-810.4 -810.4	0.00 0.00	0.00 0.00	0.00 0.00
	10,100.0	0.00	0.00	ن.نىدە,ى	-004.0	030.0	-010.4	0.00	0.00	0.00





EDM 5000.15 Single User Db Database: Company: Tap Rock Resources, LLC Project: Site:

Lea County, NM (NAD 83 NME) (Promethus State) Sec-22_T-24-S_R-34-E

Prometheus State Com #123H Well:

OWB Wellbore: Plan #2 **Local Co-ordinate Reference:**

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Well Prometheus State Com #123H

KB @ 3582.0usft KB @ 3582.0usft

esign:		Plan #2								
lanned Sur	vey									
Meas Dep (us	ured	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
10,	,200.0	0.00	0.00	10,095.5	-804.0	830.0	-810.4	0.00	0.00	0.00
10, 10, 10, 10,	300.0 ,400.0 ,500.0 ,600.0 ,671.5	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00	10,195.5 10,295.5 10,395.5 10,495.5 10,567.0	-804.0 -804.0 -804.0 -804.0 -804.0	830.0 830.0 830.0 830.0 830.0	-810.4 -810.4 -810.4 -810.4	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00
			050.00	10 505 5	200.0	200.0	200.0	44.00	44.00	0.00
10, 10, 10,	,700.0 ,750.0 ,800.0 ,850.0 ,900.0	3.14 8.64 14.14 19.64 25.14	356.00 356.00 356.00 356.00 356.00	10,595.5 10,645.2 10,694.2 10,742.1 10,788.3	-803.2 -798.1 -788.3 -773.8 -754.8	829.9 829.6 828.9 827.9 826.6	-809.6 -804.5 -794.6 -780.1 -761.1	11.00 11.00 11.00 11.00 11.00	11.00 11.00 11.00 11.00 11.00	0.00 0.00 0.00 0.00 0.00
11, 11, 11,	,950.0 ,000.0 ,050.0 ,100.0 ,150.0	30.64 36.14 41.64 47.14 52.64	356.00 356.00 356.00 356.00 356.00	10,832.5 10,874.2 10,913.1 10,948.8 10,981.0	-731.5 -704.0 -672.7 -637.8 -599.7	824.9 823.0 820.8 818.4 815.7	-737.8 -710.3 -679.0 -644.1 -605.9	11.00 11.00 11.00 11.00 11.00	11.00 11.00 11.00 11.00 11.00	0.00 0.00 0.00 0.00 0.00
11, 11, 11,	,200.0 ,250.0 ,300.0 ,350.0 ,400.0	58.14 63.64 69.14 74.64 80.14	356.00 356.00 356.00 356.00	11,009.4 11,033.7 11,053.7 11,069.3 11,080.2	-558.7 -515.1 -469.4 -422.0 -373.4	812.8 809.8 806.6 803.3 799.9	-564.9 -521.3 -475.6 -428.2 -379.5	11.00 11.00 11.00 11.00 11.00	11.00 11.00 11.00 11.00 11.00	0.00 0.00 0.00 0.00 0.00
,	450.0 493.3	85.64 90.40	356.00 356.00	11,086.4 11,087.9	-323.9 -280.8	796.4 793.4	-330.0 -286.9	11.00 11.00	11.00 11.00	0.00 0.00
		DLS 2.00 TFO		,						
11, 11,	,500.0 ,600.0 ,671.1	90.40 90.40 90.40 6 hold at 1167	356.13 358.13 359.56	11,087.8 11,087.1 11,086.6	-274.1 -174.2 -103.1	793.0 788.0 786.5	-280.1 -180.2 -109.1	2.00 2.00 2.00	0.00 0.00 0.00	2.00 2.00 2.00
11, 11, 12,	,700.0 ,800.0 ,900.0 ,000.0 ,100.0	90.40 90.40 90.40 90.40 90.40	359.56 359.56 359.56 359.56 359.56	11,086.4 11,085.7 11,085.0 11,084.3 11,083.6	-74.2 25.8 125.8 225.8 325.8	786.3 785.5 784.8 784.0 783.2	-80.2 19.8 119.7 219.7 319.7	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00
12, 12, 12,	,200.0 ,300.0 ,400.0 ,500.0 ,600.0	90.40 90.40 90.40 90.40 90.40	359.56 359.56 359.56 359.56 359.56	11,082.9 11,082.2 11,081.5 11,080.8 11,080.1	425.8 525.8 625.8 725.7 825.7	782.4 781.7 780.9 780.1 779.3	419.7 519.7 619.7 719.7 819.7	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00
12, 12, 13,	,700.0 ,800.0 ,900.0 ,000.0 ,100.0	90.40 90.40 90.40 90.40 90.40	359.56 359.56 359.56 359.56 359.56	11,079.4 11,078.7 11,078.0 11,077.3 11,076.6	925.7 1,025.7 1,125.7 1,225.7 1,325.7	778.6 777.8 777.0 776.3 775.5	919.7 1,019.7 1,119.7 1,219.7 1,319.7	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00
13, 13, 13,	,200.0 ,300.0 ,400.0 ,500.0 ,600.0	90.40 90.40 90.40 90.40 90.40	359.56 359.56 359.56 359.56 359.56	11,075.9 11,075.2 11,074.5 11,073.8 11,073.1	1,425.7 1,525.7 1,625.7 1,725.7 1,825.7	774.7 773.9 773.2 772.4 771.6	1,419.7 1,519.7 1,619.7 1,719.7 1,819.7	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00
13, 13,	,700.0 ,800.0 ,900.0 ,000.0	90.40 90.40 90.40 90.40	359.56 359.56 359.56 359.56	11,072.4 11,071.7 11,071.0 11,070.3	1,925.7 2,025.7 2,125.7 2,225.7	770.8 770.1 769.3 768.5	1,919.7 2,019.7 2,119.7 2,219.7	0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00





Database: Company: Project:

Site:

Well:

EDM 5000.15 Single User Db Tap Rock Resources, LLC Lea County, NM (NAD 83 NME)

(Promethus State) Sec-22_T-24-S_R-34-E Prometheus State Com #123H

Wellbore: OWB
Design: Plan #2

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Well Prometheus State Com #123H

KB @ 3582.0usft KB @ 3582.0usft

KB @ 3582. Grid

Minimum Curvature

Design.	FIAII #Z								
Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
14,100.0	90.40	359.56	11,069.6	2,325.7	767.8	2,319.7	0.00	0.00	0.00
14,200.0	90.40	359.56	11,068.9	2,425.7	767.0	2,419.7	0.00	0.00	0.00
14,300.0	90.40	359.56	11,068.2	2,525.6	766.2	2,519.7	0.00	0.00	0.00
14,400.0	90.40	359.56	11,067.5	2,625.6	765.4	2,619.7	0.00	0.00	0.00
14,500.0	90.40	359.56	11,066.8	2,725.6	764.7	2,719.7	0.00	0.00	0.00
14,600.0	90.40	359.56	11,066.1	2,825.6	763.9	2,819.7	0.00	0.00	0.00
14,700.0	90.40	359.56	11,065.3	2,925.6	763.1	2,919.7	0.00	0.00	0.00
14,800.0	90.40	359.56	11,064.6	3,025.6	762.3	3,019.7	0.00	0.00	0.00
14,900.0	90.40	359.56	11,063.9	3,125.6	761.6	3,119.7	0.00	0.00	0.00
15,000.0	90.40	359.56	11,063.2	3,225.6	760.8	3,219.7	0.00	0.00	0.00
15,100.0	90.40	359.56	11,062.5	3,325.6	760.0	3,319.7	0.00	0.00	0.00
15,200.0	90.40	359.56	11,061.8	3,425.6	759.3	3,419.7	0.00	0.00	0.00
15,300.0	90.40	359.56	11,061.1	3,525.6	758.5	3,519.7	0.00	0.00	0.00
15,400.0	90.40	359.56	11,060.4	3,625.6	757.7	3,619.7	0.00	0.00	0.00
15,500.0	90.40	359.56	11,059.7	3,725.6	756.9	3,719.7	0.00	0.00	0.00
15,600.0	90.40	359.56	11,059.0	3,825.6	756.2	3,819.7	0.00	0.00	0.00
15,700.0	90.40	359.56	11,058.3	3,925.6	755.4	3,919.7	0.00	0.00	0.00
15,800.0	90.40	359.56	11,057.6	4,025.6	754.6	4,019.7	0.00	0.00	0.00
15,900.0	90.40	359.56	11,056.9	4,125.6	753.8	4,119.7	0.00	0.00	0.00
16,000.0	90.40	359.56	11,056.2	4,225.6	753.1	4,219.6	0.00	0.00	0.00
16,100.0	90.40	359.56	11,055.5	4,325.6	752.3	4,319.6	0.00	0.00	0.00
16,200.0	90.40	359.56	11,054.8	4,425.5	751.5	4,419.6	0.00	0.00	0.00
16,300.0	90.40	359.56	11,054.1	4,525.5	750.8	4,519.6	0.00	0.00	0.00
16,400.0	90.40	359.56	11,053.4	4,625.5	750.0	4,619.6	0.00	0.00	0.00
16,500.0	90.40	359.56	11,052.7	4,725.5	749.2	4,719.6	0.00	0.00	0.00
16,600.0	90.40	359.56	11,052.0	4,825.5	748.4	4,819.6	0.00	0.00	0.00
16,700.0	90.40	359.56	11,051.3	4,925.5	747.7	4,919.6	0.00	0.00	0.00
16,800.0	90.40	359.56	11,050.6	5,025.5	746.9	5,019.6	0.00	0.00	0.00
16,900.0	90.40	359.56	11,049.9	5,125.5	746.1	5,119.6	0.00	0.00	0.00
17,000.0	90.40	359.56	11,049.2	5,225.5	745.3	5,219.6	0.00	0.00	0.00
17,100.0	90.40	359.56	11,048.5	5,325.5	744.6	5,319.6	0.00	0.00	0.00
17,100.0 17,200.0 17,300.0 17,400.0 17,500.0 17,600.0	90.40 90.40 90.40 90.40 90.40	359.56 359.56 359.56 359.56 359.56	11,047.8 11,047.1 11,046.4 11,045.7 11,045.0	5,425.5 5,525.5 5,625.5 5,725.5 5,825.5	743.8 743.0 742.3 741.5 740.7	5,419.6 5,519.6 5,619.6 5,719.6 5,819.6	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00	0.00 0.00 0.00 0.00 0.00
17,700.0	90.40	359.56	11,044.3	5,925.5	739.9	5,919.6	0.00	0.00	0.00
17,800.0	90.40	359.56	11,043.6	6,025.5	739.2	6,019.6	0.00	0.00	0.00
17,900.0	90.40	359.56	11,042.9	6,125.5	738.4	6,119.6	0.00	0.00	0.00
18,000.0	90.40	359.56	11,042.2	6,225.4	737.6	6,219.6	0.00	0.00	0.00
18,100.0	90.40	359.56	11,041.5	6,325.4	736.8	6,319.6	0.00	0.00	0.00
18,200.0	90.40	359.56	11,040.8	6,425.4	736.1	6,419.6	0.00	0.00	0.00
18,300.0	90.40	359.56	11,040.1	6,525.4	735.3	6,519.6	0.00	0.00	0.00
18,400.0	90.40	359.56	11,039.4	6,625.4	734.5	6,619.6	0.00	0.00	0.00
18,500.0	90.40	359.56	11,038.7	6,725.4	733.8	6,719.6	0.00	0.00	0.00
18,600.0	90.40	359.56	11,038.0	6,825.4	733.0	6,819.6	0.00	0.00	0.00
18,700.0	90.40	359.56	11,037.3	6,925.4	732.2	6,919.6	0.00	0.00	0.00
18,800.0	90.40	359.56	11,036.6	7,025.4	731.4	7,019.6	0.00	0.00	0.00
18,900.0	90.40	359.56	11,035.9	7,125.4	730.7	7,119.6	0.00	0.00	0.00
19,000.0	90.40	359.56	11,035.2	7,225.4	729.9	7,219.6	0.00	0.00	0.00
19,100.0	90.40	359.56	11,034.5	7,325.4	729.1	7,319.6	0.00	0.00	0.00
19,200.0	90.40	359.56	11,033.8	7,425.4	728.3	7,419.6	0.00	0.00	0.00
19,300.0	90.40	359.56	11,033.1	7,525.4	727.6	7,519.6	0.00	0.00	0.00
19,400.0	90.40	359.56	11,032.4	7,625.4	726.8	7,619.6	0.00	0.00	0.00





Database: Company: Project:

Site:

EDM 5000.15 Single User Db Tap Rock Resources, LLC Lea County, NM (NAD 83 NME)

(Promethus State) Sec-22_T-24-S_R-34-E

Well: Prometheus State Com #123H

Wellbore: OWB
Design: Plan #2

Local Co-ordinate Reference:

TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

Well Prometheus State Com #123H

KB @ 3582.0usft KB @ 3582.0usft

Grid

Minimum Curvature

-									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
19,500.0	90.40	359.56	11,031.7	7,725.4	726.0	7,719.6	0.00	0.00	0.00
19,600.0	90.40	359.56	11,031.0	7,825.4	725.3	7,819.6	0.00	0.00	0.00
19,700.0	90.40	359.56	11,030.2	7,925.4	724.5	7,919.6	0.00	0.00	0.00
19,800.0	90.40	359.56	11,029.5	8,025.3	723.7	8,019.6	0.00	0.00	0.00
19,900.0	90.40	359.56	11,028.8	8,125.3	722.9	8,119.6	0.00	0.00	0.00
20,000.0	90.40	359.56	11,028.1	8,225.3	722.2	8,219.5	0.00	0.00	0.00
20,100.0	90.40	359.56	11,027.4	8,325.3	721.4	8,319.5	0.00	0.00	0.00
20,200.0	90.40	359.56	11,026.7	8,425.3	720.6	8,419.5	0.00	0.00	0.00
20,300.0	90.40	359.56	11,026.0	8,525.3	719.8	8,519.5	0.00	0.00	0.00
20,400.0	90.40	359.56	11,025.3	8,625.3	719.1	8,619.5	0.00	0.00	0.00
20,500.0	90.40	359.56	11,024.6	8,725.3	718.3	8,719.5	0.00	0.00	0.00
20,600.0	90.40	359.56	11,023.9	8,825.3	717.5	8,819.5	0.00	0.00	0.00
20,700.0	90.40	359.56	11,023.2	8,925.3	716.8	8,919.5	0.00	0.00	0.00
20,800.0	90.40	359.56	11,022.5	9,025.3	716.0	9,019.5	0.00	0.00	0.00
20,900.0	90.40	359.56	11,021.8	9,125.3	715.2	9,119.5	0.00	0.00	0.00
21,000.0	90.40	359.56	11,021.1	9,225.3	714.4	9,219.5	0.00	0.00	0.00
21,100.0	90.40	359.56	11,020.4	9,325.3	713.7	9,319.5	0.00	0.00	0.00
21,200.0	90.40	359.56	11,019.7	9,425.3	712.9	9,419.5	0.00	0.00	0.00
21,300.0	90.40	359.56	11,019.0	9,525.3	712.1	9,519.5	0.00	0.00	0.00
21,400.0	90.40	359.56	11,018.3	9,625.3	711.3	9,619.5	0.00	0.00	0.00
21,444.7	90.40	359.56	11,018.0	9,670.0	711.0	9,664.3	0.00	0.00	0.00

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
LTP (Prometheus Stat - plan misses targ - Point			11,018.0 374.7usft M	9,600.0 1D (11018.5 T	711.0 ГVD, 9600.0	446,308.00 N, 711.5 E)	781,408.00	32° 13′ 28.534 N	103° 33' 25.180 W
PBHL (Prometheus St - plan hits target of - Rectangle (sides	enter		11,018.0	9,670.0	711.0	446,378.00	781,408.00	32° 13' 29.227 N	103° 33' 25.174 W
FTP (Prometheus Stat - plan misses targ - Point			11,090.0 11103.8usf	-754.0 t MD (10951.	791.0 4 TVD, -635	435,954.00 5.0 N, 818.2 E)	781,488.00	32° 11' 46.074 N	103° 33' 25.119 W





Database: EDM 5000.15 Single User Db Company: Tap Rock Resources, LLC Project: Lea County, NM (NAD 83 NME) Site: (Promethus State) Sec-22_T-24-

(Promethus State) Sec-22_T-24-S_R-34-E Prometheus State Com #123H

Well: Promethor OWB

Design: Plan #2

Local Co-ordinate Reference: TVD Reference:

MD Reference: North Reference: Survey Calculation Method: Well Prometheus State Com #123H

KB @ 3582.0usft KB @ 3582.0usft

Doolgii.	1 Idi1 // Z					
Formations						
	Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
	1,222.0	1,222.0	Rustler Anhydrite			
	1,678.6	1,678.0	Top Salt			
	5,021.7	4,965.0	Base Salt			
	5,274.4	5,213.0	Delaware Mountain Gp			
	5,284.5	5,223.0	Lamar			
	5,302.9	5,241.0	Bell Canyon			
	5,324.3	5,262.0	Ramsey Sand			
	6,453.0	6,370.0	Cherry Canyon			
	7,747.3	7,644.0	Brushy Canyon			
	9,272.5	9,168.0	Bone Spring Lime			
	9,364.5	9,260.0	Upper Avalon			
	9,538.5	9,434.0	Middle Avalon			
	9,911.5	9,807.0	Lower Avalon			
	10,252.5	10,148.0	1st Bone Spring Sand			
	10,546.5		2nd Bone Spring Carb			
	11,011.0	10,883.0	2nd Bone Spring Sand			

Plan Annotations				
Measured Depth (usft)	Vertical Depth (usft)	Local Coord +N/-S (usft)	dinates +E/-W (usft)	Comment
1,200.0	1,200.0	0.0	0.0	NUDGE - Build 1.00
2,299.6	2,292.9	-73.2	75.6	HOLD - 4955.2 at 2299.6 MD
7,254.8	7,157.1	-730.8	754.4	DROP1.00
8,354.5	8,250.0	-804.0	830.0	HOLD - 2317.0 at 8354.5 MD
10,671.5	10,567.0	-804.0	830.0	KOP - Build 11.00
11,493.3	11,087.9	-280.8	793.4	EOC/TRN - DLS 2.00 TFO 89.95
11,671.1	11,086.6	-103.1	786.5	Start 9773.6 hold at 11671.1 MD
21,444.7	11,018.0	9,670.0	711.0	TD at 21444.7