

Submit a Copy To Appropriate District
Office
District I – (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II – (505) 748-1283
811 S. First St., Artesia, NM 88210
District III – (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV – (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-015-35052
1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other <input type="checkbox"/> INJECTION		5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
2. Name of Operator SPUR ENERGY PARTNERS LLC		6. State Oil & Gas Lease No.
3. Address of Operator 9655 KATY FREEWAY, SUITE 500, HOUSTON, TX 77024		7. Lease Name or Unit Agreement Name CONTINENTAL A STATE
4. Well Location Unit Letter D : 330 feet from the NORTH line and 583 feet from the WEST line Section 30 Township 17S Range 29E NMPM EDDY County		8. Well Number 12
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3660' GR		9. OGRID Number 328947
		10. Pool name or Wildcat EMPIRE; GLORIETA-YESO

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>
DOWNHOLE COMMINGLE <input type="checkbox"/>	P AND A <input checked="" type="checkbox"/>
CLOSED-LOOP SYSTEM <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>
OTHER: <input type="checkbox"/>	OTHER: <input type="checkbox"/>

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Please find P&A procedure and final WBD attached for your use.
Thank you.

Approved for plugging of well bore only. Liability under bond is retained pending Location cleanup & receipt of C-103Q (Subsequent Report of Well Plugging) which may be found at OCD Web Page, OCD Permitting @ www.emnrd.state.nm.us

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Sarah Chapman TITLE REGULATORY DIRECTOR DATE 06/13/2022

Type or print name SARAH CHAPMAN E-mail address: SCHAPMAN@SPURENERGY.COM PHONE: 832-930-8613

For State Use Only

APPROVED BY: [Signature] TITLE Staff Manager DATE 6/13/2022

Conditions of Approval (if any):

Start Date	End Date	Summary
5/27/2022	5/27/2022	Move in all equipment, PJSM, spot rig and rig up, ND wellhead, NU flange and BOP, RU floor, realease packers and POOH w/ 132 jts and two packers, RU WL, RIH and set CIBP @ 3761', POOH RD WL, secure well and SDFN
5/31/2022	5/31/2022	Drove to location, PJSM, RIH w/ 116 jts, tag CIBP, Circ hole w/ fresh water, POOH, RU WL, RIH w/ CBL and log to surface, RD WL, RIH open ended w/ 116 jts, RU pump and break circulation, mix and pump plug #1 25 sx of class C cement from 3761', displace w/ 20.3 bbl, pull 20 stands to derrick, secure the well and SDFN, will tag cement plug in the morning.
6/1/2022	6/1/2022	Drove to locaton, PJSM, RIH and tag plug #1 @ 3515', RU hose and circulate well w/ 10# brine, POOH LD 8 jts, Broke Circ, mix and pump plug #2 25 sx of class C cement from 3490', displace w/ 18.8 bbls, pull 20 stands to derrick, WOC, RIH and tag plug #2 @ 3270', POOH LD 36 jts, RU hose, break circ, mix and pump plug #3 25 sx of class C cement from 2334'-2082', displace w/ 12 bbl, LD 9 jts, Mix and pump plug #4 25 sx of class C cement from 2039'-1789', displace w/ 10.3 bbl, LD 12 jts, mix and pump plug #5 25 sx of class C cement from 1640'-1388', displace w/ 8.1 bbl, Pull all pipe to derrick, secure the well and SDFN.
6/2/2022	6/2/2022	Drive to location, PJSM, RIH and tag Plug #5 @1458', POOH LD 18 jts, RU hose, break circ, mix and pump plug #6 20 sx of class C cement from 1069'-867', displace w/ 4.6 bbl, POOH LD 6 jts, mix and pump plug #7 25 sx of class C cement from 855'-658', displace w/ 3.4 bbl, pull tubing to derrick and WOC, RIH and tag plug #7 @ 658', POOH, RU WL, RIH and perf @ 372', POOH RD WL, RIH w/ packer and set @ 60', check injection rate, pressure up to 500 psi, OCD ok'd to perf at 200' and check injection rate, RU WL, RIH and perf @ 200', POOH RD WL, RIH w/ packer and set @ 60', check injection rate, pressure up to 500 psi, notify OCD and David Alvarado Ok'd to drop to 422' and pump plug #8, mix and pump plug #8 45 sx of class C cement from 422' to surface, wash all equipment, secure well and SDFN.
6/3/2022	6/3/2022	Drove to location, PJSM, RD all equipment, move to next well

API #	30-015-35052	Continental A State #12	County, ST	Eddy County, NM
Operator	Spur Energy Partners		Sec-Twn-Rng	30-17S-29E
Field	Empire; Glorieta-Yeso		Footage	330 FNL 583 FWL
Spud Date	9/24/2006		Survey	32.8119621 -104.1195831

Formation (MD)	
Base Salt	739
Yates	800
7 Rivers	1001
Queen	1590
Grayburg	
San Andres	2281
Glorieta	3697

RKB	
GL	3660

Hole Size	17-1/2"
TOC	Surface
Method	Circ 100 sx

Csg Depth	322'
Size	13-3/8"
Weight	48
Grade	H40
Connections	STC
Cement	448 sx

Tubing Detail				
Jts	Size	Depth	Length	Detail

Rod Detail				
Rods	Size	Depth	Length	Detail

Hole Size	12-1/4"
TOC	Surface
Method	Circ 130 sx


Csg Depth	805'
Size	8-5/8"
Weight	24
Grade	J55
Connections	
Cement	600 sx

Last Update	2/16/2022
By	RCB

PBTD	5436'
TD MD	5460'
TD TVD	5460'

Hole Size	7-7/8"
TOC	Surface
Method	Circ 200 sx

Csg Depth	5454'
Size	5-1/2"
Weight	17
Grade	J55
Connections	STC
Cement	1580 sx

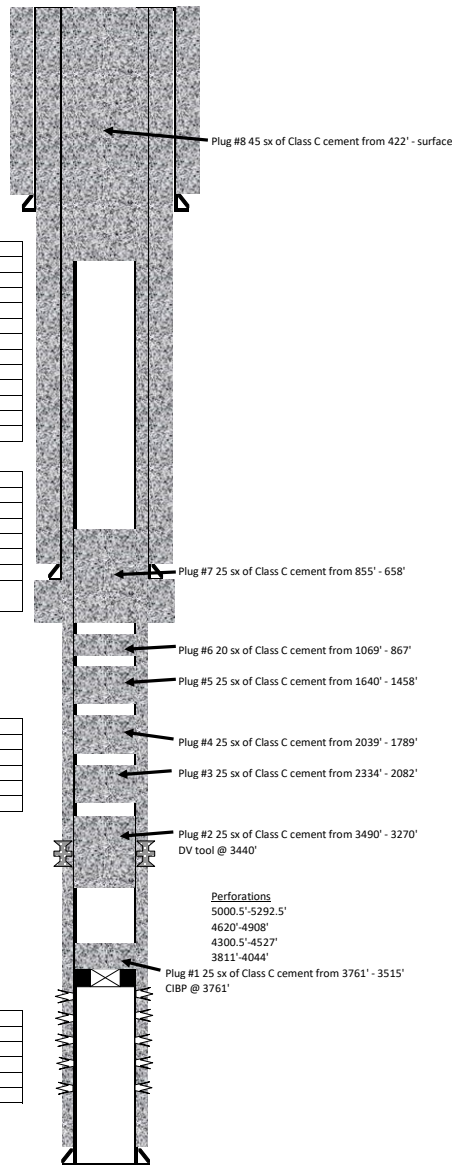

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 116061

CONDITIONS

Operator: Spur Energy Partners LLC 9655 Katy Freeway Houston, TX 77024	OGRID: 328947
	Action Number: 116061
	Action Type: [C-103] Sub. Plugging (C-103P)

CONDITIONS

Created By	Condition	Condition Date
gcordero	None	6/13/2022