eceived by Opp 2: 1/9/30123 blsil7:14				Form C-103 of Revised July 18, 2013
<u>District I</u> – (575) 393-6161 1625 N. French Dr., Hobbs, NM 88240 <u>District II</u> – (575) 748-1283	Energy, Minerals and Na		WELL API NO. 30-015-53180	Revised July 18, 2015
811 S. First St., Artesia, NM 88210 District III – (505) 334-6178	OIL CONSERVATIO 1220 South St. Fr		5. Indicate Type of Lea	
1000 Rio Brazos Rd., Aztec, NM 87410	Santa Fe, NM		STATE	FEE
<u>District IV</u> – (505) 476-3460 1220 S. St. Francis Dr., Santa Fe, NM 87505	Santa Fe, Mivi	87303	6. State Oil & Gas Leas	e No.
	CES AND REPORTS ON WELI	LS	7. Lease Name or Unit	Agreement Name
(DO NOT USE THIS FORM FOR PROPOS DIFFERENT RESERVOIR. USE "APPLIC PROPOSALS.)			Armstrong 35/23 E	32NC Fed Com
· · · · · · · · · · · · · · · · · · ·	Gas Well 🔲 Other		8. Well Number	1H
2. Name of Operator			9. OGRID Number	14744
Mewbourne Oil Company 3. Address of Operator			10. Pool name or Wildo	pot
PO Box 5270 Hobbs, NM 88240			JENNINGS; BONE SPRING	
4. Well Location			1700	
Unit Letter N :	230 feet from the Sou		1730 feet from the	West line
Section 35		Range 31E	NMPM Cou	nty Eddy
	11. Elevation <i>(Show whether D</i> 3300' GL	<i>R</i> , <i>RKB</i> , <i>K1</i> , <i>GR</i> , <i>etc</i> .)	
12 Charles	unuanista Davita Indianta	Nature of Nation	Demost on Other Data	
	ppropriate Box to Indicate		-	
NOTICE OF IN			SEQUENT REPOR	
		REMEDIAL WOR		
TEMPORARILY ABANDON	CHANGE PLANS	COMMENCE DR CASING/CEMEN		DA 🗌
		OAGING/GEMEN		
CLOSED-LOOP SYSTEM				
OTHER:	\[\lambda]	OTHER:		
 Describe proposed or complete of starting any proposed work proposed completion or record 	rk). SEE RULE 19.15.7.14 NM			
	mend the casing design and drill	ing plan in the approv	ved APD. Please refer to th	e
documents attached for further				
design information.				
- Procedural and Design Chang			1	
	nediate casing (Approved APD - g w/ 9.875" hole (Approved API			
, 1	(Approved APD - Run 4.5" line	1	on casing w/ 0.75 noic)	
-,				
Spud Date: 2/17/2023	Rig Release	Date: 3/15/2023		
I hereby certify that the information a	bove is true and complete to the	best of my knowledg	ge and belief.	
signature <u><i>CCW</i></u>	TITLE	Engineer	DATE	1/9/2023
Type or print name Christ	ian Ward E-mail add	ress: cward@me	wbourne.com PHONE:	(580) 754-0042
For State Use Only				
APPROVED BY:	TITLE		DATE	
Conditions of Approval (if any):				

•

rict <u>1</u> 5 N. French Dr., Hobb ne: (575) 393-6161 F rict <u>II</u> S. First St., Artesia, N ne: (575) 748-1283 F rict <u>III</u>) Rio Brazos Road, A ne: (505) 334-6178 F rict <u>IV</u>) S. St. Francis Dr., S ne: (505) 476-3460 F	Sax: (575) 393-0 NM 88210 ax: (575) 748-9 ztec, NM 8741(ax: (505) 334-6 anta Fe, NM 87.	720 0 170 2505	Energ		State of New Mexico , Minerals & Natural Resources Department OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505			Subi	mit one	Form (ised August 1, copy to appro District (1ENDED REF	
		W	VELL L	OCATIO	N AND AC	REAGE DEDIC	ATION PLA	Т			
	1 API Number	ε		2 Pool Code	;		³ Pool Nar	ne			
4Property Co 7OGRID			AI		8 Operator	B2NC FED C	COM		6 Well Number 1H 9 Elevation		
				MEWI	BOURNE O	IL COMPANY			3300'		
					¹⁰ Surface	Location					
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet From the	East/West		County	
N	35	25S	31E		230	SOUTH	1730	WES	T	EDDY	
			11]	Bottom H	Iole Location	n If Different Fr	om Surface				
TTT 1.4	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West	line	County	
UL or lot no.		25S	31E	1	100	NORTH	1980	WES		EDDY	


No allowable will be assigned to this completion until all interest have been consolidated or a non-standard unit has been approved by the division.


Ģ


1980' E	3.H. 100'			¹⁷ OPERATOR CERTIFICATION
			GEODETIC DATA	I hereby certify that the information contained herein is true and compl
 	+ '		NAD 83 GRID - NM EAST	to the best of my knowledge and belief, and that this organization either
i	i l	5281.0	SURFACE LOCATION	owns a working interest or unleased mineral interest in the land includi
)		[*]	N: 393366.6 - E: 721434.7	the proposed bottom hole location or has a right to drill this well at this
		1£,60.	LAT: 32.0801101* N LONG: 103.7518505* W	location pursuant to a contract with an owner of such a mineral or wor
		00 N	BOTTOM HOLE	interest, or to a voluntary pooling agreement or a compulsory pooling
!	+'		N: 408895.0 – E: 721634.5	order heretofore entered by the division.
I			LAT: 32.1227920* N	
5 89*56'19" W 26	Q 560.27' 5 89'49'29"	U W 2658.19'	LONG: 103.7509346 W	Signature Date
) l		- W 2640.94	<u>CORNER DATA</u> NAD 83 GRID – NM EAST	Printed Name
		1 00.11,5e	A: FOUND BRASS CAP "1939" J: FOUND BRASS CAP "1939" N: 393123.3 – E: 719706.0 N: 403723.6 – E: 724993.6	E-mail Address
)			B: FOUND BRASS CAP "1939" K: FOUND BRASS CAP "1939" N: 395768.0 – E: 719692.1 N: 401083.2 – E: 725002.4	¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well location shown on thi
		W 26.	C: FOUND BRASS CAP "1939" L: FOUND BRASS CAP "1939" N: 398416.8 – E: 719679.1 N: 398442.3 – E: 725012.1	plat was plotted from field notes of actual surveys
	+	2,35		made by me or under my supervision, and that the
		1.00 /	D: FOUND BRASS CAP "1939" M: FOUND BRASS CAP "1939" N: 401064.4 – E: 719677.2 N: 395801.2 – E: 725019.9	same is true and correct to the best of my belief.
<u>5 89'39'36" w 26</u>) 	<u>566.51' s 89'47'30"</u> P 	<u>w 2667.71'</u> ; <u>52</u> 	E: CALCULATED CORNER N: FOUND BRASS CAP "1916" N: 403712.6 – E: 719676.3 N: 393164.8 – E: 725028.3	07/20/2022
		W 26	F: FOUND BRASS CAP "1939" O: FOUND BRASS CAP "1939"	Date of Survey
		10.13	N: 406360.7 – E: 719664.4 N: 393143.8 – E: 722366.9	Signature and Seal of Profesional Surveyor
 	 		G: CALCULATED CORNER P: FOUND BRASS CAP "1939" N: 409006.7 – E: 719654.6 N: 398432.6 – E: 722344.9	19680
		2636.92'	H: FOUND BRASS CAP "1939" Q: FOUND BRASS CAP "1939" N: 408990.9 – E: 722331.0 N: 403715.4 – E: 722336.0	Test U. top
	+-		I: FOUND 2" PIPE N: 409003.4 – E: 724979.0	19680 Certificate Number
1730'	S.L.	,01.00 ,		Certificate Number
(89°33'28" E 26	230' 61.54' () N 89'32'53	" E 2662 04'		Job No.: LS22030233R


Released to Imaging: 1/12/2023 8:49:20 AM


•

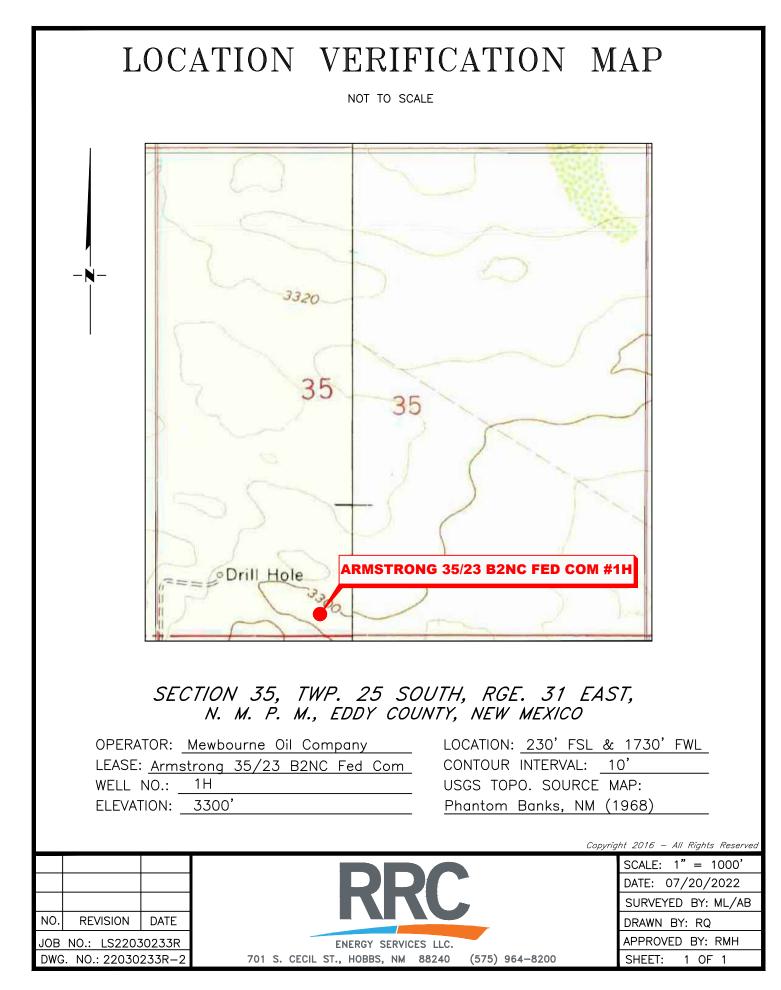


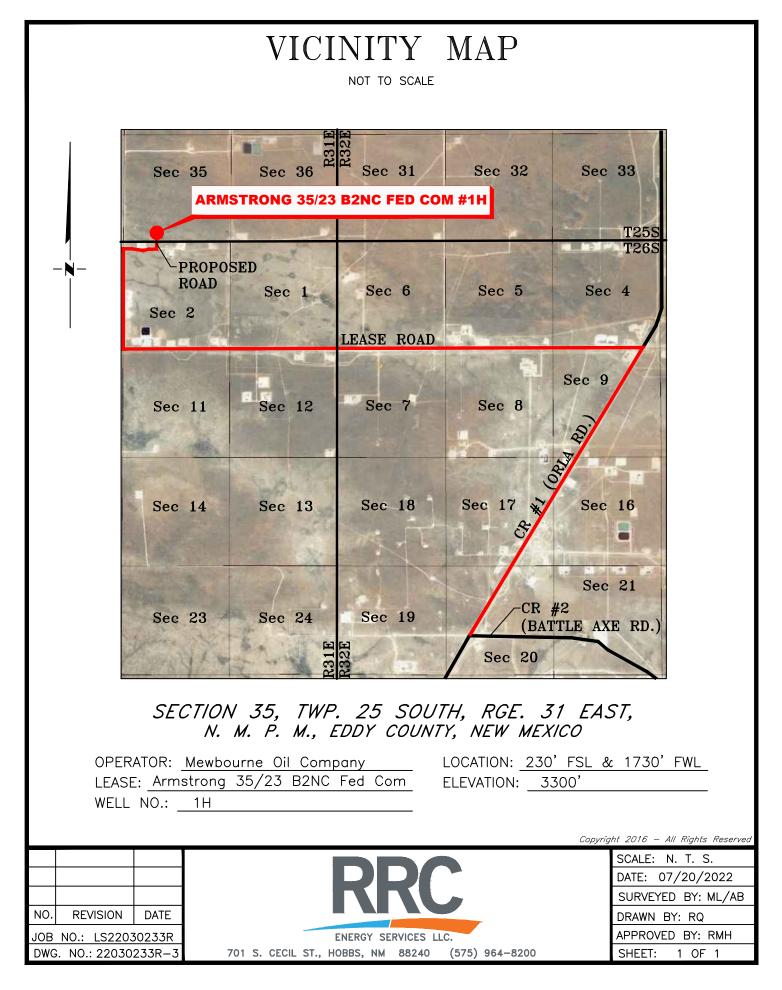

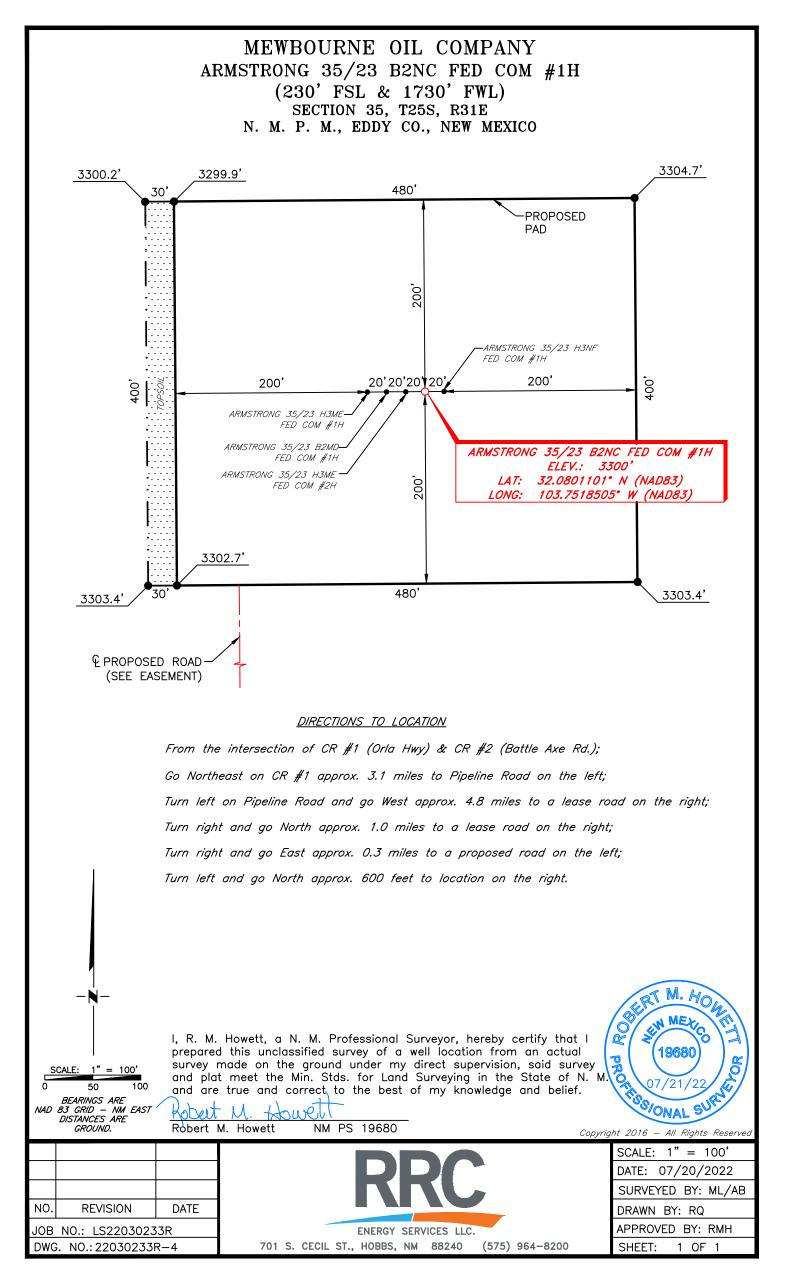

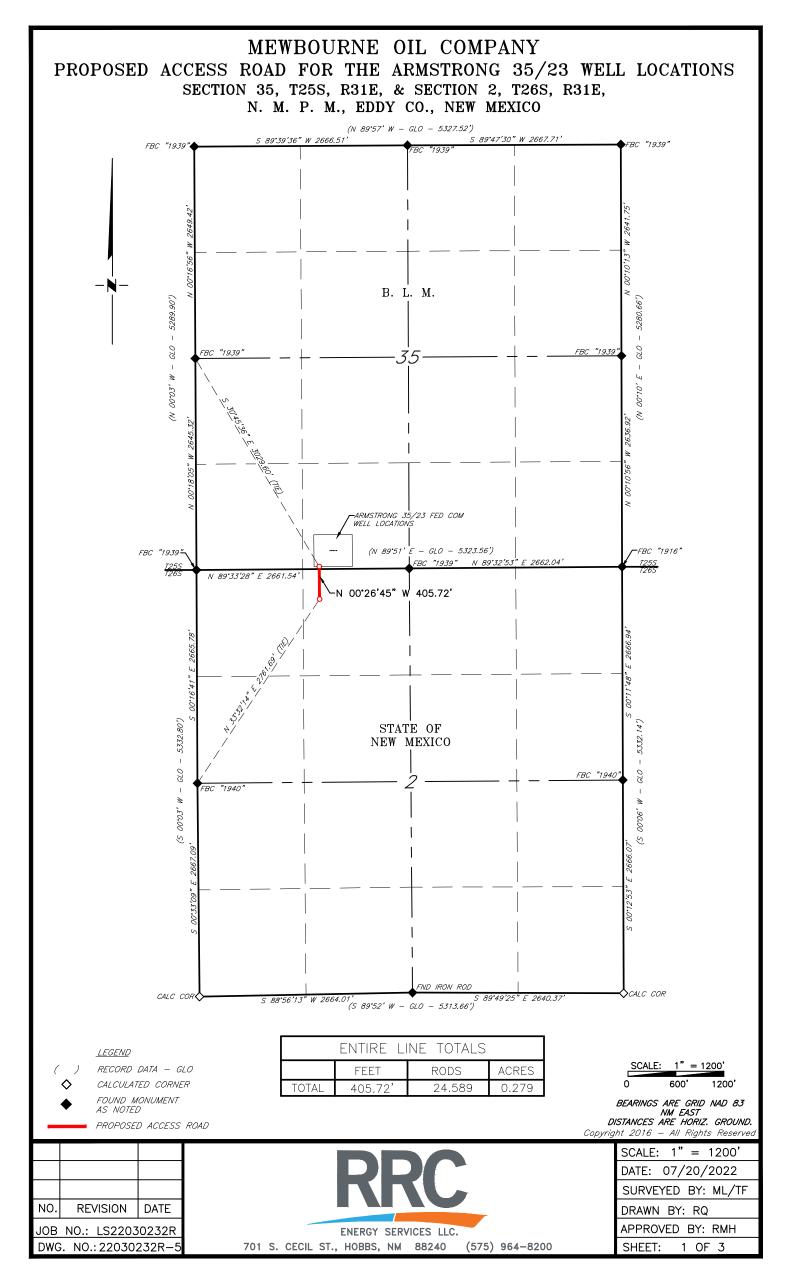

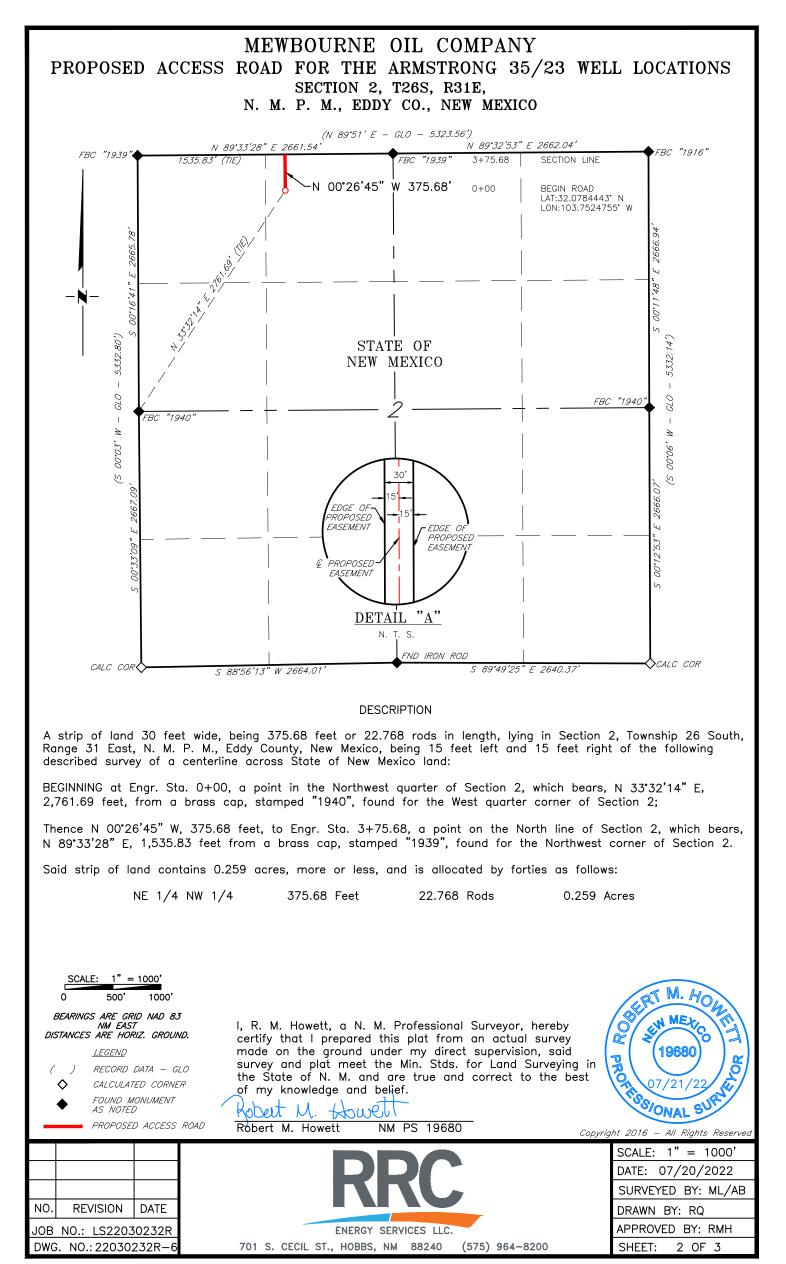

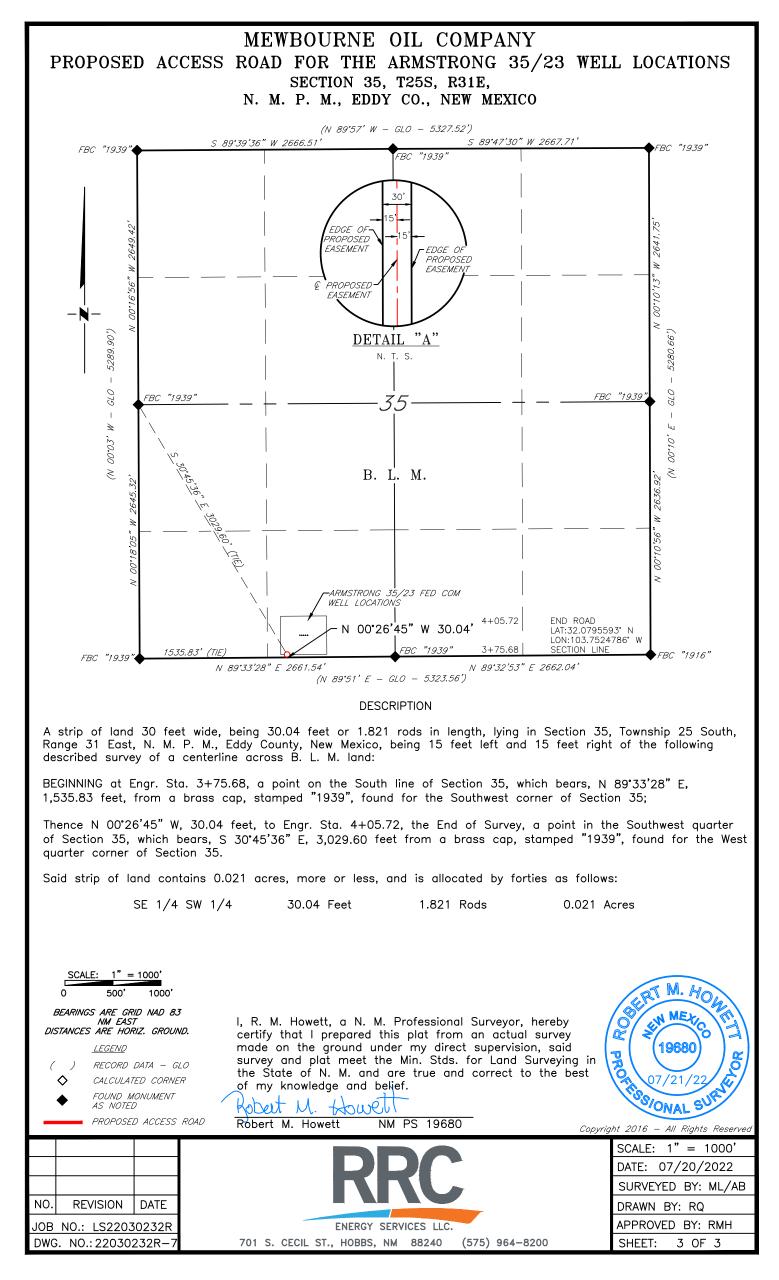





<u>10-3/4"</u>	<u>45.50#</u>	.400"	<u>SeAH-8</u>	0 High Collapse
Dimensions	(Nominal)			
Outside Diamete	r		10.750	in.
Wall			0.400	in.
Inside Diameter			9.950	in.
Drift			9.875	in.
Weight, T&C			45.500	lbs/ft
Weight, PE			44.260	lbs/ft
Performanc	e Properties			
Collapse			3120	psi
Internal Yield Pre	essure at Minimum Yiel	d		
	PE		5210	psi
	STC		5210	psi
	BTC		5210	psi
	BTC Special Clearance		4786	psi
Yield Strength, P	ipe Body		1040	1000 lbs
Joint Strength				
	STC		701	1000 lbs
	BTC		1029	1000 lbs
	BTC Special Clearance	(11.25" OD Cplg)	1029	1000 lbs

Note: SeAH Steel has produced this specification sheet for general information only. SeAH does not assume liability or responsibility for any loss or injury resulting from the use of information or data contained herein. All applications for the material described are at the customer's own risk and responsibility.

Received by OCD: 1/9/2023 11:17:14 AM

Received by OCD: 1/9/2023 11:17:14 AM

Received by OCD: 1/9/2023 11:17:14 AM

JNCONTROLLED

U. S. Steel Tubular Products 5.500" 20.00lb/ft (0.361" Wall) P110 HC USS-TALON HTQ™ RD

MECHANICAL PROPERTIES	Pipe	USS-TALON HTQ™ RD		[6]
Minimum Yield Strength	110,000	-	psi	÷
Maximum Yield Strength	140,000	-	psi	;
Minimum Tensile Strength	125,000	-	psi	,
DIMENSIONS	Pipe	USS-TALON HTQ™ RD		
Outside Diameter	5.500	5.900	in.	;
Wall Thickness	0.361		in.	,
Inside Diameter	4.778	4.778	in.	
Standard Drift	4.653	4.653	in.	
Alternate Drift	<u>578</u>)	5E)	in.	
Nominal Linear Weight, T&C	20.00		lb/ft	
Plain End Weight	19.83	<u>12</u>	lb/ft	
ECTION AREA	Pipe	USS-TALON HTQ™ RD		-
Critical Area	5.828	5.828	sq. in.	
Joint Efficiency	<u></u>	100.0	%	[2
PERFORMANCE	Pipe	USS-TALON HTQ™ RD		
Minimum Collapse Pressure	12,200	12,200	psi	-
Minimum Internal Yield Pressure	12,640	12,640	psi	
Minimum Pipe Body Yield Strength	641,000		lb	
Joint Strength		641,000	lb	
Compression Rating		641,000	lb	
Reference Length		21,370	ft	[*
Maximum Uniaxial Bend Rating		91.7	deg/100 ft	[3
AKE-UP DATA	Pipe	USS-TALON HTQ™ RD		4-
Make-Up Loss	3 44	5.58	in.	
Minimum Make-Up Torque	а н	17,000	ft-lb	[4
Maximum Make-Up Torque		20,000	ft-lb	[4
Maximum Operating Torque	3.00	39,500	ft-lb	[4

Notes

 Other than proprietary collapse and connection values, performance properties have been calculated using standard equations defined by API 5C3 and do not incorporate any additional design or safety factors, Calculations assume nominal pipe OD, nominal wall thickness, and Specified Minimum Yield Strength (SMYS).

2. Joint efficiencies are calculated by dividing the connection critical area by the pipe body area.

3 Uniaxial bend rating shown is structural only

4. Torques have been calculated assuming a thread compound friction factor of 1,0 and are recommended only. Field make-up torques may require adjustment based on actual field conditions (e.g. make-up speed, temperature, thread compound, elc.).

5. Reference length is calculated by Joint Strength divided by Nominal Linear Weight, T&C with a 1.5 Safety factor.

6 Coupling must meet minimum mechanical properties of the pipe.

Legal Notice

All material contained in this publication is for general information only. This material should not therefore be used or relied upon for any specific application without independent competent professional examination and verification of accuracy, suitability and applicability. Anyone making use of this material does so at their own risk and assumes any and all liability resulting from such use. U. S. Steel disclaims any and all expressed or implied warranties of fitness for any general or particular application.

U. S. Steel Tubular Products 460 Wildwood Forest Drive, Suite 300S Spring, Texas 77380 1-877-893-9461 connections@uss.com www.usstubular.com

.

Mewbourne Oil Company, Armstrong 35/23 B2NC Fed Com #1H Sec 35, T2S, R31E SHL: 230' FSL & 1730' FWL, Sec 35 BHL: 100' FNL & 1980' FWL, Sec 23

Casing Program			Weight			SF		SF Jt	SF Body	
Hole Size	From	То	Csg. Size	(lbs)	Grade	Conn.	Collapse	SF Burst	Tension	Tension
17.500	0'	980'	13.375	48.0	H40	STC	1.72	3.86	6.85	11.50
12.250	0'	2701'	10.750	40.5	J55	BTC	1.13	2.23	3.99	3.58
12.250	2701'	3573'	10.750	45.5	J55	BTC	1.13	1.93	12.03	10.81
12.250	3573'	4155'	10.750	45.5	N80	BTC	1.14	2.41	41.40	39.25
9.875	0'	9630'	7.625	29.7	HCP110	LTC	1.47	1.95	2.69	3.29
6.750	9430'	25770'	5.500	20.0	Talon HTQ	LTC	2.26	2.34	1.96	1.96
				RIMM	PI M Minimum Safaty Faatar		1.125	1.0	1.6 Dry	1.6 Dry
				BLM Minimum Safety Factor		1.145	1.0	1.8 Wet	1.8 Wet	

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h. Must have table for contingency casing

			Y or N		
Is casing new? If used, attach certification as required in	Onshore Order #1		Y		
Is casing API approved? If no, attach casing specification	on sheet.		Y		
Is premium or uncommon casing planned? If yes attach c	asing specification shee	et.	N		
Does the above casing design meet or exceed BLM's mit	nimum standards? If not	t provide justification (loading assumptions, casing design criteria).	Y		
Will the pipe be kept at a minimum 1/3 fluid filled to avoid	d approaching the collap	ose pressure rating of the casing?	Y		
Is well located within Capitan Reef?			N		
	C 502 1 41 F		N		
If yes, does production casing cement tie back a mini	mum of 50' above the F	Reef?			
Is well within the designated 4 string boundary.			N		
Is well located in SOPA but not in R-111-P?			N		
If yes, are the first 2 strings cemented to surface and 3 rd string cement tied back 500' into previous casing?					
Is well located in R-111-P and SOPA?					
If yes, are the first three strings cemented to surface?					
Is 2 nd string set 100' to 600' below the base of salt?					
Is an open annulus used to satisfy R-111-Q? If yes, see c	ement design.				
Is an engineered weak point used to satisfy R-111-Q?					
If yes, at what depth is the weak point planned?			-		
Is well located in high Cave/Karst?			Y		
If yes, are there two strings cemented to surface?		2	Y		
(For 2 string wells) If yes, is there a contingency casir	ig if lost circulation occ	urs?			
Is well located in critical Cave/Karst?			N		
If yes, are there three strings cemented to surface?					
Formation	Est. Top	Formation	Est. Top		
Rustler	905'	Delaware (Lamar)	4230'		
Salt Top	1242'	Bell Canyon	4255		
Salt Base	4005'	Cherry Canyon	5300'		
Yates		Manzanita Marker	5430'		
Seven Rivers		Basal Brushy Canyon	7923'		
Queen		Bone Spring	8273'		
Capitan		1st Bone Spring Sand	9228'		
Grayburg		2nd Bone Spring Sand	9833'		
San Andres		3rd Bone Spring Sand			
Glorieta	+	Abo			
Yeso		Wolfcamp	I		

Recei

Received by OCD: 1/9/2023	[1:17:14 AM				Page 15 of 1
_					DRM APPROVED MB No. 1004-0137 ires: October 31, 2021
Do not use th		ORTS ON WELLS to drill or to re-enter an APD) for such proposals		6. If Indian, Allottee of	Tribe Name
SUBMIT	IN TRIPLICATE - Other inst	ructions on page 2		7. If Unit of CA/Agree	ment, Name and/or No.
1. Type of Well Oil Well 2. Name of Operator	as Well Other			8. Well Name and No. 9. API Well No.	
3a. Address		3b. Phone No. <i>(include area code</i>)	e)	10. Field and Pool or E	Exploratory Area
4. Location of Well (Footage, Sec.,	T.,R.,M., or Survey Description	n)		11. Country or Parish,	State
12. 0	HECK THE APPROPRIATE I	BOX(ES) TO INDICATE NATURE	E OF NOT	ICE, REPORT OR OTH	ER DATA
TYPE OF SUBMISSION		TY	PE OF AC	TION	
Notice of Intent	Acidize	Deepen Hydraulic Fracturing		luction (Start/Resume) lamation	Water Shut-Off Well Integrity
Subsequent Report	Casing Repair Change Plans	New Construction Plug and Abandon		omplete porarily Abandon	Other
Final Abandonment Notice	Convert to Injectio	n 🗌 Plug Back	Wat	er Disposal	
the proposal is to deepen direct the Bond under which the work completion of the involved ope	ionally or recomplete horizonta will be perfonned or provide t rations. If the operation results	ally, give subsurface locations and n he Bond No. on file with BLM/BIA in a multiple completion or recomp	neasured a . Required	nd true vertical depths o l subsequent reports mus new interval, a Form 31	rk and approximate duration thereof. If f all pertinent markers and zones. Attach st be filed within 30 days following 60-4 must be filed once testing has been he operator has detennined that the site

14. I hereby certify that the foregoing is true and correct. Name (<i>Printed/Typed</i>)			
	Title		
Signature	Date		
THE SPACE FOR FEDE	RAL OR STATE O	FICE USE	
Approved by			
	Title		Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant certify that the applicant holds legal or equitable title to those rights in the subject lea which would entitle the applicant to conduct operations thereon.			
Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any any false, fictitious or fraudulent statements or representations as to any matter within		illfully to make to any d	epartment or agency of the United States

(Instructions on page 2)

GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are

SPECIFIC INSTRUCTIONS

Item 4 - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

Item 13: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

either shown below, will be issued by or may be obtained from the local Federal office.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c)and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

Additional Information

Location of Well

0. SHL: SESW / 230 FSL / 1730 FWL / TWSP: 25S / RANGE: 31E / SECTION: 35 / LAT: 32.0801102 / LONG: -103.7518505 (TVD: 0 feet, MD: 0 feet) PPP: SENW / 2633 FNL / 1980 FWL / TWSP: 25S / RANGE: 31E / SECTION: 23 / LAT: 32.1158153 / LONG: -103.750954 (TVD: 10362 feet, MD: 23232 feet) PPP: SENW / 2643 FSL / 1980 FWL / TWSP: 25S / RANGE: 31E / SECTION: 26 / LAT: 32.1012739 / LONG: -103.7509090 (TVD: 10318 feet, MD: 17942 feet) PPP: NESW / 1320 FSL / 1980 FWL / TWSP: 25S / RANGE: 31E / SECTION: 26 / LAT: 32.0976371 / LONG: -103.7510002 (TVD: 10307 feet, MD: 16619 feet) PPP: SESW / 0 FSL / 1980 FWL / TWSP: 25S / RANGE: 31E / SECTION: 26 / LAT: 32.0940058 / LONG: -103.7510002 (TVD: 10296 feet, MD: 15298 feet) PPP: SESW / 0 FSL / 1980 FWL / TWSP: 25S / RANGE: 31E / SECTION: 26 / LAT: 32.0940058 / LONG: -103.7510094 (TVD: 10296 feet, MD: 15298 feet) PPP: SESW / 100 FSL / 1980 FWL / TWSP: 25S / RANGE: 31E / SECTION: 35 / LAT: 32.079742 / LONG: -103.7510456 (TVD: 9988 feet, MD: 10015 feet) BHL: NENW / 100 FNL / 1980 FWL / TWSP: 25S / RANGE: 31E / SECTION: 23 / LAT: 32.1227892 / LONG: -103.7509362 (TVD: 10383 feet, MD: 25770 feet)

District I 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV 1220 S. St Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3470 Fax: (505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

CONDITIONS

Operator:	OGRID:
MEWBOURNE OIL CO	14744
P.O. Box 5270	Action Number:
Hobbs, NM 88241	174029
	Action Type:
	[C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By		Condition Date
		Dute
kpickford	Adhere to previous NMOCD Conditions of Approval	1/12/2023

CONDITIONS

Page 18 of 18

Action 174029