Signature:

Title:

Date:

Printed Name:

Email Address:

Electronically filed by Matthew Alley

Phone: 303-513-0990

Chief Financial Officer

1/6/2023

malley@silverbackexp.com

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 District III 1000 Rio Brazos Rd., Aztec, NM 87410

Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

Form C-101 August 1, 2011

Permit 331875

		APPLIC/	ATION	FOR PERMI	TTO DRILL, R	E-ENTER,	DEEPEN	N, PLUGBAC	K, OR AI	DD A ZO	NE		
Silv	ame and Address erback Operating								RID Number 330968				
	0 West, Suite 201 n Antonio, TX 7825									3. API	3. API Number 30-015-53283		
	Property Code 5. Property Name									6. Wel		50	
	3708			Krauss 22							103H		
					7. S	urface Loca	tion						
UL - Lot	Section	Township		Range	Lot Idn	Feet From		N/S Line	Feet From		E/W Line	County	
<u> </u>	22	18	S	26E			2146	S		158	Е	Eddy	
					8. Proposed	Bottom Ho	le Location	n					
UL - Lot	Section	Township	_	Range	Lot Idn	Feet Fron		N/S Line	Feet Fro		E/W Line	County	
L	22	18	S	26E	L		2174	S		100	W	Eddy	
	9. Pool Information												
ATOKA;GLO	RIETA-YESO										3250		
Additional Well Information													
11. Work Type		12. Well T	vpe		13. Cable/Rotary	iai vveii iiiio	14. Lease	Type	15.	Ground Lev	rel Elevation		
	w Well		OIL					Private			3316		
16. Multiple		17. Propos	sed Dept	th	18. Formation 19. C			Contractor 20. Spu		Spud Date			
			Yeso						5/2023				
Depth to Grou	nd water				Distance from nea	est fresh wate	n water well Distance to nearest surface water						
X We will be	using a closed-lo	op system in li	eu of lii	ned pits					<u> </u>				
					21. Proposed C	asing and C	ement Pro	ngram					
Туре	Hole Size	Casin	Size	C	Casing Weight/ft		Setting Depth		Sacks	of Cement	ent Estimated TOC		
Surf	12.25	9.6	25		36		1250		239		0		
Prod	8.75	7			32		3668				0		
Prod	8.75	5	5		20		8826 1533 2832			2832			
				C	asing/Cement Pr	ogram: Add	itional Cor	mments					
					ŭ	•							
					22. Proposed B	owout Prev	ention Pro	ogram					
Type Working Pressure					OWOULT TOV	Test Pressure Manufacturer			nufacturer				
Double Ram 5000							5000			S	Shaffer		
						_							
23. I hereby certify that the information given above is true and complete to the best of my					my			OIL CONSE	RVATION	DIVISION			
knowledge a													
	tify I have complie	ed with 19.15.1	4.9 (A)	NMAC ⊠ and/or	· 19.15.14.9 (B) N	MAC							
⋈, if applica	DIE.												

Approved By:

Approved Date:

Title:

Katherine Pickford

Expiration Date: 1/17/2025

Geoscientist

1/17/2023

Conditions of Approval Attached

District I

1625 N. French Dr., Hobbs, NM 88240 Phone: (575) 393-6161 Fax: (575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720

District III 1000 Rio Brazos Road, Aztec, NM 87410 Phone: (505) 334-6178 Fax: (505) 334-6170 District IV

1220 S. St. Francis Dr. Santa Fe. NM 87505 Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico

Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION

1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015- 53283		² Pool Code 3250	YESO	
⁴ Property Code 333708	⁵ Property Name ⁶ Well Num			⁶ Well Number 103H
⁷ OGRID No. 330968		•	perator Name COPERATING II, LLC	⁹ Elevation 3,316'


¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
I	22	18-S	26-E		2,146'	SOUTH	158'	EAST	EDDY

¹¹ Bottom Hole Location If Different From Surface

	Bottom Hote Boottom in Billion Home Santaco								
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L	22	18-S	26-E		2,174'	SOUTH	100'	WEST	EDDY
10	112	l		1.5					
12 Dedicated Acres	13 Joint o	r Infill	Consolidation	Code 15 O1	rder No.				
160									

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the

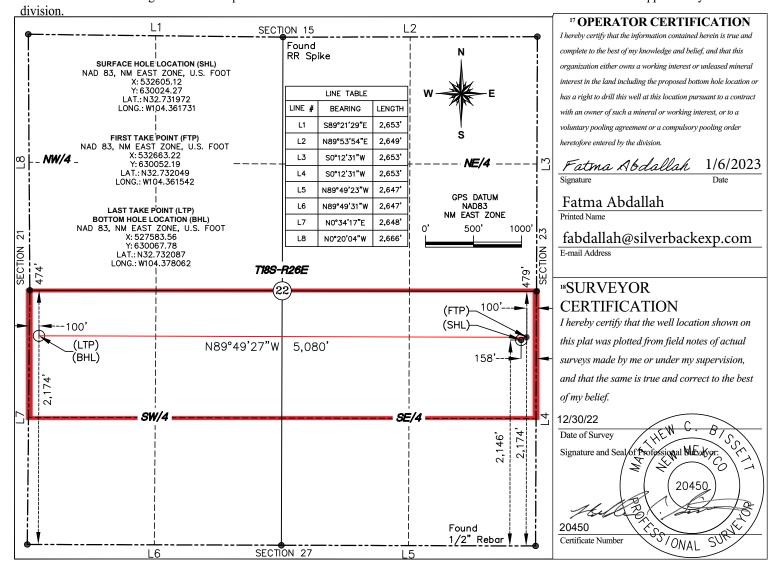

Form APD Conditions

Permit 331875

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240

Phone: (575) 393-6161 Fax: (575) 393-0720 <u>District II</u>

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 District III

1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. Santa Fe, NM 87505

PERMIT CONDITIONS OF APPROVAL

Operator N	ame and Address:	API Number:
	Silverback Operating II, LLC [330968]	30-015-53283
	IH10 West, Suite 201	Well:
	San Antonio, TX 78257	Krauss 22 #103H
OCD	Condition	
Reviewer		

OCD Reviewer	Condition
kpickford	Notify OCD 24 hours prior to casing & cement
kpickford	Will require a File As Drilled C-102 and a Directional Survey with the C-104
kpickford	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud
	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string
kpickford	Cement is required to circulate on both surface and intermediate1 strings of casing
	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system

State of New Mexico Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

$\frac{Section~1-Plan~Description}{\frac{Effective~May~25,~2021}{}}$

I. Operator:	Silverbac	k Operating II	, LLC	OGRID: _	330968	Date:	01 / 06 / 2023
II. Type: ☑ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.							
If Other, please	If Other, please describe:						
III. Well(s): Pobe recompleted	rovide the	following infingle well pad	Formation for each r or connected to a c	new or recompl central delivery	eted well or set of v point.	wells proposed to	be drilled or proposed to
Well Nai	me	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
See attached ta	able						
IV. Central Delivery Point Name: KRAUSS 22 CDP [See 19.15.27.9(D)(1) NMAC] V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point. Well Name API Spud Date TD Reached Completion Initial Flow First Production Date Commencement Date Back Date Date							
See attached ta	ıble						
See attached to	ЮС						
VI. Separation Equipment: ☐ Attach a complete description of how Operator will size separation equipment to optimize gas capture. VII. Operational Practices: ☐ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC. VIII. Best Management Practices: ☐ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.							

Section 2 – Enhanced Plan EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

🗵 Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the
production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of
the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system □ will □	will not have capacity to gather 100% of the anticipated natural gas
production volume from the well prior to the date of first production	on.

XIII. Line Pressure. Operator \square does \square does not anticipate that its existing well(s) connected to the same segme	nt, or portion,	of the
natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused	by the new we	ell(s).

Attach	Operator	'e nlan t	o manage i	production	in response	to the incre	eased line pressure
Attach	Oberaior	S Dian i	o manage i	DIOGUCTION	III TESDOUSE	to the mer	saseu iiile biessui

XIV. Confi	identiality: \square	Operator asserts	confidentiality	pursuant to	Section	71-2-8 NM	SA 1978	for the	information	provided in
Section 2 as	s provided in Pa	ragraph (2) of Su	bsection D of 1	9.15.27.9 NN	AC, and	d attaches a	full descri	ption of	the specific	information
for which co	onfidentiality is	asserted and the	basis for such a	assertion.						

Section 3 - Certifications Effective May 25, 2021

Operator certifies that, a	fter reasonable inquiry and based on the available information at the time of submittal:
one hundred percent of	to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering
hundred percent of the a into account the current	able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one nticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system. box, Operator will select one of the following:
Well Shut-In. ☐ Operat D of 19.15.27.9 NMAC	or will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection or
	an. Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential
alternative beneficial use	es for the natural gas until a natural gas gathering system is available, including:
(a)	power generation on lease;
(b)	power generation for grid;
(c)	compression on lease;
(d)	liquids removal on lease;
(e)	reinjection for underground storage;
(f)	reinjection for temporary storage;
(g)	reinjection for enhanced oil recovery;
(h)	fuel cell production; and
(i)	other alternative beneficial uses approved by the division.

Section 4 - Notices

- 1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:
- (a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or
- (b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.
- 2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: Fatma Abdallah
Printed Name: Fatma Abdallah
Title: Regulatory Manager
E-mail Address: fabdallah@silverbackexp.com
Date: 01/06/2023
Phone: 210-585-3316
OIL CONSERVATION DIVISION
(Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

III. Wells

Well Name	<u>API</u>	<u>ULSTR</u>	<u>Footages</u>	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
KRAUSS "22" 101H	30-15-	P-22-18S-26E	490' S 178' E	515	800	3000
KRAUSS "22" 102H	30-15-	P-22-18S-26E	1125'S 178'E	515	800	3000
KRAUSS "22" 103H	30-15-	P-22-18S-26E	2146' S 158' E	515	800	3000
KRAUSS "22" 201H	30-15-	P-22-18S-26E	470' S 178' E	515	800	3000
KRAUSS "22" 202H	30-15-	P-22-18S-26E	1085' S 178' E	515	800	3000
KRAUSS "22" 203H	30-15-	P-22-18S-26E	1145' S 178' E	515	800	3000
KRAUSS "22" 204H	30-15-	P-22-18S-26E	2166' S 158' E	515	800	3000

V. Anticipated Schedule

Well Name	<u>API</u>	Spud date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date_	First Production Date
KRAUSS "22" 101H	30-15-	8/30/23	9/8/23	9/17/23	10/4/23	10/4/23
KRAUSS "22" 102H	30-15-	5/28/23	6/6/23	7/5/23	8/13/23	8/13/23
KRAUSS "22" 103H	30-15-	8/9/23	8/18/23	9/6/23	9/26/23	9/26/23
KRAUSS "22" 201H	30-15-	8/21/23	8/29/23	9/17/23	10/4/23	10/4/23
KRAUSS "22" 202H	30-15-	6/7/23	6/15/23	7/15/23	8/13/23	8/13/23
KRAUSS "22" 203H	30-15-	5/18/23	5/26/23	7/5/23	8/13/23	8/13/23
KRAUSS "22" 204H	30-15-	7/31/23	8/8/23	9/6/23	9/26/23	9/26/23

Separation Equipment

Silverback Operating II (LLC) has sampled existing producing wells and performed laboratory testing to determine composition. Performance of existing producing wells was analyzed to predict expected production volumes including a low probably, high volume production case (approximately 75% higher than type curve or most likely amount of production). Production composition and the volumes were utilized as inputs to a process model which predicts relative amounts of gas, oil and water throughout the process. The high volume case was used to size equipment, piping and instrumentation. Equipment sizing is based on drop settlement and limits the amount of carry over to the gas phase.

Each well has a dedicated 3 phase separator and gas from that separator is taken directly to gas sales. Facility piping and pipeline were sized to allow peak volumes to flow with minimal pressure loss and deliver to midstream gatherer at an acceptable pressure. Water is conveyed directly to tankage.

Oil from 3 phase separators is comingled and conveyed to a heated separator for enhanced liquid-liquid separation and degassing. Vapors from the heater treater are routed to a Vapor Recovery Unit (VRU).

Oil and water storage tanks vapor outlets are common and utilize a closed vent vapor system to ensure all working & breathing and flashing losses are routed to the Vapor Recovery Unit (VRU) Site VRUs are sized to accommodate peak expected production volume. Flash volumes were estimated using the high volume case and process modeling software. Gas from the VRU outlet is combined with 1st stage separation gas and sent to sales.

Venting and Flaring

Silverback Operating II, LLC will ensure pipeline connectivity before producing hydrocarbons and will operate a closed vent vapor capture system that is designed to capture all associated and evolved gas during normal operation. Venting or flaring will only occur during start up and shut down, maintenance activities or equipment failure or upset. Silverback may utilize the following from list A-I of Section 3 for its operations to minimize flaring:

- a) Power generation on lease Natural gas driven gen set to produce power required to run supply well pad electrical loads
- c) Compression on lease gas lift or gas compression as required
- d) Liquids removal on lease gas pressure will be used to convey fluids as needed

Best Management Practices

Silverback utilizes automate engineering controls included in facility design to minimize venting and flaring. Additionally, operational best practices support minimization of flare and venting as described below.

If the main gas outlet becomes unavailable and pressure increases on the outlet sales line, produced gas will be routed directly to the facility flare. The facility control system will alert personnel to the need for maintenance and appropriate response to the temporary flaring event.

The facility design includes a closed vent vapor capture system to route flash or evolved from the heater treater and tanks to the Vapor Recovery Unit (VRU) Compressor. If the VRU requires planned or unplanned maintenance, vapors will automatically be routed to the facility flare.

For maintenance activities, Silverback will utilize the facility flare to blowdown equipment and piping whenever practical to minimize venting

Silverback Exploration

Eddy County, NM (NAD 83 NME) Krauss 22 103H Krauss 22 103H OH

Plan: Plan 0.1

SilverBack Plan Report

30 December, 2022

SilverBack Plan Report

Silverback Exploration Company:

Project: Eddy County, NM (NAD 83 NME)

Site: Krauss 22 103H Well: Krauss 22 103H

Wellbore: ОН Design: Plan 0.1 Local Co-ordinate Reference:

Well Krauss 22 103H

Well @ 3331.00usft (14'KB) Well @ 3331.00usft (14'KB)

North Reference: Grid

Survey Calculation Method: Minimum Curvature Database: EDM 5000.17-Aim-DB

Eddy County, NM (NAD 83 NME) **Project**

Map System:

US State Plane 1983

Geo Datum: Map Zone:

North American Datum 1983 New Mexico Eastern Zone

System Datum:

TVD Reference:

MD Reference:

Mean Sea Level

Krauss 22 103H Site

Site Position:

From:

Lat/Long

Northing: Easting:

Slot Radius:

630,024.19 usft 532.605.21 usft

Latitude: Longitude:

-104.36173 -0.02 °

Position Uncertainty: 0.00 usft 13-3/16 " **Grid Convergence:**

Well Krauss 22 103H

Well Position +N/-S +E/-W

0.00 usft 0.00 usft Northing: Easting:

630,024.19 usft 532.605.21 usft

Latitude: Longitude:

32.73197 -104.36173

32.73197

Position Uncertainty

0.00 usft

usft

Ground Level: 3.317.00 usft

Wellbore

ОН

Magnetics	Model Name	Sample Date	Declination	Dip Angle	Field Strength	
			(°)	(°)	(nT)	
	MVHD	10/7/2022	6.86	60.38	47,649.27148410	

Wellhead Elevation:

Design

Plan 0.1

Audit Notes:

Version:

Phase:

PLAN Tie On Depth: 0.00

Vertical Section:

Depth From (TVD) (usft) 0.00

+N/-S (usft) 0.00

+E/-W (usft) 0.00

Direction (°) 270.00

Survey Tool Program

Date 12/30/2022

From (usft) То

(usft) Survey (Wellbore) **Tool Name** MWD+HRGM Description

0.00 8,826.02 Plan 0.1 (OH) OWSG MWD + HRGM

SilverBack Plan Report

Company:

Silverback Exploration

Project:

Eddy County, NM (NAD 83 NME)

Site:

Krauss 22 103H

Well:

Krauss 22 103H

Wellbore:

Design:

OH Plan 0.1 **Local Co-ordinate Reference:**

TVD Reference:

MD Reference:

North Reference:

Survey Calculation Method:

Database:

Well Krauss 22 103H

Well @ 3331.00usft (14'KB)

Well @ 3331.00usft (14'KB)

Grid

Minimum Curvature

EDM 5000.17-Aim-DB

nned Survey									
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	V. Sec (usft)	DLeg (°/100usft)	Latitude (°)	Longitude (°)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.000	32.73197	-104.36173
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.000	32.73197	-104.36173
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.000	32.73197	-104.36173
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.000	32.73197	-104.36173
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.000	32.73197	-104.36173
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.000	32.73197	-104.36173
Build: 3.5°/100									404.004=0
600.00	3.50	88.59	599.94	0.08	3.05	-3.05	3.500	32.73197	-104.36172
700.00	7.00	88.59	699.50	0.30	12.20	-12.20	3.500	32.73197	-104.36169
800.00	10.50	88.59	798.32	0.67	27.40	-27.40	3.500	32.73197	-104.36164
900.00	14.00	88.59	896.03	1.20	48.61	-48.61	3.500	32.73198	-104.36157
1,000.00	17.50	88.59	992.26	1.86	75.74	-75.74	3.500	32.73198	-104.36148
1,100.00	21.00	88.59	1,086.66	2.67	108.70	-108.70	3.500	32.73198	-104.36138
1,200.00	24.50	88.59	1,178.86	3.62	147.35	-147.35	3.500	32.73198	-104.36125
1,300.00	28.00	88.59	1,268.54	4.71	191.56	-191.56	3.500	32.73199	-104.36111
1,400.00	31.50	88.59	1,355.34	5.93	241.16	-241.16	3.500	32.73199	-104.36095
1,500.00	35.00	88.59	1,438.96	7.28	295.96	-295.96	3.500	32.73199	-104.36077
1,600.00	38.50	88.59	1,519.07	8.75	355.77	-355.77	3.500	32.73200	-104.36057
1,641.01	39.94	88.59	1,550.84	9.39	381.69	-381.69	3.500	32.73200	-104.36049
	nc, 88.59° Azm								
1,700.00	39.94	88.59	1,596.07	10.32	419.54	-419.54	0.000	32.73200	-104.36037
1,800.00	39.94	88.59	1,672.75	11.90	483.72	-483.72	0.000	32.73201	-104.36016
1,900.00	39.94	88.59	1,749.43	13.48	547.89	-547.89	0.000	32.73201	-104.35995
2,000.00	39.94	88.59	1,826.11	15.05	612.06	-612.06	0.000	32.73201	-104.35974
2,100.00	39.94	88.59	1,902.78	16.63	676.23	-676.23	0.000	32.73202	-104.35953
2,138.36	39.94	88.59	1,932.20	17.24	700.85	-700.85	0.000	32.73202	-104.35945
	@ 2138.36' MD								
2,150.00	38.77	88.55	1,941.20	17.42	708.23	-708.23	10.000	32.73202	-104.35943

SilverBack Plan Report

Company: Project:

Silverback Exploration

Eddy County, NM (NAD 83 NME)

Site:

Well:

Krauss 22 103H

Wellbore: Design:

OH Plan 0.1

Krauss 22 103H

TVD Reference: MD Reference:

Local Co-ordinate Reference:

North Reference:

Survey Calculation Method: Database:

Well Krauss 22 103H

Well @ 3331.00usft (14'KB)

Well @ 3331.00usft (14'KB)

Grid

Minimum Curvature

EDM 5000.17-Aim-DB

nned Survey									
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	V. Sec (usft)	DLeg (°/100usft)	Latitude (°)	Longitude (°)
2,200.00	33.77	88.35	1,981.49	18.22	737.79	-737.79	10.000	32.73202	-104.35933
2,250.00	28.77	88.09	2,024.22	19.02	763.73	-763.73	10.000	32.73202	-104.35925
2,300.00	23.78	87.74	2,069.03	19.82	785.84	-785.84	10.000	32.73203	-104.35918
2,350.00	18.78	87.20	2,115.61	20.61	803.96	-803.96	10.000	32.73203	-104.35912
2,400.00	13.79	86.30	2,163.59	21.39	817.96	-817.96	10.000	32.73203	-104.35907
2,450.00	8.80	84.40	2,212.61	22.15	827.71	-827.71	10.000	32.73203	-104.35904
2,500.00	3.85	77.63	2,262.29	22.88	833.16	-833.16	10.000	32.73204	-104.35902
2,550.00	1.47	302.30	2,312.25	23.58	834.26	-834.26	10.000	32.73204	-104.35902
Maximum Bad	ckBuild								
2,600.00	6.29	276.78	2,362.13	24.25	831.00	-831.00	10.000	32.73204	-104.35903
2,650.00	11.26	273.54	2,411.53	24.87	823.40	-823.40	10.000	32.73204	-104.35905
2,700.00	16.25	272.27	2,460.08	25.45	811.53	-811.53	10.000	32.73204	-104.35909
2,750.00	21.25	271.59	2,507.41	25.98	795.47	-795.47	10.000	32.73204	-104.35914
2,800.00	26.25	271.15	2,553.16	26.45	775.35	-775.35	10.000	32.73205	-104.35921
2,850.00	31.24	270.85	2,596.98	26.87	751.31	-751.31	10.000	32.73205	-104.35929
2,900.00	36.24	270.63	2,638.55	27.22	723.55	-723.55	10.000	32.73205	-104.35938
2,950.00	41.24	270.45	2,677.53	27.51	692.27	-692.27	10.000	32.73205	-104.35948
3,000.00	46.24	270.30	2,713.65	27.74	657.71	-657.71	10.000	32.73205	-104.35959
3,050.00	51.24	270.18	2,746.61	27.89	620.14	-620.14	10.000	32.73205	-104.35971
3,100.00	56.24	270.07	2,776.17	27.98	579.83	-579.83	10.000	32.73205	-104.35985
3,137.61	60.00	270.00	2,796.04	28.00	547.90	-547.90	10.000	32.73205	-104.35995
Hold: 60.00° l	nc, 270.00° Azn	n							
3,200.00	60.00	270.00	2,827.23	28.00	493.87	-493.87	0.000	32.73205	-104.36012
3,300.00	60.00	270.00	2,877.23	28.00	407.27	-407.27	0.000	32.73205	-104.36041
3,337.61	60.00	270.00	2,896.04	28.00	374.69	-374.69	0.000	32.73205	-104.36051
Build: 10°/100)								
3,350.00	61.24	270.00	2,902.11	28.00	363.90	-363.90	10.000	32.73205	-104.36055
3,400.00	66.24	270.00	2,924.23	28.00	319.07	-319.07	10.000	32.73205	-104.36069

SilverBack Plan Report

Company: Project:

Silverback Exploration

Eddy County, NM (NAD 83 NME)

Site:

Krauss 22 103H

Well:

Krauss 22 103H

Design:

Wellbore:

OH Plan 0.1 Local Co-ordinate Reference:

TVD Reference:

MD Reference:

North Reference:

Survey Calculation Method: Database:

Well Krauss 22 103H

Well @ 3331.00usft (14'KB)

Well @ 3331.00usft (14'KB)

Grid

Minimum Curvature

EDM 5000.17-Aim-DB

Planned	Survey
---------	--------

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	V. Sec (usft)	DLeg (°/100usft)	Latitude (°)	Longitude (°)
3,450.00	71.24	270.00	2,942.35	28.00	272.49	-272.49	10.000	32.73205	-104.36084
3,500.00	76.24	270.00	2,956.35	28.00	224.51	-224.51	10.000	32.73205	-104.36100
3,550.00	81.24	270.00	2,966.11	28.00	175.49	-175.49	10.000	32.73205	-104.36116
3,600.00	86.24	270.00	2,971.56	28.00	125.80	-125.80	10.000	32.73205	-104.36132
3,650.00	91.24	270.00	2,972.66	28.00	75.83	-75.83	10.000	32.73205	-104.36148
3,667.84	93.02	270.00	2,972.00	28.00	58.00	-58.00	10.000	32.73205	-104.36154
LP/Hold: 93.0	2° Inc, 270.00°	Azm							
3,700.00	93.02	270.00	2,970.30	28.00	25.89	-25.89	0.000	32.73205	-104.36165
3,800.00	93.02	270.00	2,965.03	28.00	-73.97	73.97	0.000	32.73205	-104.36197
3,900.00	93.02	270.00	2,959.76	28.00	-173.84	173.84	0.000	32.73205	-104.36230
4,000.00	93.02	270.00	2,954.48	28.00	-273.70	273.70	0.000	32.73205	-104.36262
4,100.00	93.02	270.00	2,949.21	28.00	-373.56	373.56	0.000	32.73205	-104.36295
4,200.00	93.02	270.00	2,943.94	28.00	-473.42	473.42	0.000	32.73205	-104.36327
4,300.00	93.02	270.00	2,938.67	28.00	-573.28	573.28	0.000	32.73205	-104.36360
4,400.00	93.02	270.00	2,933.39	28.00	-673.14	673.14	0.000	32.73205	-104.36392
4,500.00	93.02	270.00	2,928.12	28.00	-773.00	773.00	0.000	32.73205	-104.36424
4,600.00	93.02	270.00	2,922.85	28.00	-872.86	872.86	0.000	32.73205	-104.36457
4,700.00	93.02	270.00	2,917.57	28.00	-972.72	972.72	0.000	32.73205	-104.36489
4,800.00	93.02	270.00	2,912.30	28.00	-1,072.58	1,072.58	0.000	32.73205	-104.36522
4,900.00	93.02	270.00	2,907.03	28.00	-1,172.44	1,172.44	0.000	32.73205	-104.36554
5,000.00	93.02	270.00	2,901.75	28.00	-1,272.31	1,272.31	0.000	32.73205	-104.36587
5,100.00	93.02	270.00	2,896.48	28.00	-1,372.17	1,372.17	0.000	32.73205	-104.36619
5,200.00	93.02	270.00	2,891.21	28.00	-1,472.03	1,472.03	0.000	32.73205	-104.36652
5,300.00	93.02	270.00	2,885.93	28.00	-1,571.89	1,571.89	0.000	32.73205	-104.36684
5,400.00	93.02	270.00	2,880.66	28.00	-1,671.75	1,671.75	0.000	32.73205	-104.36717
5,500.00	93.02	270.00	2,875.39	28.00	-1,771.61	1,771.61	0.000	32.73205	-104.36749
5,600.00	93.02	270.00	2,870.11	28.00	-1,871.47	1,871.47	0.000	32.73205	-104.36782

SilverBack Plan Report

Company:

Silverback Exploration

Project:

Eddy County, NM (NAD 83 NME)

Site:

Well:

Krauss 22 103H

Wellbore: Design:

OH

Krauss 22 103H

Plan 0.1

Local Co-ordinate Reference:

TVD Reference: MD Reference:

Well @ 3331.00usft (14'KB) Well @ 3331.00usft (14'KB) Grid

Well Krauss 22 103H

North Reference:

Survey Calculation Method:

Minimum Curvature

Database:

EDM 5000.17-Aim-DB

Planned Survey

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	V. Sec (usft)	DLeg (°/100usft)	Latitude (°)	Longitude (°)
5,700.00	93.02	270.00	2,864.84	28.00	-1,971.33	1,971.33	0.000	32.73205	-104.36814
5,800.00	93.02	270.00	2,859.57	28.00	-2,071.19	2,071.19	0.000	32.73205	-104.36847
5,900.00	93.02	270.00	2,854.29	28.00	-2,171.05	2,171.05	0.000	32.73205	-104.36879
6,000.00	93.02	270.00	2,849.02	28.00	-2,270.91	2,270.91	0.000	32.73205	-104.36912
6,100.00	93.02	270.00	2,843.75	28.00	-2,370.77	2,370.77	0.000	32.73205	-104.36944
6,200.00	93.02	270.00	2,838.47	28.00	-2,470.64	2,470.64	0.000	32.73205	-104.36977
6,300.00	93.02	270.00	2,833.20	28.00	-2,570.50	2,570.50	0.000	32.73205	-104.37009
6,400.00	93.02	270.00	2,827.93	28.00	-2,670.36	2,670.36	0.000	32.73205	-104.37042
6,500.00	93.02	270.00	2,822.66	28.00	-2,770.22	2,770.22	0.000	32.73205	-104.37074
6,600.00	93.02	270.00	2,817.38	28.00	-2,870.08	2,870.08	0.000	32.73205	-104.37106
6,700.00	93.02	270.00	2,812.11	28.00	-2,969.94	2,969.94	0.000	32.73205	-104.37139
6,800.00	93.02	270.00	2,806.84	28.00	-3,069.80	3,069.80	0.000	32.73205	-104.37171
6,900.00	93.02	270.00	2,801.56	28.00	-3,169.66	3,169.66	0.000	32.73205	-104.37204
7,000.00	93.02	270.00	2,796.29	28.00	-3,269.52	3,269.52	0.000	32.73205	-104.37236
7,100.00	93.02	270.00	2,791.02	28.00	-3,369.38	3,369.38	0.000	32.73205	-104.37269
7,200.00	93.02	270.00	2,785.74	28.00	-3,469.24	3,469.24	0.000	32.73205	-104.37301
7,300.00	93.02	270.00	2,780.47	28.00	-3,569.11	3,569.11	0.000	32.73205	-104.37334
7,400.00	93.02	270.00	2,775.20	28.00	-3,668.97	3,668.97	0.000	32.73205	-104.37366
7,500.00	93.02	270.00	2,769.92	28.00	-3,768.83	3,768.83	0.000	32.73205	-104.37399
7,600.00	93.02	270.00	2,764.65	28.00	-3,868.69	3,868.69	0.000	32.73205	-104.37431
7,700.00	93.02	270.00	2,759.38	28.00	-3,968.55	3,968.55	0.000	32.73205	-104.37464
7,800.00	93.02	270.00	2,754.10	28.00	-4,068.41	4,068.41	0.000	32.73205	-104.37496
7,900.00	93.02	270.00	2,748.83	28.00	-4,168.27	4,168.27	0.000	32.73205	-104.37529
8,000.00	93.02	270.00	2,743.56	28.00	-4,268.13	4,268.13	0.000	32.73205	-104.37561
8,100.00	93.02	270.00	2,738.28	28.00	-4,367.99	4,367.99	0.000	32.73204	-104.37594
8,200.00	93.02	270.00	2,733.01	28.00	-4,467.85	4,467.85	0.000	32.73204	-104.37626
8,300.00	93.02	270.00	2,727.74	28.00	-4,567.71	4,567.71	0.000	32.73204	-104.37659

SilverBack Plan Report

Company:

Silverback Exploration

Project:

Eddy County, NM (NAD 83 NME)

Site:

Krauss 22 103H

Well:

Krauss 22 103H

Wellbore: Design:

OH Plan 0.1 Local Co-ordinate Reference:

TVD Reference:

MD Reference:

Well @ 3331.00usft (14'KB) Well @ 3331.00usft (14'KB)

North Reference: Grid

Survey Calculation Method:

Database:

Minimum Curvature

Well Krauss 22 103H

EDM 5000.17-Aim-DB

Planned Survey

MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	V. Sec (usft)	DLeg (°/100usft)	Latitude (°)	Longitude (°)
8,400.00	93.02	270.00	2,722.46	28.00	-4,667.57	4,667.57	0.000	32.73204	-104.37691
8,500.00	93.02	270.00	2,717.19	28.00	-4,767.44	4,767.44	0.000	32.73204	-104.37723
8,600.00	93.02	270.00	2,711.92	28.00	-4,867.30	4,867.30	0.000	32.73204	-104.37756
8,700.00	93.02	270.00	2,706.65	28.00	-4,967.16	4,967.16	0.000	32.73204	-104.37788
8,800.00	93.02	270.00	2,701.37	28.00	-5,067.02	5,067.02	0.000	32.73204	-104.37821
8,826.02	93.02	270.00	2,700.00	28.00	-5,093.00	5,093.00	0.000	32.73204	-104.37829
PBHL									

P	lan	Aı	٦n	O	ta	ti	a	n	2

Measured	Vertical	Local Coor	dinates	
Depth (usft)	Depth (usft)	+N/-S (usft)	+E/-W (usft)	Comment
500.00	500.00	0.00	0.00	Build: 3.5°/100
1,641.01	1,550.84	9.39	381.69	Hold: 39.94° Inc, 88.59° Azm
2,138.36	1,932.20	17.24	700.85	KOP: 10°/100' @ 2138.36' MD
2,550.00	2,312.25	23.58	834.26	Maximum BackBuild
3,137.61	2,796.04	28.00	547.90	Hold: 60.00° Inc, 270.00° Azm
3,337.61	2,896.04	28.00	374.69	Build: 10°/100
3,667.84	2,972.00	28.00	58.00	LP/Hold: 93.02° Inc, 270.00° Azm
8,826.02	2,700.00	28.00	-5,093.00	PBHL