

Submit 1 Copy To Appropriate District

Office

District I – (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II – (575) 748-1283
811 S. First St., Artesia, NM 88210
District III – (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV – (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-015-01690
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No. 309175
7. Lease Name or Unit Agreement Name Washington 33 State
8. Well Number 25
9. OGRID Number 873
10. Pool name or Wildcat Artesia; Queen-Grayburg-San Andres(3230)

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well ☐ Gas Well ☐ Other Injection ☐	
2. Name of Operator Apache Corporation	
3. Address of Operator 303 Veterans Airpark Lane, Suite 1000 Midland, TX 79705	
4. Well Location Unit Letter <u>N</u> : <u>660</u> feet from the <u>S</u> line and <u>1980</u> feet from the <u>W</u> line Section <u>33</u> Township <u>17S</u> Range <u>28E</u> NMPM County <u>Eddy</u>	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3668	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☐	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☒	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☐	P AND A ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASING/CEMENT JOB ☐	
DOWNHOLE COMMINGLE ☐			
CLOSED-LOOP SYSTEM ☐			
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

apapche is requesting to TA wellbore

1. Notify NMOCD of plan to conduct MIT prior to workover.
2. Disconnect, isolate, lock-out surface mechanical and electrical equipment.
3. POOH all equipment. **A. Set CIBP @ 3720' W 35' cmt - WOC & tag - SA perfs** **B. Set CIBP @ 2400' w/ 35' cmt - WOC & tag - Yeso Perfs**
4. Set CIBP @ 1,452 ft.
5. Dump bail 35 ft of cement on top of CIBP.
6. Tag Cement – notify NMOCD ready to conduct MIT.
7. Circulate pkr fluid.
8. Conduct MIT, increase pressure within prod csg up to 500 psig, and hold for 30min

Spud Date:

Rig Release Date:

TA status may be granted after a successful MIT test is performed. Contact the OCD to schedule the test so it may be witnessed.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE alicia fulton TITLE Reg Analyst DATE 8/22/2023

Type or print name ALICIA FULTON E-mail address: alicia.fulton@apachecorp.com PHONE: (432) 818-1088

For State Use Only

APPROVED BY: [Signature] TITLE Staff Manager DATE 8/24/23
Conditions of Approval (if any):




WBD Proposed - TA

Well Name: WASHINGTON 33 STATE #025

Reference Datum: KB

API/Surface Loc 3001501690	Surface Legal Location SEC 33, T17S, R28E	Field Name Empire	State/Province New Mexico	Well Purpose Production
Spud Date 5/8/1960 16:00	Original KB Elevation (ft) 3,683.0	Ground Elevation (ft) 3,668.0	KB-Ground Distance (ft) 15.0	
PBTD (All) (ftKB) Original Hole - 3,726		Total Depth All (TVD) (ftKB)		

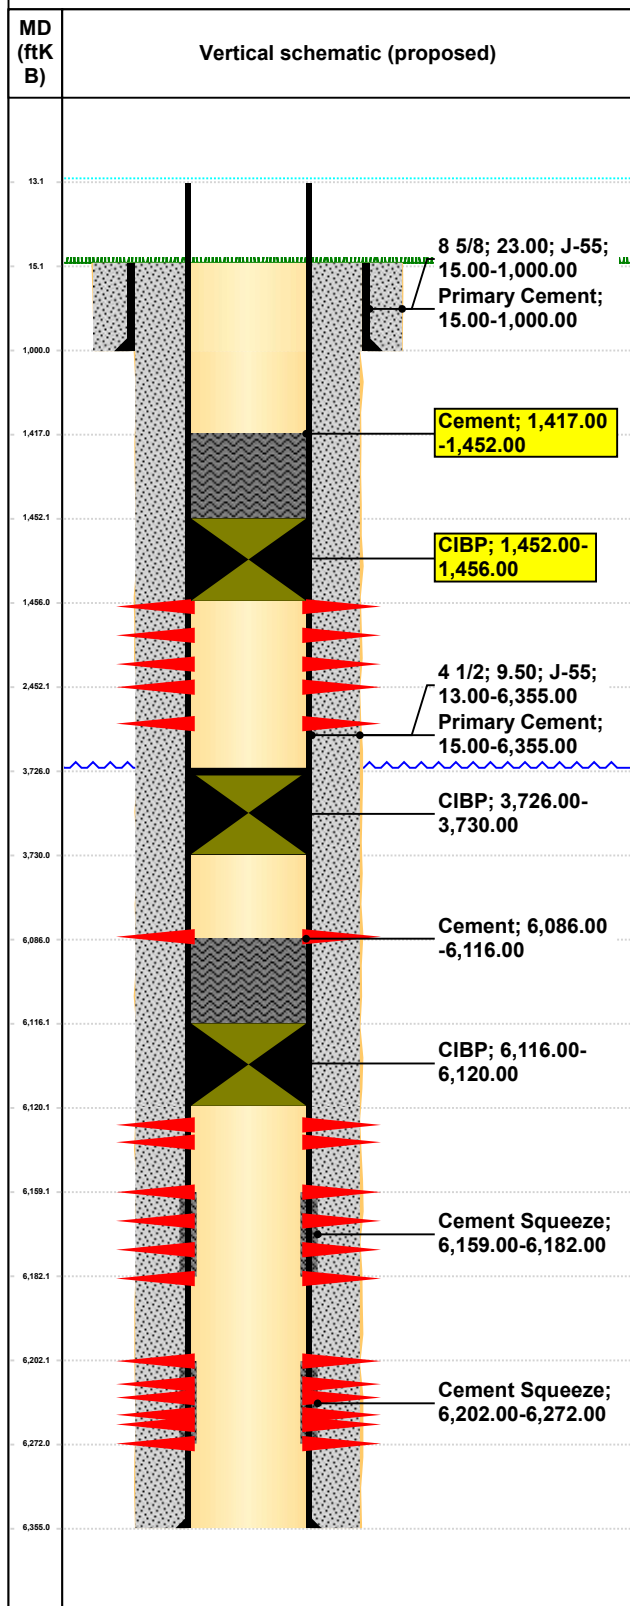Production, WASHINGTON 33 STATE #25 - Original Hole,
8/8/2023 10:55:55 AM

Wellbore Sections

Section Des	Size (in)	Act Top (ftKB)	Act Btm (ftKB)	Start Date
Surface	11	15.0	1,000.0	5/8/1960
Prod 1	7 7/8	1,000.0	6,355.0	5/11/1960

Casing Strings

Csg Des	OD (in)	Wt/Len (lb/ft)	Grade	Set Depth (ftKB)
Surface	8 5/8	23.00	J-55	1,000.00
Prod 1	4 1/2	9.50	J-55	6,355.00

Cement Stages

Des	String	Top (ftKB)	Btm (ftKB)	Start Date
Primary Cement	Surface, 1,000.00ftKB, 8 5/8	15.00	1,000.00	5/11/1960
Cement Plug	Prod 1, 6,355.00ftKB, 4 1/2	6,086.00	6,116.00	6/13/1991
Primary Cement	Prod 1, 6,355.00ftKB, 4 1/2	15.00	6,355.00	
	Prod 1, 6,355.00ftKB, 4 1/2	1,417.00	1,452.00	
Cement Squeeze	Prod 1, 6,355.00ftKB, 4 1/2	6,159.00	6,182.00	
Cement Squeeze	Prod 1, 6,355.00ftKB, 4 1/2	6,202.00	6,272.00	

Tubing Strings

Tubing Description		Run Date		String Length (ft)	Set Depth (ftKB)		
Item Des	Jts	Make/Manufacturer	Model	OD (in)	Wt (lb/ft)	Grade	Len (ft)

Rod Strings

Rod Description		Run Date		String Length (ft)		Set Depth (ftKB)		
Item Des		Jts	Make/Mfg.	Model	OD (in)	Wt (lb/ft)	Grade	Len (ft)

Other In Hole

Des	Icon	OD (in)	Top (ftKB)	Btm (ftKB)	Run Date
CIBP		4.09	1,452	1,456	8/8/2023
CIBP		4.09	3,726	3,730	7/23/1999
CIBP		4.09	6,116	6,120	6/13/1991

Perforations

Date	Type	Top (ftKB)	Btm (ftKB)	Prop?	Shot Dens (shots/ft)	Entered Shot Total
4/17/1999	PERFORATED	1,502	2,188	No	1.0	33
8/12/1998	PERFORATED	2,452	3,008	No	1.0	51
6/27/1978	PERFORATED	6,057	6,068	No	2.0	22
6/27/1978	PERFORATED	6,128	6,136	No	2.0	24
6/27/1978	PERFORATED	6,159	6,182	No	2.0	24
6/17/1960	PERFORATED	6,202	6,222	No	1.0	20
6/17/1960	PERFORATED	6,233	6,246	No	1.0	33
6/17/1960	PERFORATED	6,255	6,272	No	1.0	17

Plug Back Total Depths

Date	Type	Depth (ftKB)	Depth (TVD) (ftKB)
6/17/1960		6,192	
8/20/2007		3,176	
6/4/2014		3,726	

Schematic Annotations

Start Date	Depth (ftKB)	Annotation
------------	--------------	------------



WBD Current


Well Name: WASHINGTON 33 STATE #025

Reference Datum: KB

API/Surface Loc 3001501690	Surface Legal Location SEC 33, T17S, R28E	Field Name Empire	State/Province New Mexico	Well Purpose Production
Spud Date 5/8/1960 16:00	Original KB Elevation (ft) 3,683.0	Ground Elevation (ft) 3,668.0	KB-Ground Distance (ft) 15.0	
PBTD (All) (ftKB) Original Hole - 3,726		Total Depth All (TVD) (ftKB)		

Production, WASHINGTON 33 STATE #25 - Original Hole,
8/8/2023 10:46:26 AM

Vertical schematic (actual)

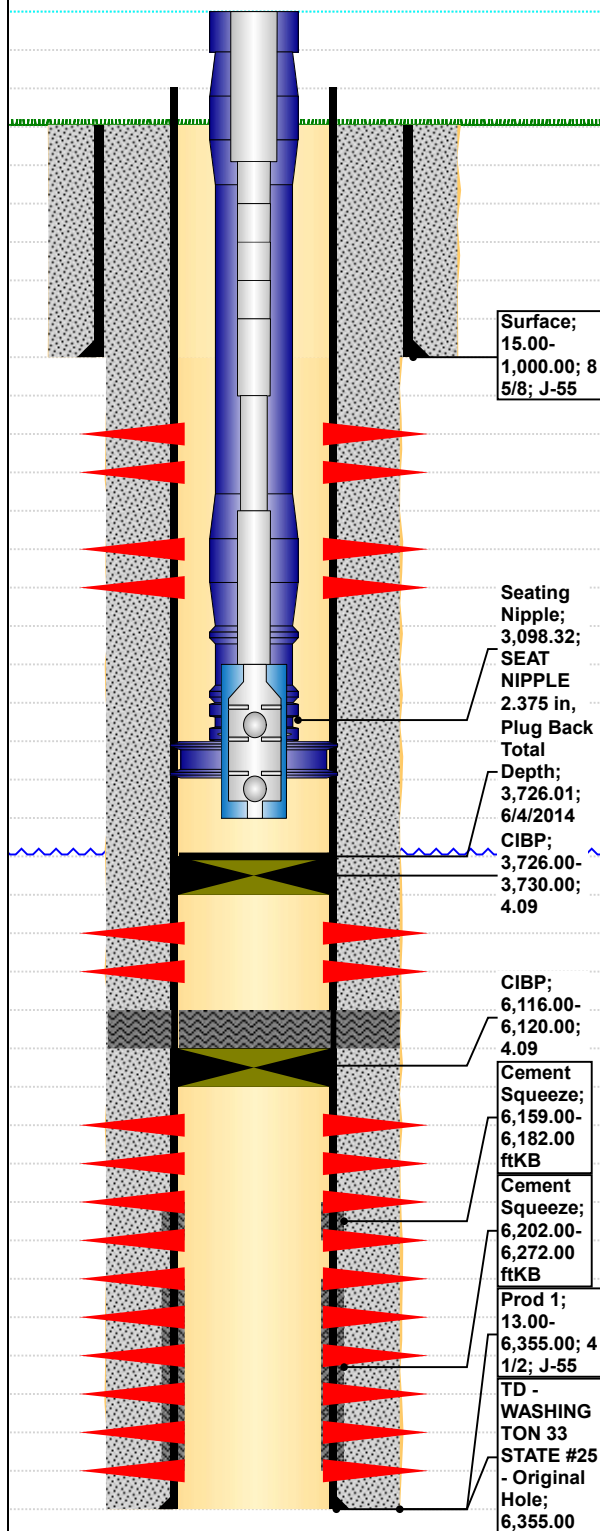

Wellbore Sections

Section Description Surface	Size (in) 11	Act Top (ftKB) 15.0	Act Btm (ftKB) 1,000.0	Start Date 5/8/1960
Section Description Prod 1	Size (in) 7 7/8	Act Top (ftKB) 1,000.0	Act Btm (ftKB) 6,355.0	Start Date 5/11/1960

Casing Strings

Csg Des	OD (in)	Wt/Len (lb/ft)	Grade	Set Depth (ftKB)
Surface	8 5/8	23.00	J-55	1,000.00
Prod 1	4 1/2	9.50	J-55	6,355.00

Cement Stages

String Surface, 1,000.00ftKB, 8 5/8	Top Depth (ftKB) 15.00	Bottom Depth (ftKB) 1,000.00
String Prod 1, 6,355.00ftKB, 4 1/2	Top Depth (ftKB) 15.00	Bottom Depth (ftKB) 6,355.00
String Prod 1, 6,355.00ftKB, 4 1/2	Top Depth (ftKB) 6,159.00	Bottom Depth (ftKB) 6,182.00
String Prod 1, 6,355.00ftKB, 4 1/2	Top Depth (ftKB) 6,202.00	Bottom Depth (ftKB) 6,272.00
String Prod 1, 6,355.00ftKB, 4 1/2	Top Depth (ftKB) 6,086.00	Bottom Depth (ftKB) 6,116.00

Tubing Strings

Tubing Description Tubing		Run Date 8/29/2007		String Length (ft) 3,103.52		Set Depth (ftKB) 3,103.5	
Item Des	Jts	Make/Manufacturer	Model	OD (in)	Wt (lb/ft)	Grade	Len (ft)
Tubing	1		T&C Non-Upset	2 3/8	4.70	N-80	10.00
Tubing Joint(s)	101			2 3/8	4.70	J-55	3,056.95
Tubing Joint(s)	1			2 3/8		J-55	31.37
Seating Nipple	1			2 3/8			1.10
Unknown	1			4 1/2	11.35	J-55	4.10

Rod Strings

Rod Description Rod		Run Date 6/4/2014		String Length (ft) 3,104.0		Set Depth (ftKB) 3,104.0		
Item Des		Jts	Make/Mfg.	Model	OD (in)	Wt (lb/ft)	Grade	Len (ft)
Polished Rod		1			1 1/4			16.00
Pony Rod(s)		1			7/8		C	4.00
Pony Rod(s)		1			7/8		C	4.00
Pony Rod(s)		1			7/8		C	6.00
Pony Rod(s)		1			7/8		C	8.00
Rod(s)		54			7/8		C	1,350.00
Rod(s)		42			3/4		C	1,050.00
Rod(s)		26			7/8		C	650.00
Plunger		1	_Generic Manufacturer		1 3/4			16.00

Other In Hole

Description CIBP	OD (in) 4.09	Top (ftKB) 3,726	Btm (ftKB) 3,730	Run Date 7/23/1999
Description CIBP	OD (in) 4.09	Top (ftKB) 6,116	Btm (ftKB) 6,120	Run Date 6/13/1991

Perforations

Date	Type	Top (ftKB)	Btm (ftKB)	Prop?	Shot Dens (shots/ft)	Entered Shot Total
4/17/1999	PERFORATED	1,502	2,188	No	1.0	33
8/12/1998	PERFORATED	2,452	3,008	No	1.0	51
6/27/1978	PERFORATED	6,057	6,068	No	2.0	22
6/27/1978	PERFORATED	6,128	6,136	No	2.0	24
6/27/1978	PERFORATED	6,159	6,182	No	2.0	24
6/17/1960	PERFORATED	6,202	6,222	No	1.0	20
6/17/1960	PERFORATED	6,233	6,246	No	1.0	33
6/17/1960	PERFORATED	6,255	6,272	No	1.0	17



WBD Current

Well Name: WASHINGTON 33 STATE #025

Reference Datum: KB

API/Surface Loc 3001501690	Surface Legal Location SEC 33, T17S, R28E	Field Name Empire	State/Province New Mexico	Well Purpose Production
Spud Date 5/8/1960 16:00	Original KB Elevation (ft) 3,683.0	Ground Elevation (ft) 3,668.0	KB-Ground Distance (ft) 15.0	
PBTD (All) (ftKB) Original Hole - 3,726		Total Depth All (TVD) (ftKB)		

Production, WASHINGTON 33 STATE #25 - Original Hole,
8/8/2023 10:46:26 AM

Vertical schematic (actual)

Plug Back Total Depths

Date 6/17/1960	Type	Depth (ftKB) 6,192	Depth (TVD) (ftKB)
Date 8/20/2007	Type	Depth (ftKB) 3,176	Depth (TVD) (ftKB)
Date 6/4/2014	Type	Depth (ftKB) 3,726	Depth (TVD) (ftKB)

Schematic Annotations

Start Date	Depth (ftKB)	Annotation
------------	--------------	------------

Stimulation Jobs

<typ1> on <dtmstart>

Min Top...	Max Bt...	R Treat...	P Treat...	P Treat...	Vol Clea...	Vol Clea...	Vol Slurr...	Vol Slurr...	Mass Pr...	Mass Pr...
------------	-----------	------------	------------	------------	-------------	-------------	--------------	--------------	------------	------------

Surface;
15.00-
1,000.00; 8
5/8; J-55Seating
Nipple;
3,098.32;
SEAT
NIPPLE
2.375 in,
Plug Back
Total
Depth;
3,726.01;
6/4/2014
CIBP;
3,726.00-
3,730.00;
4.09CIBP;
6,116.00-
6,120.00;
4.09Cement
Squeeze;
6,159.00-
6,182.00
ftKBCement
Squeeze;
6,202.00-
6,272.00
ftKBProd 1;
13.00-
6,355.00; 4
1/2; J-55TD -
WASHING
TON 33
STATE #25
- Original
Hole;
6,355.00

District I
1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720
District III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170
District IV
1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 255547

CONDITIONS

Operator: APACHE CORPORATION 303 Veterans Airpark Ln Midland, TX 79705	OGRID: 873
	Action Number: 255547
	Action Type: [C-103] NOI Temporary Abandonment (C-103I)

CONDITIONS

Created By	Condition	Condition Date
gcordero	None	8/24/2023