Office	State of New Me	exico	Form C-103	
<u>District I</u> – (575) 393-6161	Energy, Minerals and Natu	ıral Resources	Revised August 1, 2011	
1625 N. French Dr., Hobbs, NM 88240 District II – (575) 748-1283			WELL API NO. 30-025-38576 and 30-025-42139	
811 S. First St., Artesia, NM 88210	OIL CONSERVATION		5. Indicate Type of Lease	
<u>District III</u> – (505) 334-6178 1000 Rio Brazos Rd., Aztec, NM 87410	1220 South St. Fran		STATE FEE	
<u>District IV</u> – (505) 476-3460 1220 S. St. Francis Dr., Santa Fe, NM	Santa Fe, NM 87505		6. State Oil & Gas Lease No. V07530-0001	
	TICES AND REPORTS ON WELLS		7. Lease Name or Unit Agreement Name	
	DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		Linam AGI	
1. Type of Well: Oil Well	1. Type of Well: Oil Well ☐ Gas Well ☑ Other		8. Wells Number 1 and 2	
2. Name of Operator DCP Operating Company, LP			9. OGRID Number 36785	
3. Address of Operator 6900 E. Layton Ave, Suite 900, D	enver CO 80237		10. Pool name or Wildcat Wildcat	
4. Well Location				
	From the South line and 1980 feet from	om the West line		
Section 30	Township 18S	Range 37E	NMPM County Lea	
	11. Elevation (Show whether DR)			
12. Check Appropriate Box to	3736 GR Indicate Nature of Notice, Re	eport or Other Da	ata	
		- !		
NOTICE OF II PERFORM REMEDIAL WORK □	NTENTION TO: PLUG AND ABANDON □	REMEDIAL WOR	SEQUENT REPORT OF: K ☐ ALTERING CASING ☐	
TEMPORARILY ABANDON	CHANGE PLANS	COMMENCE DRI		
PULL OR ALTER CASING	_	CASING/CEMEN		
DOWNHOLE COMMINGLE				
OTHER:			Report pursuant to Workover C-103	
			give pertinent dates, including estimated date pletions: Attach wellbore diagram of	
proposed completion or reco	ompletion.		GI #1 and AGI #2	
proposed completion or record Report for the Month ending July This is the 135th monthly submittal of annulus pressure and bottom hole data	ompletion. 31, 2023 Pursuant to Workover Confidence of data as agreed between DCP and Confidence of the data for Linam AGI #1. Since the data	-103 for Linam AG OCD relative to inject for both wells prov	ction pressure, TAG temperature and casing	
proposed completion or record Report for the Month ending July This is the 135 th monthly submittal or annulus pressure and bottom hole darperformance of the AGI system, the quarterly basis for AGI #2. All flow this month was directed to A1, 2, 3, 4): Average Injection Rate 0 Annulus Pressure: 37 psig, Average	ompletion. 31, 2023 Pursuant to Workover Conference of data as agreed between DCP and Conference of Linam AGI #1. Since the data data for both wells are analyzed and AGI #2. Injection parameters being scf/hr, Average TAG Injection Pressure Differential: 1,312 psig. Both temperature of 137 °F (Figures 8 at #2. The BH pressure decreased significant processing statements of the pressure decreased significant processing statements.)	PCD relative to inject for both wells prove presented herein even monitored for AGI structures 1,349 psig, Avottom hole (BH) sens and 9). The BH presinificantly from last the process of	etion pressure, TAG temperature and casing ride the best overall picture of the en though that analysis is required only on a #1 (currently static) were as follows (Figures rerage TAG Temperature: 90 °F, Average sors provided the average BH pressure for sure and temperature are clearly quickly month, in keeping with the previous	
proposed completion or record Report for the Month ending July This is the 135 th monthly submittal or annulus pressure and bottom hole date performance of the AGI system, the quarterly basis for AGI #2. All flow this month was directed to A1, 2, 3, 4): Average Injection Rate 0 Annulus Pressure: 37 psig, Average the entire period of 4,331 psig and B responding to the switchover to AGI observations when AGI #1 was idle. The recorded injection parameters for	ompletion. 31, 2023 Pursuant to Workover Control of data as agreed between DCP and Control of Linam AGI #1. Since the data data for both wells are analyzed and AGI #2. Injection parameters being setf/hr, Average TAG Injection Pressure Differential: 1,312 psig. Both temperature of 137 °F (Figures 8 at #2. The BH pressure decreased signature). This is a very good indication of the AGI #2 for the month were: Average TAGI #2 for the month were: Average TAGI #2 for the month were: Average TAGI #2 for the month were:	PCD relative to inject of for both wells prove presented herein even monitored for AGI assure: 1,349 psig, Avoittom hole (BH) sension and 9). The BH presentificantly from last are continued resilient age Injection Rate 1	etion pressure, TAG temperature and casing ride the best overall picture of the en though that analysis is required only on a #1 (currently static) were as follows (Figures rerage TAG Temperature: 90 °F, Average sors provided the average BH pressure for sure and temperature are clearly quickly month, in keeping with the previous	
proposed completion or recorded report for the Month ending July. This is the 135 th monthly submittal of annulus pressure and bottom hole darperformance of the AGI system, the equarterly basis for AGI #2. All flow this month was directed to A1, 2, 3, 4): Average Injection Rate 0 Annulus Pressure: 37 psig, Average the entire period of 4,331 psig and B responding to the switchover to AGI observations when AGI #1 was idle. The recorded injection parameters for used this month), Average Injection 1 Average Pressure Differential: 1,476 The Linam AGI #1 and AGI #2 well-sequester, Class II wastes consisting	ompletion. 31, 2023 Pursuant to Workover Completion. 31, 2023 Pursuant to Workover Complete State of the AGI #1. Since the data data for Linam AGI #1. Since the data data for both wells are analyzed and AGI #2. Injection parameters being soft/hr, Average TAG Injection Pressure Differential: 1,312 psig. Both temperature of 137 °F (Figures 8 at #2. The BH pressure decreased significant to the AGI #2 for the month were: Average TAGI #2 for the month were: Average TAGI psig (Figures 5, 6, 7). Is are serving as a safe, effective and of H ₂ S and CO ₂ . The Linam AGI Fare required redundancy to the plant to	PCD relative to inject of for both wells prove presented herein even monitored for AGI assure: 1,349 psig, Avoittom hole (BH) sense and 9). The BH presentificantly from last are continued resilient age Injection Rate 1 Temperature: 106 °F environmentally frie acility permanently that allows for opera	etion pressure, TAG temperature and casing ride the best overall picture of the een though that analysis is required only on a #1 (currently static) were as follows (Figures rerage TAG Temperature: 90 °F, Average sors provided the average BH pressure for sure and temperature are clearly quickly month, in keeping with the previous are of the injection zone. 57,475 scf/hr (AGI #2 was the only well F, Average Annulus Pressure: 40 psig, endly system to dispose of, and permanently sequestered 4,864 Metric Tons of CO ₂ for attion with disposal to either or both wells. I	
proposed completion or recorder for the Month ending July This is the 135 th monthly submittal or annulus pressure and bottom hole darperformance of the AGI system, the quarterly basis for AGI #2. All flow this month was directed to A1, 2, 3, 4): Average Injection Rate 0 Annulus Pressure: 37 psig, Average the entire period of 4,331 psig and B responding to the switchover to AGI observations when AGI #1 was idle. The recorded injection parameters for used this month), Average Injection 1 Average Pressure Differential: 1,476 The Linam AGI #1 and AGI #2 well-sequester, Class II wastes consisting this month. The two wells provide the	ompletion. 31, 2023 Pursuant to Workover Control of data as agreed between DCP and Control of the for Linam AGI #1. Since the data data for both wells are analyzed and AGI #2. Injection parameters being set/hr, Average TAG Injection Pressure Differential: 1,312 psig. Book Hemperature of 137 °F (Figures 8 at #2. The BH pressure decreased signature of the pressure: 1,517 psig, Average TAG psig (Figures 5, 6, 7). So are serving as a safe, effective and of H ₂ S and CO ₂ . The Linam AGI Fine required redundancy to the plant to the power is true and complete to the best	PCD relative to inject of for both wells prove presented herein events and 9. The BH presentificantly from last and 9. The BH presentificantly from last are continued resilient age Injection Rate 1 Temperature: 106 °F environmentally friestility permanently that allows for operator of my knowledge as	etion pressure, TAG temperature and casing ride the best overall picture of the een though that analysis is required only on a #1 (currently static) were as follows (Figures rerage TAG Temperature: 90 °F, Average sors provided the average BH pressure for sure and temperature are clearly quickly month, in keeping with the previous are of the injection zone. 57,475 scf/hr (AGI #2 was the only well F, Average Annulus Pressure: 40 psig, endly system to dispose of, and permanently sequestered 4,864 Metric Tons of CO ₂ for ation with disposal to either or both wells. I and belief.	
proposed completion or recorder for the Month ending July This is the 135 th monthly submittal or annulus pressure and bottom hole darperformance of the AGI system, the quarterly basis for AGI #2. All flow this month was directed to A1, 2, 3, 4): Average Injection Rate 0 Annulus Pressure: 37 psig, Average the entire period of 4,331 psig and B responding to the switchover to AGI observations when AGI #1 was idle. The recorded injection parameters for used this month), Average Injection 1 Average Pressure Differential: 1,476 The Linam AGI #1 and AGI #2 wells sequester, Class II wastes consisting this month. The two wells provide the hereby certify that the information above	f data as agreed between DCP and C ta for Linam AGI #1. Since the data data for both wells are analyzed and AGI #2. Injection parameters being scf/hr, Average TAG Injection Pressure Differential: 1,312 psig. Bo H temperature of 137 °F (Figures 8 at #2. The BH pressure decreased signary This is a very good indication of the AGI #2 for the month were: Average TAG psig (Figures 5, 6, 7). Is are serving as a safe, effective and of H ₂ S and CO ₂ . The Linam AGI Fine required redundancy to the plant to the power is true and complete to the best TITLE Consultant to DCP	PCD relative to inject of for both wells prove presented herein events and 9. The BH presentificantly from last and 9. The BH presentificantly from last are continued resilient age Injection Rate 1 Temperature: 106 °F environmentally friestility permanently that allows for operator of my knowledge as	etion pressure, TAG temperature and casing ride the best overall picture of the een though that analysis is required only on a #1 (currently static) were as follows (Figures rerage TAG Temperature: 90 °F, Average sors provided the average BH pressure for sure and temperature are clearly quickly month, in keeping with the previous are of the injection zone. 57,475 scf/hr (AGI #2 was the only well F, Average Annulus Pressure: 40 psig, endly system to dispose of, and permanently sequestered 4,864 Metric Tons of CO ₂ for attion with disposal to either or both wells. I	
proposed completion or recorder for the Month ending July This is the 135 th monthly submittal or annulus pressure and bottom hole darperformance of the AGI system, the quarterly basis for AGI #2. All flow this month was directed to A1, 2, 3, 4): Average Injection Rate 0 Annulus Pressure: 37 psig, Average the entire period of 4,331 psig and B responding to the switchover to AGI observations when AGI #1 was idle. The recorded injection parameters for used this month), Average Injection 1 Average Pressure Differential: 1,476 The Linam AGI #1 and AGI #2 wells sequester, Class II wastes consisting this month. The two wells provide the hereby certify that the information at SIGNATURE	f data as agreed between DCP and C ta for Linam AGI #1. Since the data data for both wells are analyzed and AGI #2. Injection parameters being scf/hr, Average TAG Injection Pressure Differential: 1,312 psig. Bo H temperature of 137 °F (Figures 8 at #2. The BH pressure decreased signary This is a very good indication of the AGI #2 for the month were: Average TAG psig (Figures 5, 6, 7). Is are serving as a safe, effective and of H ₂ S and CO ₂ . The Linam AGI Fine required redundancy to the plant to the power is true and complete to the best TITLE Consultant to DCP	PCD relative to inject of for both wells prove presented herein even monitored for AGI assure: 1,349 psig, Avoittom hole (BH) sense and 9). The BH presentificantly from last are continued resilient age Injection Rate 1 Temperature: 106 °FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF	etion pressure, TAG temperature and casing ride the best overall picture of the en though that analysis is required only on a #1 (currently static) were as follows (Figures rerage TAG Temperature: 90 °F, Average sors provided the average BH pressure for sure and temperature are clearly quickly month, in keeping with the previous are of the injection zone. 57,475 scf/hr (AGI #2 was the only well F, Average Annulus Pressure: 40 psig, endly system to dispose of, and permanently sequestered 4,864 Metric Tons of CO ₂ for attion with disposal to either or both wells. In the belief.	

Figure #1: Linam AGI #1 and #2 Combined TAG Injection Flow Rate

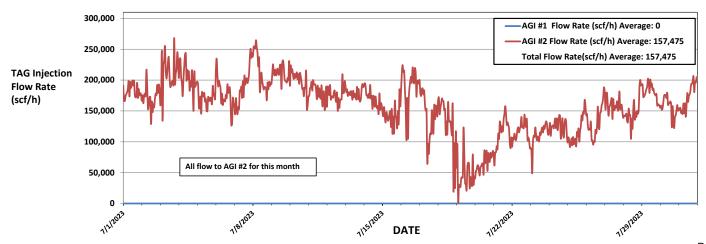


Figure #2: Linam AGI #1 Surface TAG Injection Pressure and Annular Pressure

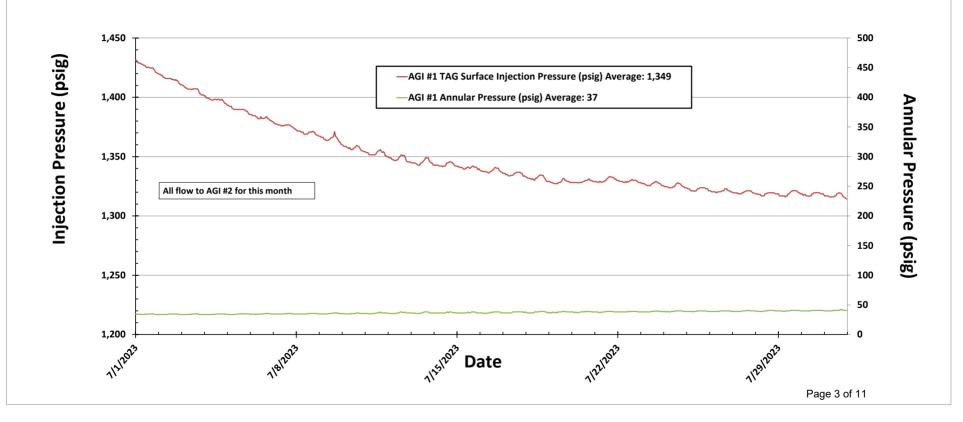


Figure #3: Linam AGI #1 TAG Injection Pressure, Casing Annulus Pressure and TAG Injection Temperature

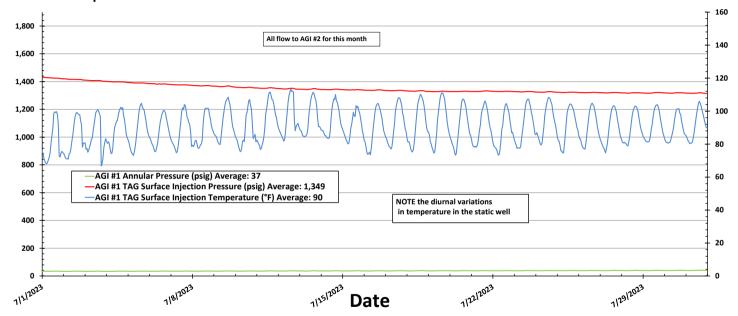


Figure #4: Linam AGI #1 TAG Injection Pressure and Casing Annular Pressure Differential

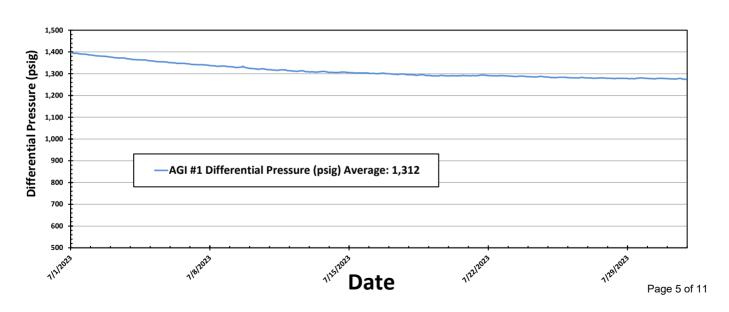


Figure #5: Linam AGI #2 Injection Pressure, Rate and Casing Annulus Pressure

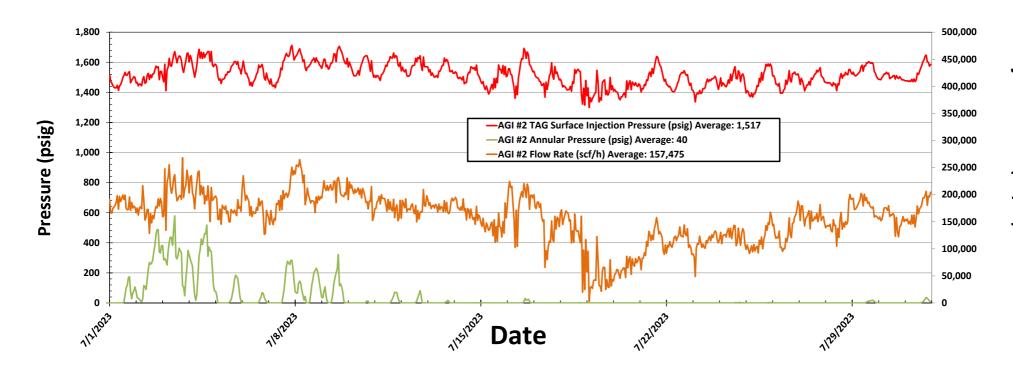


Figure #6: Linam AGI #2 TAG Injection Pressure, Casing Annulus Pressure and TAG Injection Temperature

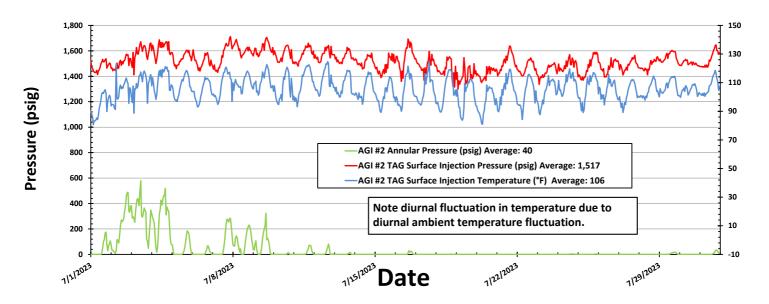


FIGURE #7: LINAM AGI #2 TAG INJECTION PRESSURE AND CASING ANNULAR PRESSURE DIFFERENTIAL (PSIG)

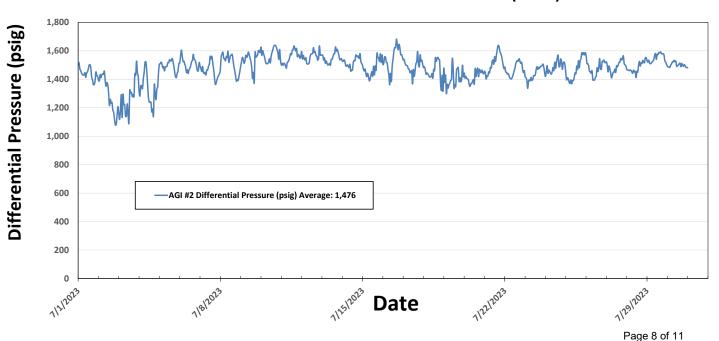


Figure #8: Linam AGI #1 Bottom Hole Pressure and Temperature

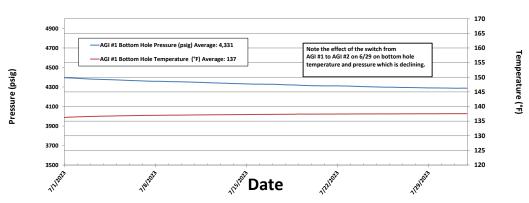


Figure #9: Linam AGI #1 Surface Injection Pressure and Bottom Hole Pressure


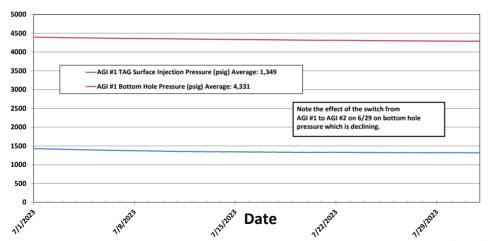


Figure #10: Linam AGI Facility Daily Metric Tons of Carbon Sequestered

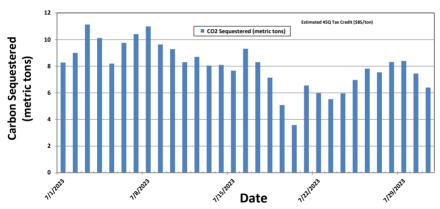

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

District II 811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

CONDITIONS

Action 266258

CONDITIONS

Operator:	OGRID:
DCP OPERATING COMPANY, LP	36785
6900 E. Layton Ave	Action Number:
Denver, CO 80237	266258
	Action Type:
	[C-103] Sub. General Sundry (C-103Z)

CONDITIONS

Created	Ву	Condition	Condition Date
mgebr	remichael	None	10/3/2023